

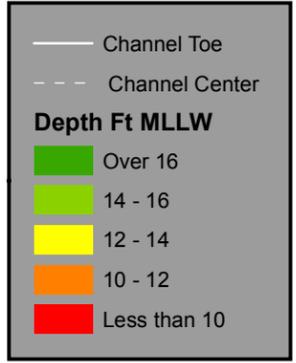

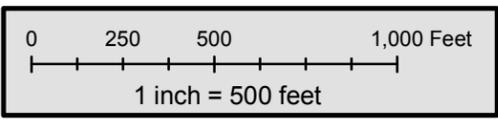


Notes:

- Soundings are expressed in positive feet and tenths and are referenced the Mean Lower Low Water (MLLW) datum
- Project surveyed with USACE survey vessels equipped with GPS positioning and hydrographic survey equipment that meets USACE Navigation and Dredging standards for soft bottom hydrographic surveys.
- Soundings are calibrated to tide gauges that are set to MLLW and referenced to published benchmarks
- Horizontal Datum: State Plane NAD-83 SC-3900 Intl Feet
- Project was designed by the Charleston District of the U.S. Army Corps of Engineers. The initials or signatures and registration designations of individuals appear on these project documents within the scope of their employment by ER 1110-1-8152
- Maps and associated information represents the result of surveys made on the date indicated and can only be considered as indicating the general condition existing at that time. These conditions are subject to rapid change due to shoaling events. A prudent mariner should not rely exclusively on the information provided here
- Aids to Navigation obtained from the U.S. Coast Guard Light List

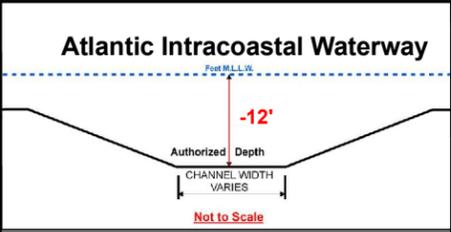

Survey Area: Atlantic Intracoastal Waterway - Bucksport to Winyah Bay	
Survey Date:	11-2010
Survey Crew:	Morton, Wright, Foss
Survey File Name:	Waccamaw_Complete.xyz
Imagery/Background:	2006 DNR False IR DOQQ
Mapped By:	C. Brewer

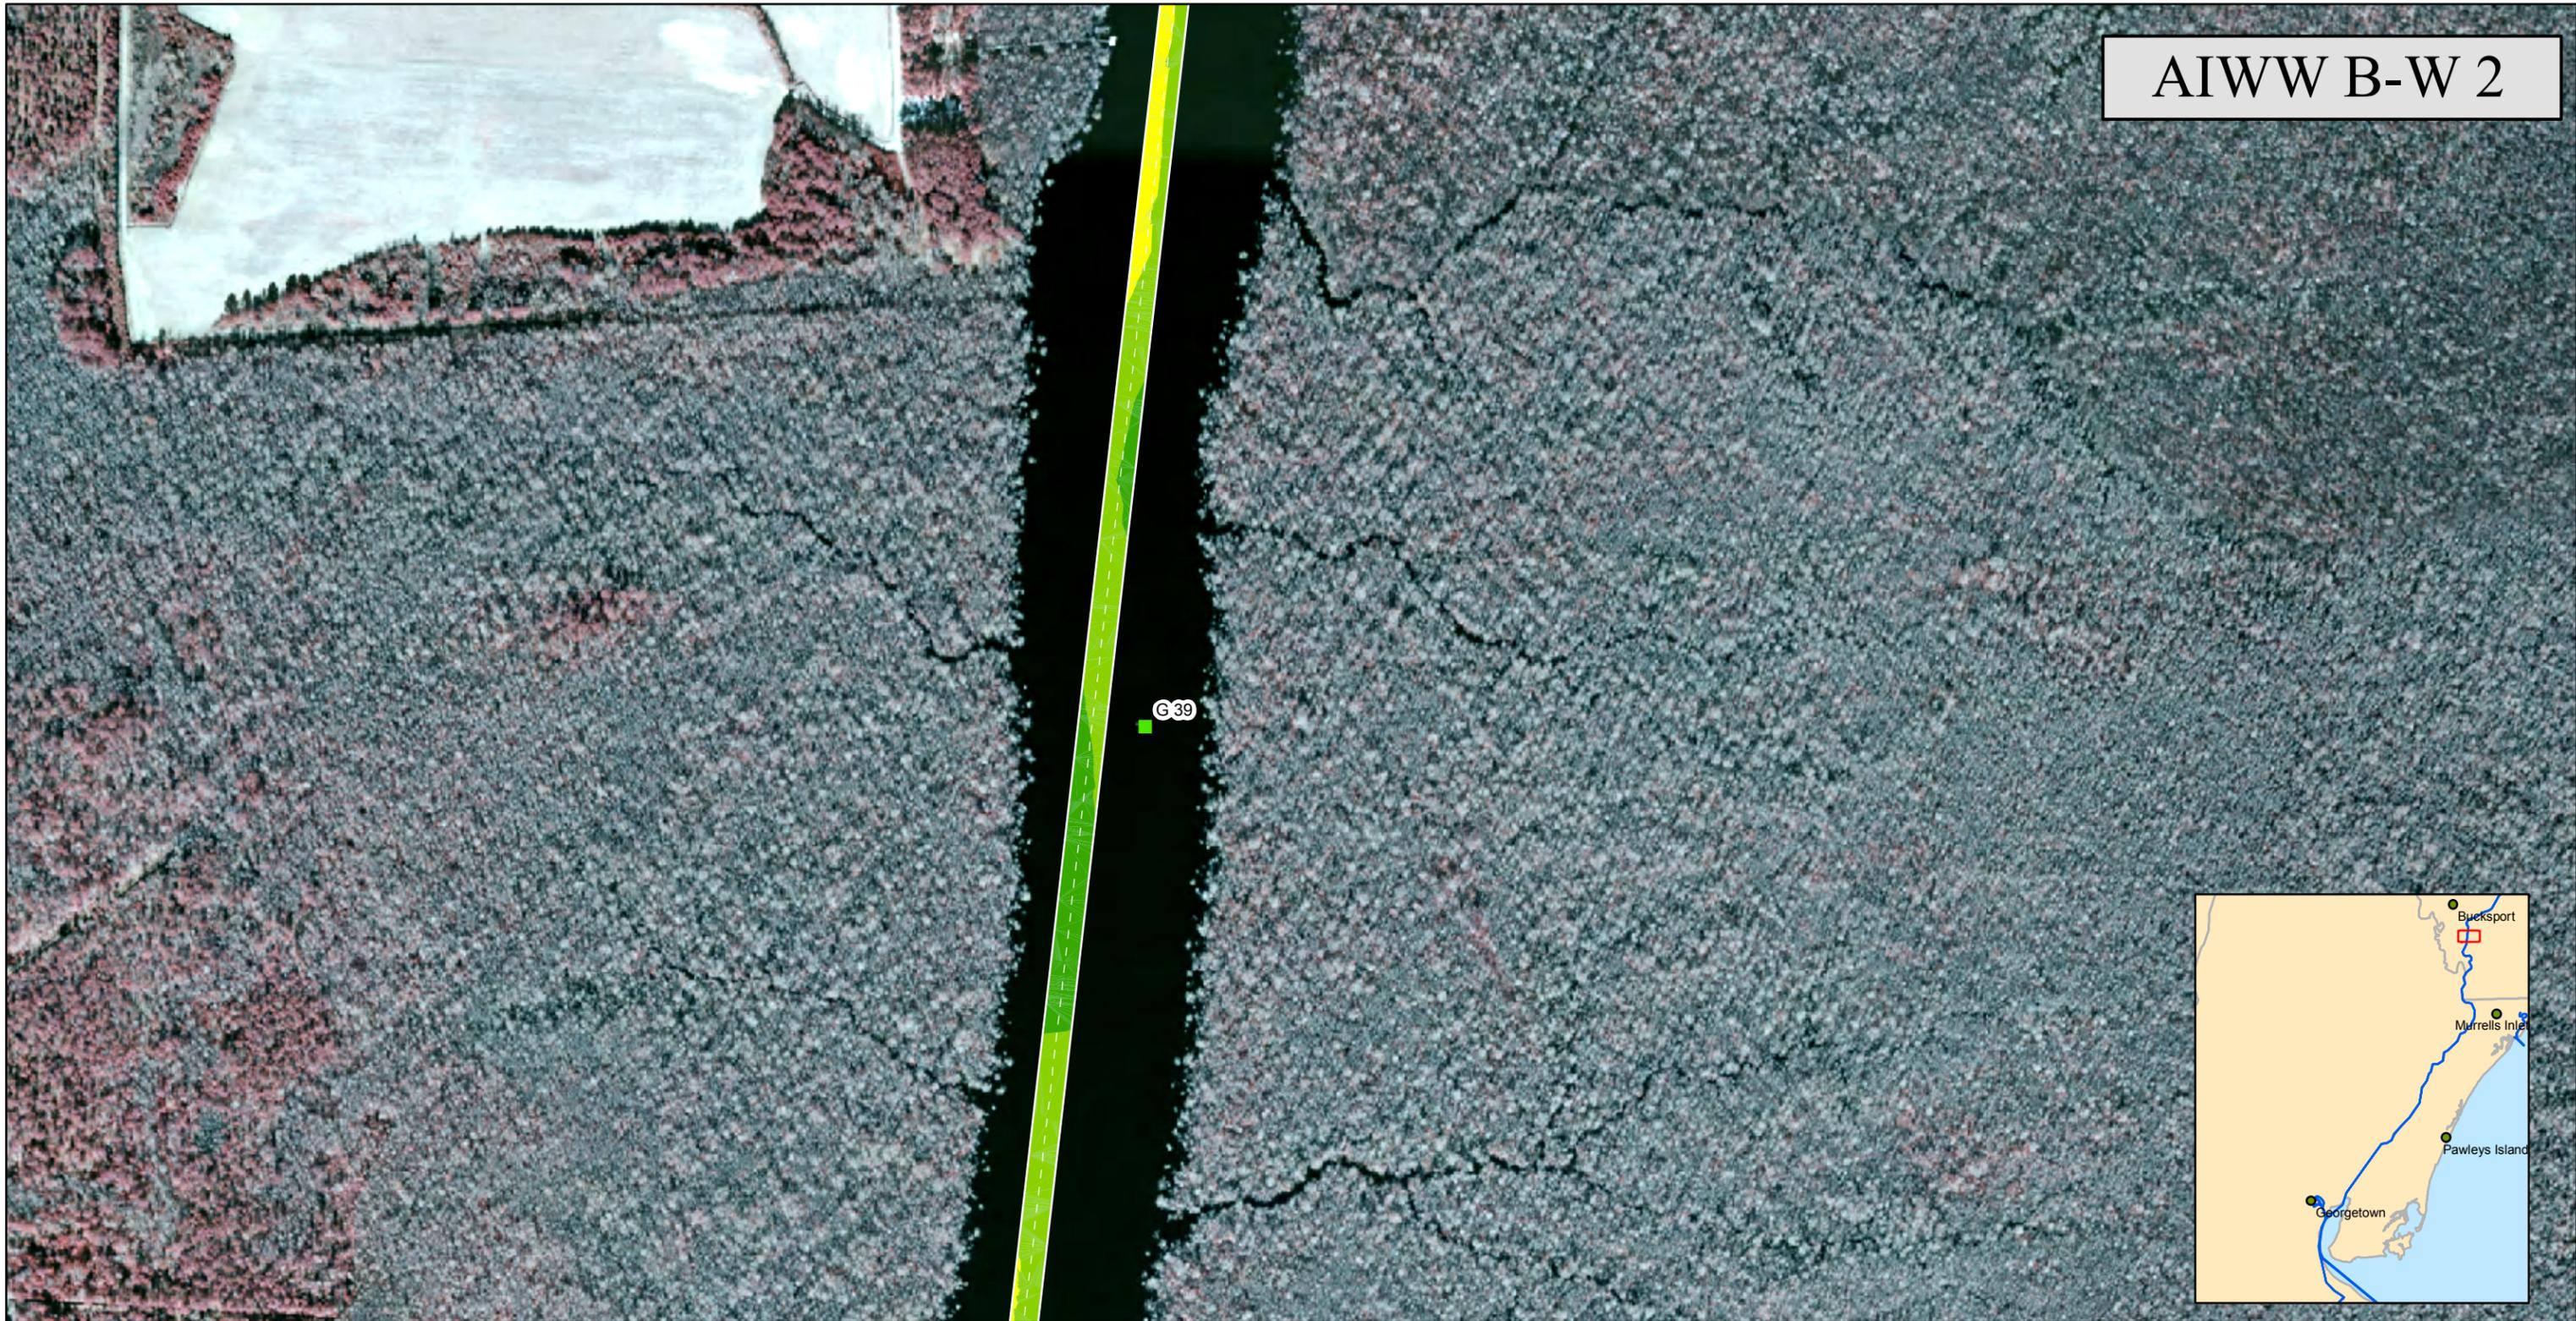

Notes:
 - Soundings are expressed in positive feet and tenths and are referenced the Mean Lower Low Water (MLLW) datum
 - Project surveyed with USACE survey vessels equipped with GPS positioning and hydrographic survey equipment that meets USACE Navigation and Dredging standards for soft bottom hydrographic surveys.
 - Soundings are calibrated to tide gauges that are set to MLLW and referenced to published benchmarks
 - Horizontal Datum: State Plane NAD-83 SC-3900 Intl Feet
 - Project was designed by the Charleston District of the U.S. Army Corps of Engineers. The initials or signatures and registration designations of individuals appear on these project documents within the scope of their employment by ER 1110-1-8152
 - Maps and associated information represents the result of surveys made on the date indicated and can only be considered as indicating the general condition existing at that time. These conditions are subject to rapid change due to shoaling events. A prudent mariner should not rely exclusively on the information provided here
 - Aids to Navigation obtained from the U.S. Coast Guard Light List





— Channel Toe
 - - - Channel Center

Depth Ft MLLW

- Over 16
- 14 - 16
- 12 - 14
- 10 - 12
- Less than 10




Survey Area: Atlantic Intracoastal Waterway - Bucksport to Winyah Bay	
Survey Date:	11-2010
Survey Crew:	Morton, Wright, Foss
Survey File Name:	Waccamaw_Complete.xyz
Imagery/Background:	2006 DNR False IR DOQQ
Mapped By:	C. Brewer

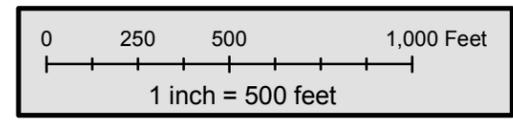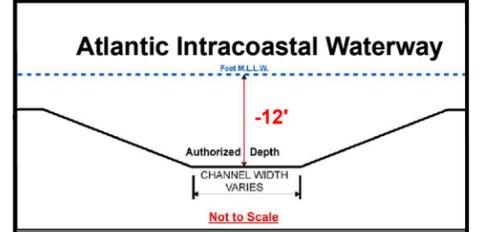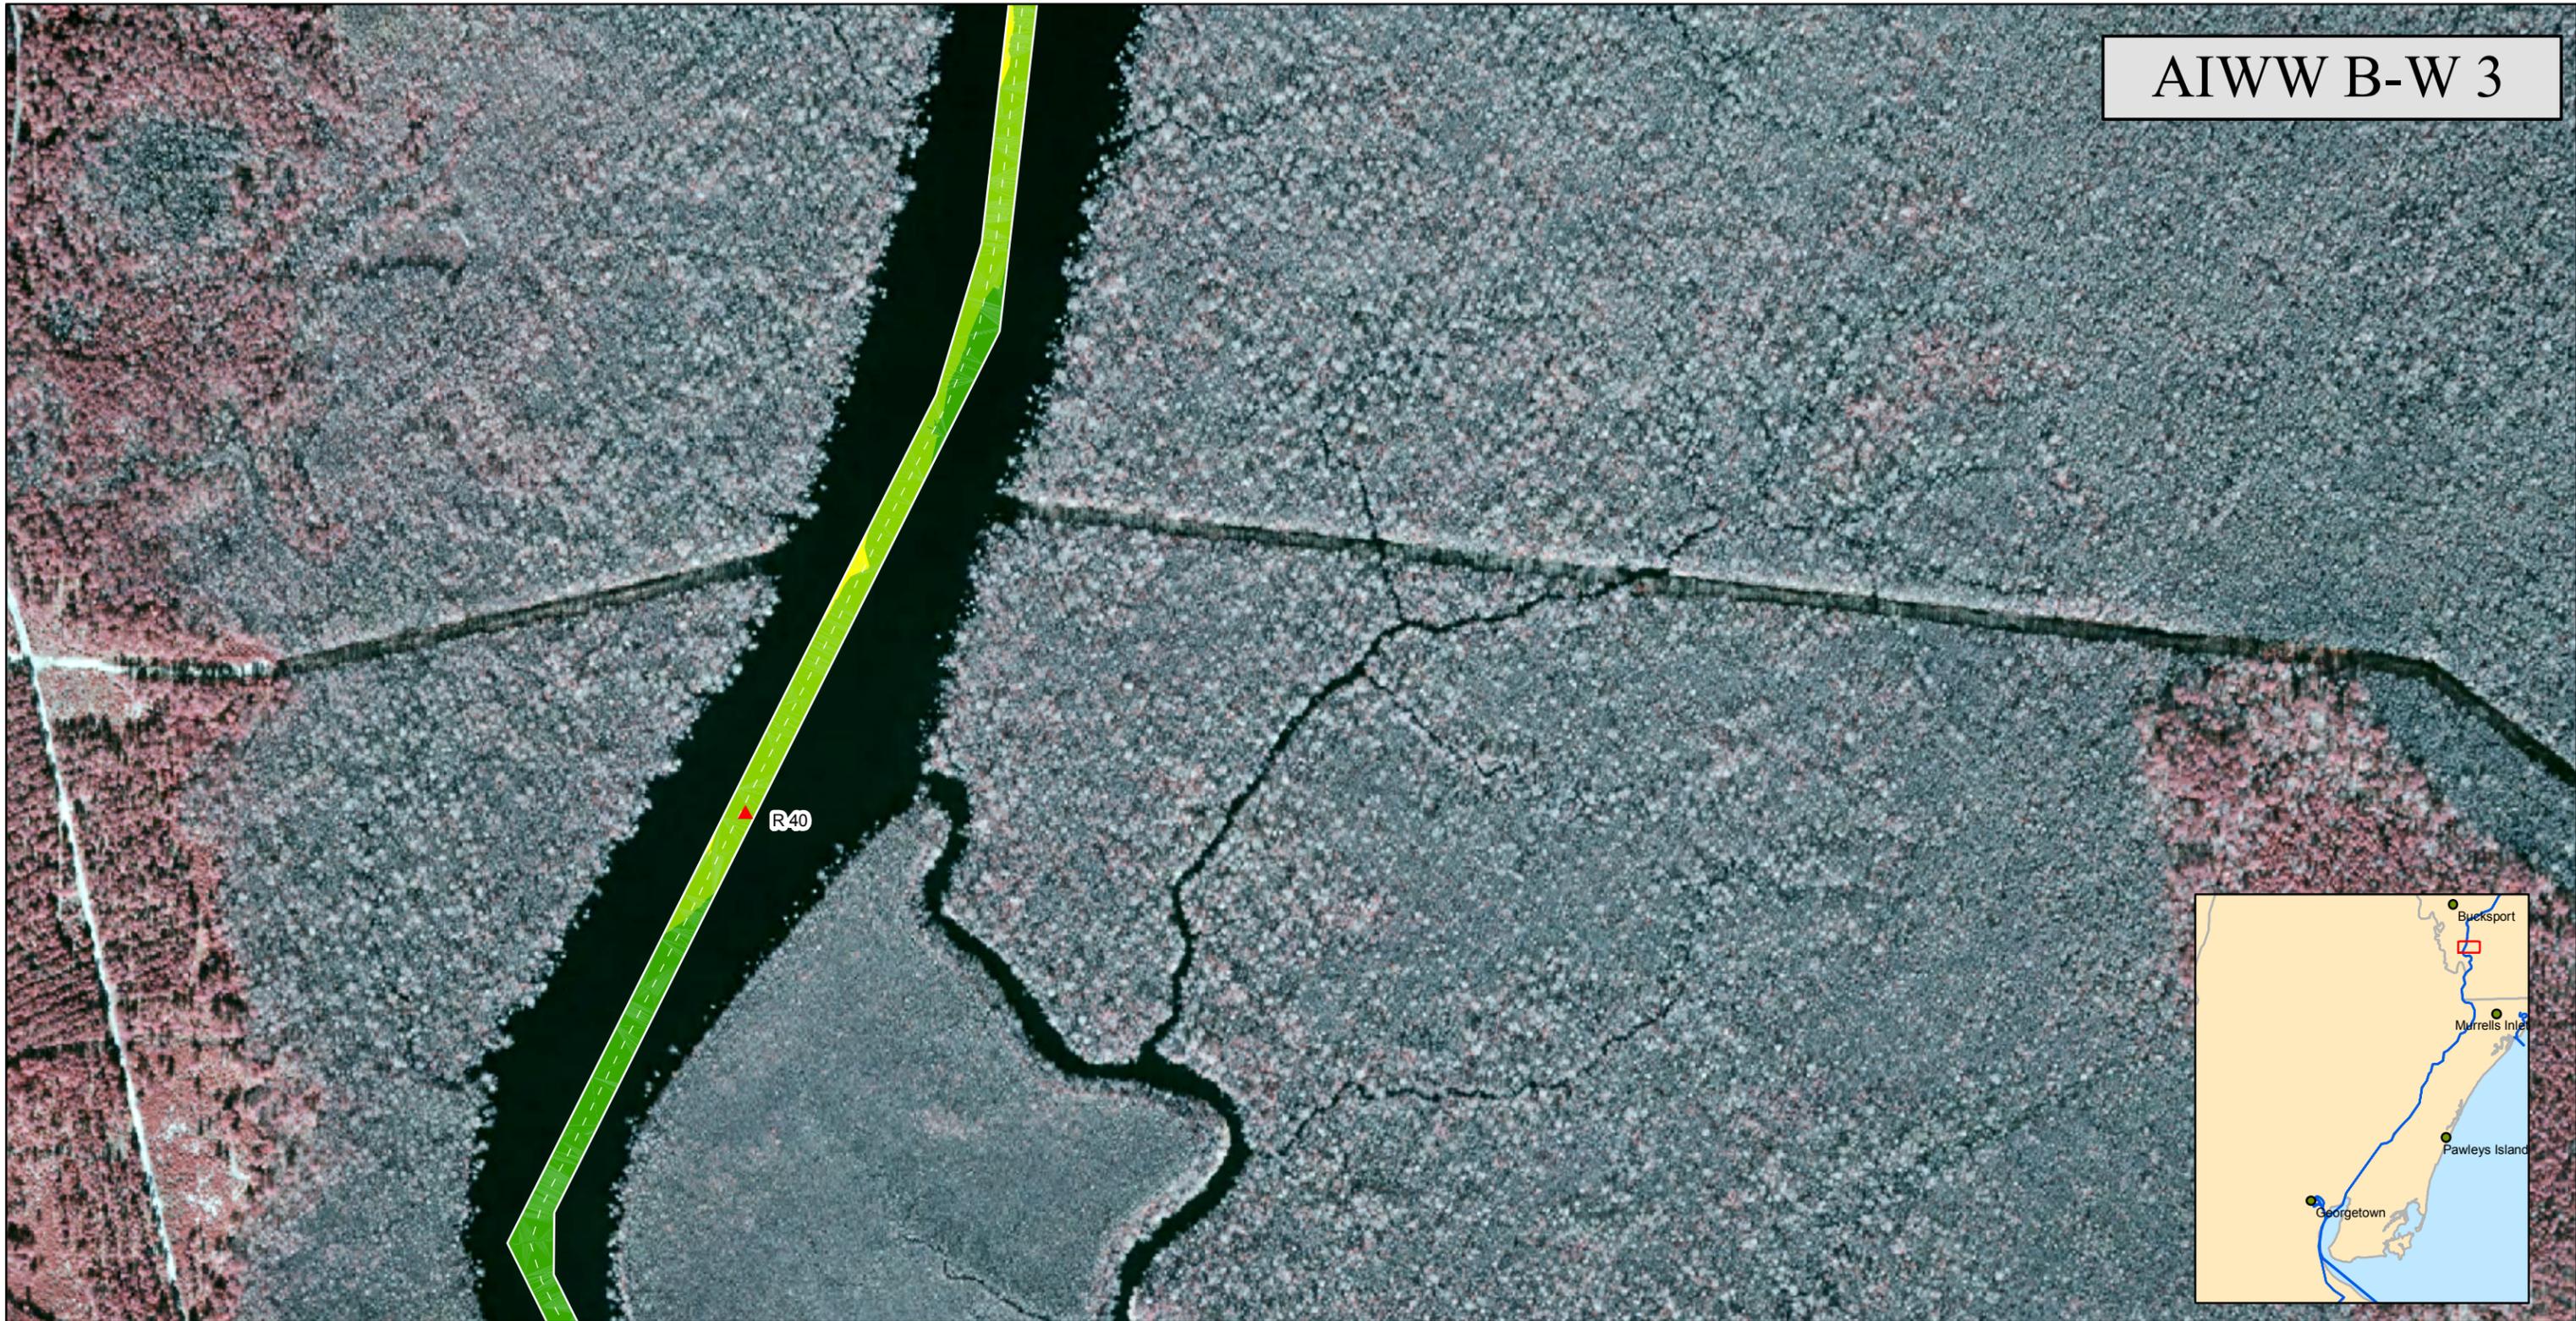

Notes:




- Soundings are expressed in positive feet and tenths and are referenced the Mean Lower Low Water (MLLW) datum
- Project surveyed with USACE survey vessels equipped with GPS positioning and hydrographic survey equipment that meets USACE Navigation and Dredging standards for soft bottom hydrographic surveys.
- Soundings are calibrated to tide gauges that are set to MLLW and referenced to published benchmarks
- Horizontal Datum: State Plane NAD-83 SC-3900 Intl Feet
- Project was designed by the Charleston District of the U.S. Army Corps of Engineers. The initials or signatures and registration designations of individuals appear on these project documents within the scope of their employment by ER 1110-1-8152
- Maps and associated information represents the result of surveys made on the date indicated and can only be considered as indicating the general condition existing at that time. These conditions are subject to rapid change due to shoaling events. A prudent mariner should not rely exclusively on the information provided here
- Aids to Navigation obtained from the U.S. Coast Guard Light List

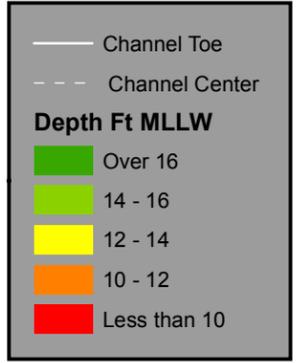




**US Army Corps
Of Engineers®
Charleston District**

Survey Area: Atlantic Intracoastal Waterway - Bucksport to Winyah Bay	
Survey Date:	11-2010
Survey Crew:	Morton, Wright, Foss
Survey File Name:	Waccamaw_Complete.xyz
Imagery/Background:	2006 DNR False IR DOQQ
Mapped By:	C. Brewer

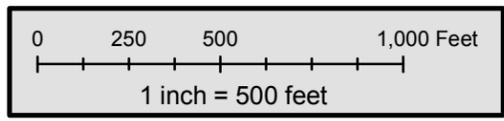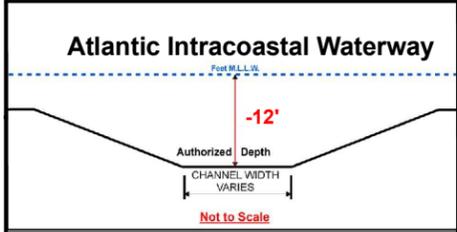




Notes:

- Soundings are expressed in positive feet and tenths and are referenced the Mean Lower Low Water (MLLW) datum
- Project surveyed with USACE survey vessels equipped with GPS positioning and hydrographic survey equipment that meets USACE Navigation and Dredging standards for soft bottom hydrographic surveys.
- Soundings are calibrated to tide gauges that are set to MLLW and referenced to published benchmarks
- Horizontal Datum: State Plane NAD-83 SC-3900 Intl Feet
- Project was designed by the Charleston District of the U.S. Army Corps of Engineers. The initials or signatures and registration designations of individuals appear on these project documents within the scope of their employment by ER 1110-1-8152
- Maps and associated information represents the result of surveys made on the date indicated and can only be considered as indicating the general condition existing at that time. These conditions are subject to rapid change due to shoaling events. A prudent mariner should not rely exclusively on the information provided here
- Aids to Navigation obtained from the U.S. Coast Guard Light List

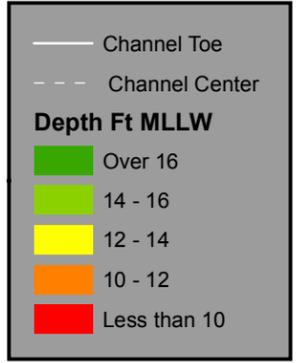


Survey Area: Atlantic Intracoastal Waterway - Bucksport to Winyah Bay	
Survey Date:	11-2010
Survey Crew:	Morton, Wright, Foss
Survey File Name:	Waccamaw_Complete.xyz
Imagery/Background:	2006 DNR False IR DOQQ
Mapped By:	C. Brewer

AIWW B-W 5


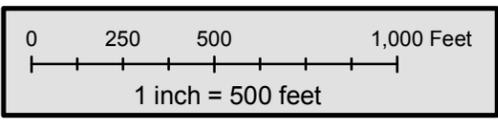
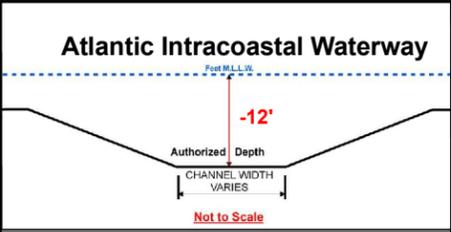


Notes:


- Soundings are expressed in positive feet and tenths and are referenced the Mean Lower Low Water (MLLW) datum
- Project surveyed with USACE survey vessels equipped with GPS positioning and hydrographic survey equipment that meets USACE Navigation and Dredging standards for soft bottom hydrographic surveys.
- Soundings are calibrated to tide gauges that are set to MLLW and referenced to published benchmarks
- Horizontal Datum: State Plane NAD-83 SC-3900 Intl Feet
- Project was designed by the Charleston District of the U.S. Army Corps of Engineers. The initials or signatures and registration designations of individuals appear on these project documents within the scope of their employment by ER 1110-1-8152
- Maps and associated information represents the result of surveys made on the date indicated and can only be considered as indicating the general condition existing at that time. These conditions are subject to rapid change due to shoaling events. A prudent mariner should not rely exclusively on the information provided here
- Aids to Navigation obtained from the U.S. Coast Guard Light List

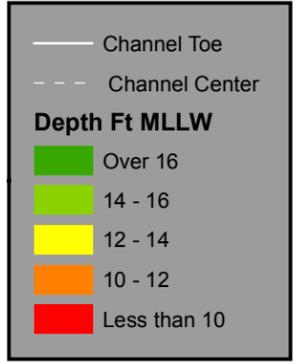




Survey Area: Atlantic Intracoastal Waterway - Bucksport to Winyah Bay	
Survey Date:	11-2010
Survey Crew:	Morton, Wright, Foss
Survey File Name:	Waccamaw_Complete.xyz
Imagery/Background:	2006 DNR False IR DOQQ
Mapped By:	C. Brewer

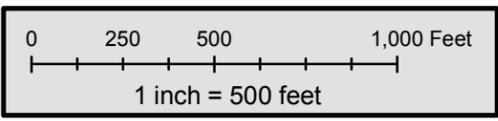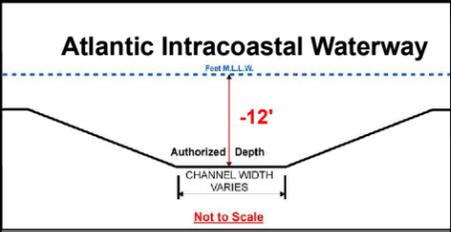

Notes:
 - Soundings are expressed in positive feet and tenths and are referenced the Mean Lower Low Water (MLLW) datum
 - Project surveyed with USACE survey vessels equipped with GPS positioning and hydrographic survey equipment that meets USACE Navigation and Dredging standards for soft bottom hydrographic surveys.
 - Soundings are calibrated to tide gauges that are set to MLLW and referenced to published benchmarks
 - Horizontal Datum: State Plane NAD-83 SC-3900 Intl Feet
 - Project was designed by the Charleston District of the U.S. Army Corps of Engineers. The initials or signatures and registration designations of individuals appear on these project documents within the scope of their employment by ER 1110-1-8152
 - Maps and associated information represents the result of surveys made on the date indicated and can only be considered as indicating the general condition existing at that time. These conditions are subject to rapid change due to shoaling events. A prudent mariner should not rely exclusively on the information provided here
 - Aids to Navigation obtained from the U.S. Coast Guard Light List

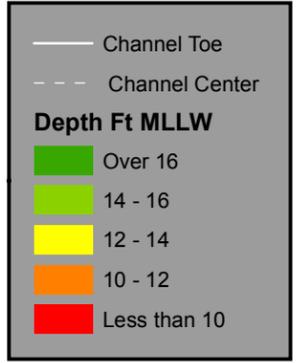


Survey Area: Atlantic Intracoastal Waterway - Bucksport to Winyah Bay	
Survey Date:	11-2010
Survey Crew:	Morton, Wright, Foss
Survey File Name:	Waccamaw_Complete.xyz
Imagery/Background:	2006 DNR False IR DOQQ
Mapped By:	C. Brewer



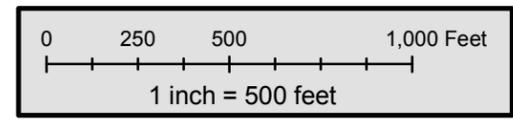
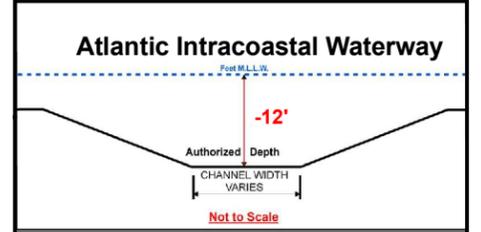


Notes:

- Soundings are expressed in positive feet and tenths and are referenced the Mean Lower Low Water (MLLW) datum
- Project surveyed with USACE survey vessels equipped with GPS positioning and hydrographic survey equipment that meets USACE Navigation and Dredging standards for soft bottom hydrographic surveys.
- Soundings are calibrated to tide gauges that are set to MLLW and referenced to published benchmarks
- Horizontal Datum: State Plane NAD-83 SC-3900 Intl Feet
- Project was designed by the Charleston District of the U.S. Army Corps of Engineers. The initials or signatures and registration designations of individuals appear on these project documents within the scope of their employment by ER 1110-1-8152
- Maps and associated information represents the result of surveys made on the date indicated and can only be considered as indicating the general condition existing at that time. These conditions are subject to rapid change due to shoaling events. A prudent mariner should not rely exclusively on the information provided here
- Aids to Navigation obtained from the U.S. Coast Guard Light List

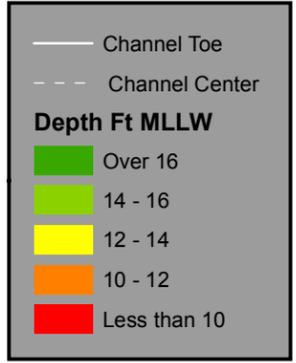

Survey Area: Atlantic Intracoastal Waterway - Bucksport to Winyah Bay	
Survey Date:	11-2010
Survey Crew:	Morton, Wright, Foss
Survey File Name:	Waccamaw_Complete.xyz
Imagery/Background:	2006 DNR False IR DOQQ
Mapped By:	C. Brewer

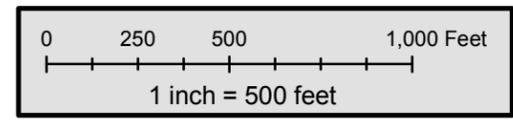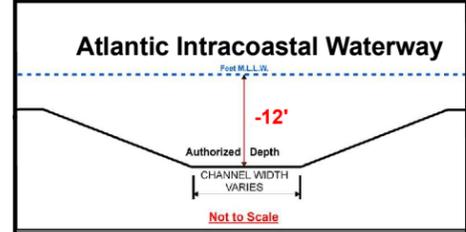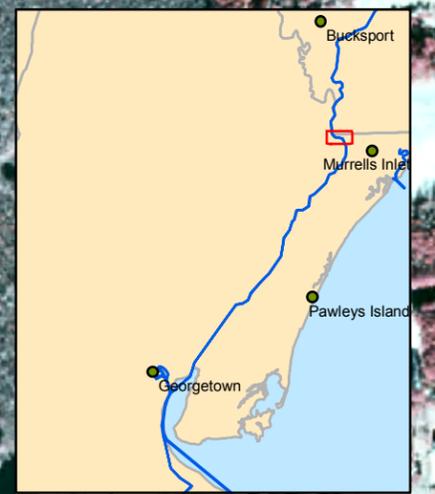

Notes:
 - Soundings are expressed in positive feet and tenths and are referenced to the Mean Lower Low Water (MLLW) datum
 - Project surveyed with USACE survey vessels equipped with GPS positioning and hydrographic survey equipment that meets USACE Navigation and Dredging standards for soft bottom hydrographic surveys.
 - Soundings are calibrated to tide gauges that are set to MLLW and referenced to published benchmarks
 - Horizontal Datum: State Plane NAD-83 SC-3900 Intl Feet
 - Project was designed by the Charleston District of the U.S. Army Corps of Engineers. The initials or signatures and registration designations of individuals appear on these project documents within the scope of their employment by ER 1110-1-8152
 - Maps and associated information represents the result of surveys made on the date indicated and can only be considered as indicating the general condition existing at that time. These conditions are subject to rapid change due to shoaling events. A prudent mariner should not rely exclusively on the information provided here
 - Aids to Navigation obtained from the U.S. Coast Guard Light List

— Channel Toe
 - - - Channel Center

Depth Ft MLLW




- Over 16
- 14 - 16
- 12 - 14
- 10 - 12
- Less than 10



**US Army Corps
Of Engineers®
Charleston District**

Survey Area: Atlantic Intracoastal Waterway - Bucksport to Winyah Bay	
Survey Date:	11-2010
Survey Crew:	Morton, Wright, Foss
Survey File Name:	Waccamaw_Complete.xyz
Imagery/Background:	2006 DNR False IR DOQQ
Mapped By:	C. Brewer

AIWW B-W 9

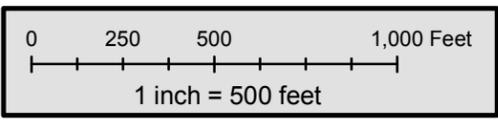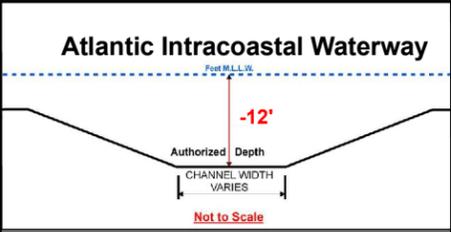

Notes:

- Soundings are expressed in positive feet and tenths and are referenced the Mean Lower Low Water (MLLW) datum
- Project surveyed with USACE survey vessels equipped with GPS positioning and hydrographic survey equipment that meets USACE Navigation and Dredging standards for soft bottom hydrographic surveys.
- Soundings are calibrated to tide gauges that are set to MLLW and referenced to published benchmarks
- Horizontal Datum: State Plane NAD-83 SC-3900 Intl Feet
- Project was designed by the Charleston District of the U.S. Army Corps of Engineers. The initials or signatures and registration designations of individuals appear on these project documents within the scope of their employment by ER 1110-1-8152
- Maps and associated information represents the result of surveys made on the date indicated and can only be considered as indicating the general condition existing at that time. These conditions are subject to rapid change due to shoaling events. A prudent mariner should not rely exclusively on the information provided here
- Aids to Navigation obtained from the U.S. Coast Guard Light List

— Channel Toe

- - - Channel Center




Depth Ft MLLW

- Over 16
- 14 - 16
- 12 - 14
- 10 - 12
- Less than 10





**US Army Corps
Of Engineers®
Charleston District**




Survey Area: Atlantic Intracoastal Waterway - Bucksport to Winyah Bay	
Survey Date:	11-2010
Survey Crew:	Morton, Wright, Foss
Survey File Name:	Waccamaw_Complete.xyz
Imagery/Background:	2006 DNR False IR DOQQ
Mapped By:	C. Brewer

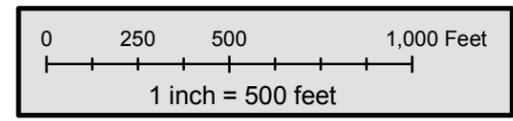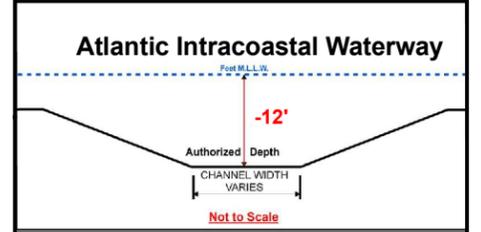



Notes:
 - Soundings are expressed in positive feet and tenths and are referenced to the Mean Lower Low Water (MLLW) datum
 - Project surveyed with USACE survey vessels equipped with GPS positioning and hydrographic survey equipment that meets USACE Navigation and Dredging standards for soft bottom hydrographic surveys.
 - Soundings are calibrated to tide gauges that are set to MLLW and referenced to published benchmarks
 - Horizontal Datum: State Plane NAD-83 SC-3900 Intl Feet
 - Project was designed by the Charleston District of the U.S. Army Corps of Engineers. The initials or signatures and registration designations of individuals appear on these project documents within the scope of their employment by ER 1110-1-8152
 - Maps and associated information represents the result of surveys made on the date indicated and can only be considered as indicating the general condition existing at that time. These conditions are subject to rapid change due to shoaling events. A prudent mariner should not rely exclusively on the information provided here
 - Aids to Navigation obtained from the U.S. Coast Guard Light List

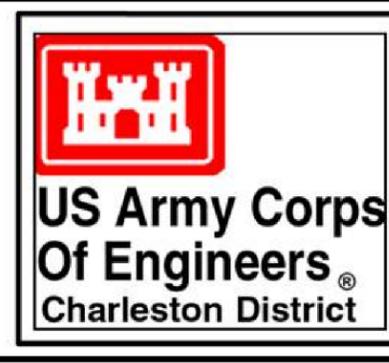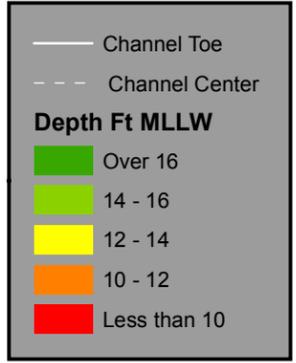

Survey Area: Atlantic Intracoastal Waterway - Bucksport to Winyah Bay	
Survey Date:	11-2010
Survey Crew:	Morton, Wright, Foss
Survey File Name:	Waccamaw_Complete.xyz
Imagery/Background:	2006 DNR False IR DOQQ
Mapped By:	C. Brewer


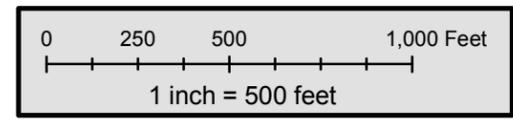
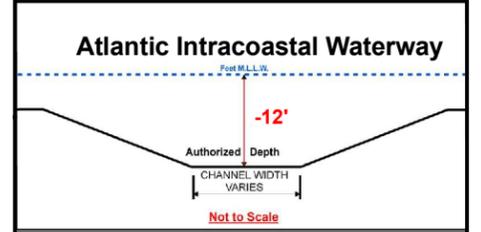


Notes:
 - Soundings are expressed in positive feet and tenths and are referenced the Mean Lower Low Water (MLLW) datum
 - Project surveyed with USACE survey vessels equipped with GPS positioning and hydrographic survey equipment that meets USACE Navigation and Dredging standards for soft bottom hydrographic surveys.
 - Soundings are calibrated to tide gauges that are set to MLLW and referenced to published benchmarks
 - Horizontal Datum: State Plane NAD-83 SC-3900 Intl Feet
 - Project was designed by the Charleston District of the U.S. Army Corps of Engineers. The initials or signatures and registration designations of individuals appear on these project documents within the scope of their employment by ER 1110-1-8152
 - Maps and associated information represents the result of surveys made on the date indicated and can only be considered as indicating the general condition existing at that time. These conditions are subject to rapid change due to shoaling events. A prudent mariner should not rely exclusively on the information provided here
 - Aids to Navigation obtained from the U.S. Coast Guard Light List

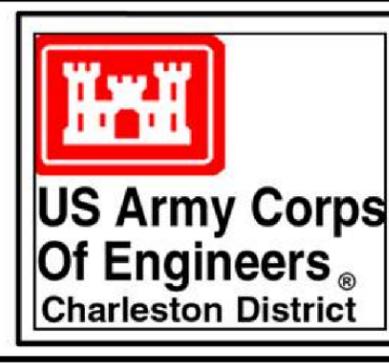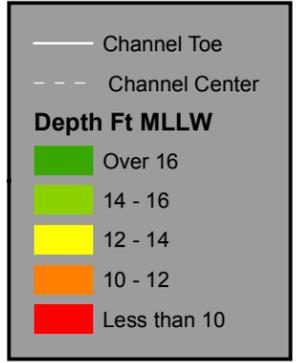


Survey Area: Atlantic Intracoastal Waterway - Bucksport to Winyah Bay	
Survey Date:	11-2010
Survey Crew:	Morton, Wright, Foss
Survey File Name:	Waccamaw_Complete.xyz
Imagery/Background:	2006 DNR False IR DOQQ
Mapped By:	C. Brewer

AIWW B-W 12

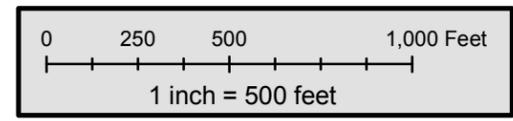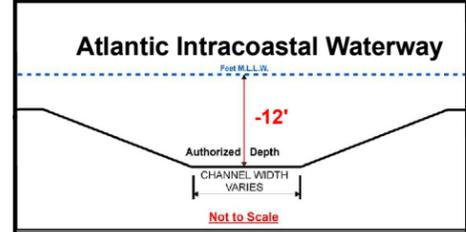

Notes:




- Soundings are expressed in positive feet and tenths and are referenced the Mean Lower Low Water (MLLW) datum
- Project surveyed with USACE survey vessels equipped with GPS positioning and hydrographic survey equipment that meets USACE Navigation and Dredging standards for soft bottom hydrographic surveys.
- Soundings are calibrated to tide gauges that are set to MLLW and referenced to published benchmarks
- Horizontal Datum: State Plane NAD-83 SC-3900 Intl Feet
- Project was designed by the Charleston District of the U.S. Army Corps of Engineers. The initials or signatures and registration designations of individuals appear on these project documents within the scope of their employment by ER 1110-1-8152
- Maps and associated information represents the result of surveys made on the date indicated and can only be considered as indicating the general condition existing at that time. These conditions are subject to rapid change due to shoaling events. A prudent mariner should not rely exclusively on the information provided here
- Aids to Navigation obtained from the U.S. Coast Guard Light List

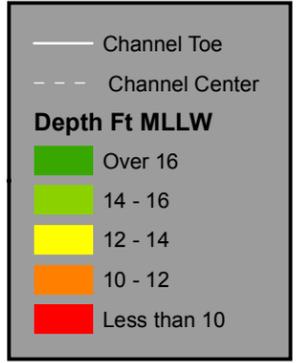




**US Army Corps
Of Engineers®
Charleston District**

Survey Area: Atlantic Intracoastal Waterway - Bucksport to Winyah Bay	
Survey Date:	11-2010
Survey Crew:	Morton, Wright, Foss
Survey File Name:	Waccamaw_Complete.xyz
Imagery/Background:	2006 DNR False IR DOQQ
Mapped By:	C. Brewer

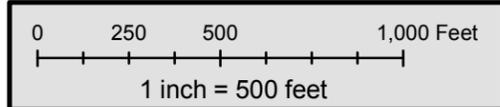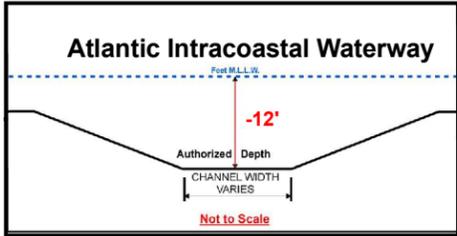

Notes:




- Soundings are expressed in positive feet and tenths and are referenced the Mean Lower Low Water (MLLW) datum
- Project surveyed with USACE survey vessels equipped with GPS positioning and hydrographic survey equipment that meets USACE Navigation and Dredging standards for soft bottom hydrographic surveys.
- Soundings are calibrated to tide gauges that are set to MLLW and referenced to published benchmarks
- Horizontal Datum: State Plane NAD-83 SC-3900 Intl Feet
- Project was designed by the Charleston District of the U.S. Army Corps of Engineers. The initials or signatures and registration designations of individuals appear on these project documents within the scope of their employment by ER 1110-1-8152
- Maps and associated information represents the result of surveys made on the date indicated and can only be considered as indicating the general condition existing at that time. These conditions are subject to rapid change due to shoaling events. A prudent mariner should not rely exclusively on the information provided here
- Aids to Navigation obtained from the U.S. Coast Guard Light List

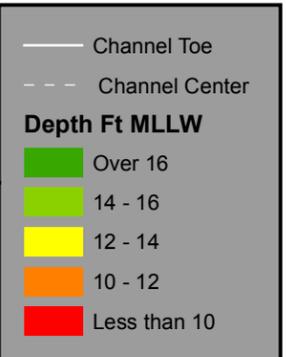



Survey Area: Atlantic Intracoastal Waterway - Bucksport to Winyah Bay	
Survey Date:	11-2010
Survey Crew:	Morton, Wright, Foss
Survey File Name:	Waccamaw_Complete.xyz
Imagery/Background:	2006 DNR False IR DOQQ
Mapped By:	C. Brewer

AIWW B-W 14

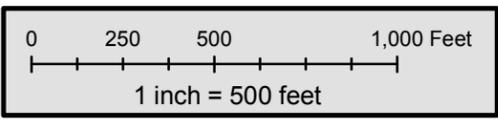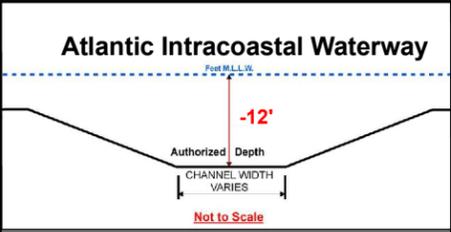

Notes:

- Soundings are expressed in positive feet and tenths and are referenced the Mean Lower Low Water (MLLW) datum
- Project surveyed with USACE survey vessels equipped with GPS positioning and hydrographic survey equipment that meets USACE Navigation and Dredging standards for soft bottom hydrographic surveys.
- Soundings are calibrated to tide gauges that are set to MLLW and referenced to published benchmarks
- Horizontal Datum: State Plane NAD-83 SC-3900 Intl Feet
- Project was designed by the Charleston District of the U.S. Army Corps of Engineers. The initials or signatures and registration designations of individuals appear on these project documents within the scope of their employment by ER 1110-1-8152
- Maps and associated information represents the result of surveys made on the date indicated and can only be considered as indicating the general condition existing at that time. These conditions are subject to rapid change due to shoaling events. A prudent mariner should not rely exclusively on the information provided here
- Aids to Navigation obtained from the U.S. Coast Guard Light List

— Channel Toe
 - - - Channel Center




Depth Ft MLLW

- Over 16
- 14 - 16
- 12 - 14
- 10 - 12
- Less than 10




Survey Area: Atlantic Intracoastal Waterway - Bucksport to Winyah Bay	
Survey Date:	11-2010
Survey Crew:	Morton, Wright, Foss
Survey File Name:	Waccamaw_Complete.xyz
Imagery/Background:	2006 DNR False IR DOQQ
Mapped By:	C. Brewer

AIWW B-W 15

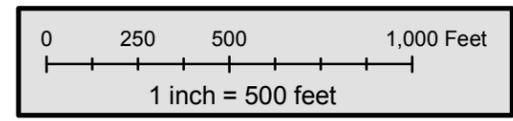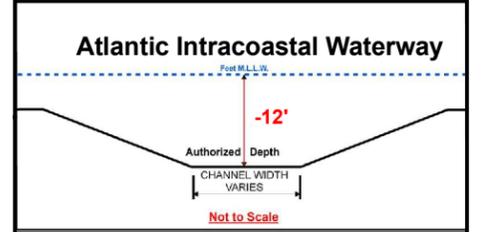




Notes:

- Soundings are expressed in positive feet and tenths and are referenced the Mean Lower Low Water (MLLW) datum
- Project surveyed with USACE survey vessels equipped with GPS positioning and hydrographic survey equipment that meets USACE Navigation and Dredging standards for soft bottom hydrographic surveys.
- Soundings are calibrated to tide gauges that are set to MLLW and referenced to published benchmarks
- Horizontal Datum: State Plane NAD-83 SC-3900 Intl Feet
- Project was designed by the Charleston District of the U.S. Army Corps of Engineers. The initials or signatures and registration designations of individuals appear on these project documents within the scope of their employment by ER 1110-1-8152
- Maps and associated information represents the result of surveys made on the date indicated and can only be considered as indicating the general condition existing at that time. These conditions are subject to rapid change due to shoaling events. A prudent mariner should not rely exclusively on the information provided here
- Aids to Navigation obtained from the U.S. Coast Guard Light List


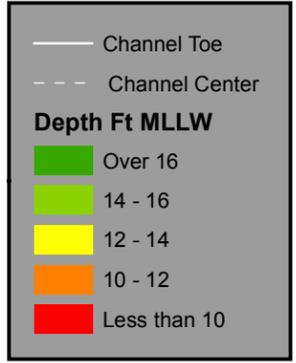


Survey Area: Atlantic Intracoastal Waterway - Bucksport to Winyah Bay	
Survey Date:	11-2010
Survey Crew:	Morton, Wright, Foss
Survey File Name:	Waccamaw_Complete.xyz
Imagery/Background:	2006 DNR False IR DOQQ
Mapped By:	C. Brewer




AIWW B-W 16

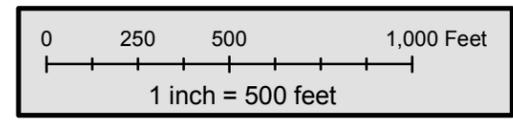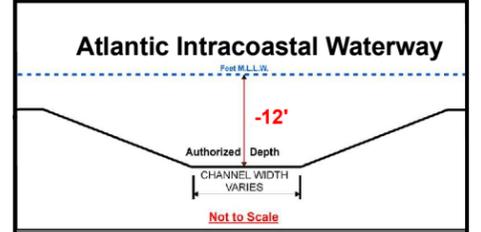



Notes:
 - Soundings are expressed in positive feet and tenths and are referenced to the Mean Lower Low Water (MLLW) datum
 - Project surveyed with USACE survey vessels equipped with GPS positioning and hydrographic survey equipment that meets USACE Navigation and Dredging standards for soft bottom hydrographic surveys.
 - Soundings are calibrated to tide gauges that are set to MLLW and referenced to published benchmarks
 - Horizontal Datum: State Plane NAD-83 SC-3900 Intl Feet
 - Project was designed by the Charleston District of the U.S. Army Corps of Engineers. The initials or signatures and registration designations of individuals appear on these project documents within the scope of their employment by ER 1110-1-8152
 - Maps and associated information represents the result of surveys made on the date indicated and can only be considered as indicating the general condition existing at that time. These conditions are subject to rapid change due to shoaling events. A prudent mariner should not rely exclusively on the information provided here
 - Aids to Navigation obtained from the U.S. Coast Guard Light List

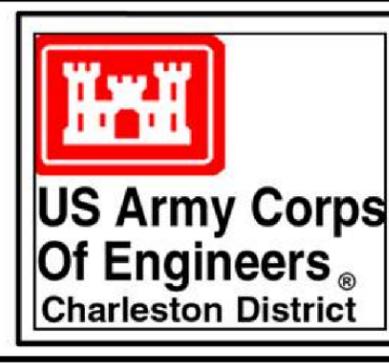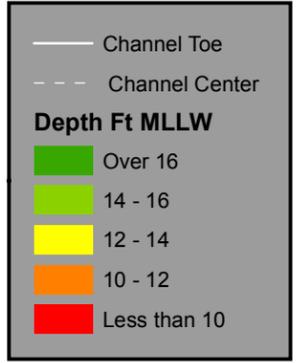




Survey Area: Atlantic Intracoastal Waterway - Bucksport to Winyah Bay	
Survey Date:	11-2010
Survey Crew:	Morton, Wright, Foss
Survey File Name:	Waccamaw_Complete.xyz
Imagery/Background:	2006 DNR False IR DOQQ
Mapped By:	C. Brewer

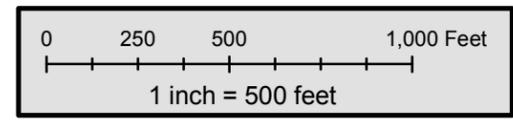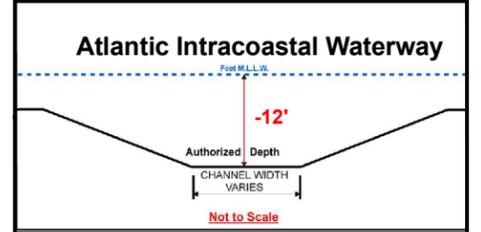


Notes:
 - Soundings are expressed in positive feet and tenths and are referenced the Mean Lower Low Water (MLLW) datum
 - Project surveyed with USACE survey vessels equipped with GPS positioning and hydrographic survey equipment that meets USACE Navigation and Dredging standards for soft bottom hydrographic surveys.
 - Soundings are calibrated to tide gauges that are set to MLLW and referenced to published benchmarks
 - Horizontal Datum: State Plane NAD-83 SC-3900 Intl Feet
 - Project was designed by the Charleston District of the U.S. Army Corps of Engineers. The initials or signatures and registration designations of individuals appear on these project documents within the scope of their employment by ER 1110-1-8152
 - Maps and associated information represents the result of surveys made on the date indicated and can only be considered as indicating the general condition existing at that time. These conditions are subject to rapid change due to shoaling events. A prudent mariner should not rely exclusively on the information provided here
 - Aids to Navigation obtained from the U.S. Coast Guard Light List

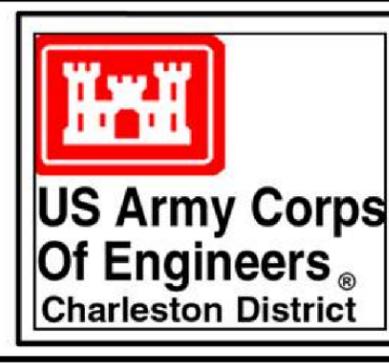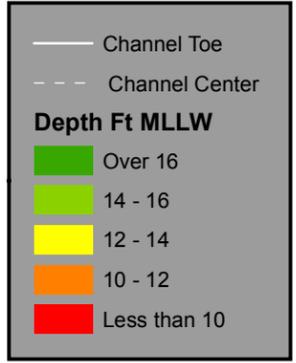





Survey Area: Atlantic Intracoastal Waterway - Bucksport to Winyah Bay	
Survey Date:	11-2010
Survey Crew:	Morton, Wright, Foss
Survey File Name:	Waccamaw_Complete.xyz
Imagery/Background:	2006 DNR False IR DOQQ
Mapped By:	C. Brewer

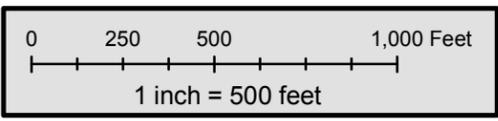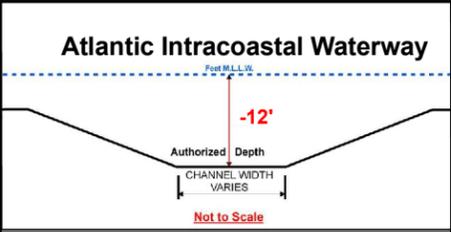


Notes:
 - Soundings are expressed in positive feet and tenths and are referenced the Mean Lower Low Water (MLLW) datum
 - Project surveyed with USACE survey vessels equipped with GPS positioning and hydrographic survey equipment that meets USACE Navigation and Dredging standards for soft bottom hydrographic surveys.
 - Soundings are calibrated to tide gauges that are set to MLLW and referenced to published benchmarks
 - Horizontal Datum: State Plane NAD-83 SC-3900 Intl Feet
 - Project was designed by the Charleston District of the U.S. Army Corps of Engineers. The initials or signatures and registration designations of individuals appear on these project documents within the scope of their employment by ER 1110-1-8152
 - Maps and associated information represents the result of surveys made on the date indicated and can only be considered as indicating the general condition existing at that time. These conditions are subject to rapid change due to shoaling events. A prudent mariner should not rely exclusively on the information provided here
 - Aids to Navigation obtained from the U.S. Coast Guard Light List

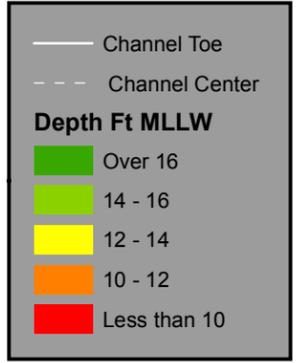

Survey Area: Atlantic Intracoastal Waterway - Bucksport to Winyah Bay	
Survey Date:	11-2010
Survey Crew:	Morton, Wright, Foss
Survey File Name:	Waccamaw_Complete.xyz
Imagery/Background:	2006 DNR False IR DOQQ
Mapped By:	C. Brewer

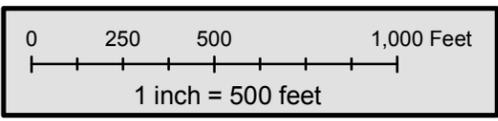
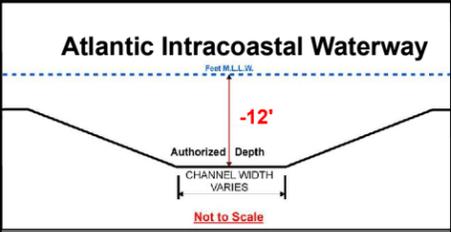
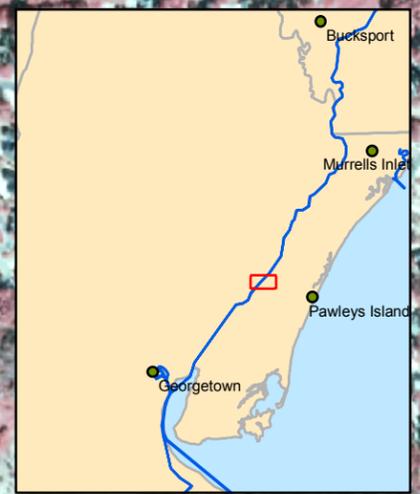


Notes:
 - Soundings are expressed in positive feet and tenths and are referenced the Mean Lower Low Water (MLLW) datum
 - Project surveyed with USACE survey vessels equipped with GPS positioning and hydrographic survey equipment that meets USACE Navigation and Dredging standards for soft bottom hydrographic surveys.
 - Soundings are calibrated to tide gauges that are set to MLLW and referenced to published benchmarks
 - Horizontal Datum: State Plane NAD-83 SC-3900 Intl Feet
 - Project was designed by the Charleston District of the U.S. Army Corps of Engineers. The initials or signatures and registration designations of individuals appear on these project documents within the scope of their employment by ER 1110-1-8152
 - Maps and associated information represents the result of surveys made on the date indicated and can only be considered as indicating the general condition existing at that time. These conditions are subject to rapid change due to shoaling events. A prudent mariner should not rely exclusively on the information provided here
 - Aids to Navigation obtained from the U.S. Coast Guard Light List

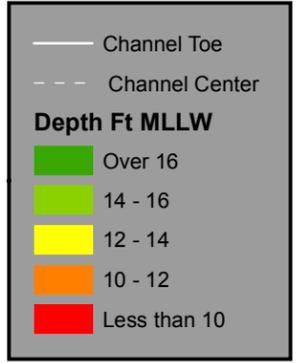

Survey Area: Atlantic Intracoastal Waterway - Bucksport to Winyah Bay	
Survey Date:	11-2010
Survey Crew:	Morton, Wright, Foss
Survey File Name:	Waccamaw_Complete.xyz
Imagery/Background:	2006 DNR False IR DOQQ
Mapped By:	C. Brewer

AIWW B-W 20

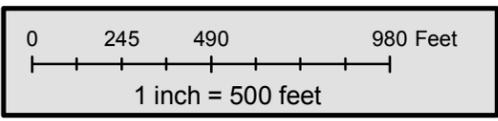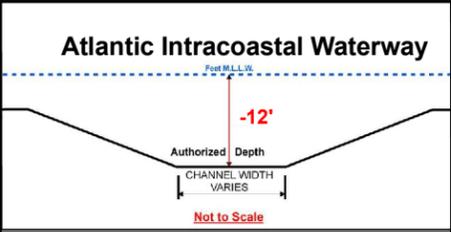

Notes:
 - Soundings are expressed in positive feet and tenths and are referenced the Mean Lower Low Water (MLLW) datum
 - Project surveyed with USACE survey vessels equipped with GPS positioning and hydrographic survey equipment that meets USACE Navigation and Dredging standards for soft bottom hydrographic surveys.
 - Soundings are calibrated to tide gauges that are set to MLLW and referenced to published benchmarks
 - Horizontal Datum: State Plane NAD-83 SC-3900 Intl Feet
 - Project was designed by the Charleston District of the U.S. Army Corps of Engineers. The initials or signatures and registration designations of individuals appear on these project documents within the scope of their employment by ER 1110-1-8152
 - Maps and associated information represents the result of surveys made on the date indicated and can only be considered as indicating the general condition existing at that time. These conditions are subject to rapid change due to shoaling events. A prudent mariner should not rely exclusively on the information provided here
 - Aids to Navigation obtained from the U.S. Coast Guard Light List

— Channel Toe
 - - - Channel Center

Depth Ft MLLW




- Over 16
- 14 - 16
- 12 - 14
- 10 - 12
- Less than 10




**US Army Corps
Of Engineers®
Charleston District**

Survey Area: Atlantic Intracoastal Waterway - Bucksport to Winyah Bay	
Survey Date:	11-2010
Survey Crew:	Morton, Wright, Foss
Survey File Name:	Waccamaw_Complete.xyz
Imagery/Background:	2006 DNR False IR DOQQ
Mapped By:	C. Brewer




AIWW B-W 21

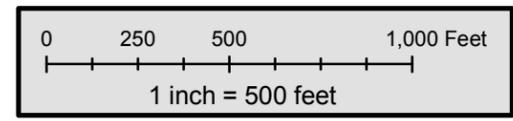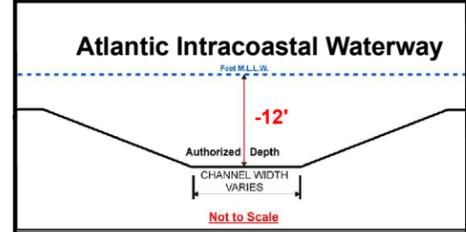


Notes:
 - Soundings are expressed in positive feet and tenths and are referenced to the Mean Lower Low Water (MLLW) datum
 - Project surveyed with USACE survey vessels equipped with GPS positioning and hydrographic survey equipment that meets USACE Navigation and Dredging standards for soft bottom hydrographic surveys.
 - Soundings are calibrated to tide gauges that are set to MLLW and referenced to published benchmarks
 - Horizontal Datum: State Plane NAD-83 SC-3900 Intl Feet
 - Project was designed by the Charleston District of the U.S. Army Corps of Engineers. The initials or signatures and registration designations of individuals appear on these project documents within the scope of their employment by ER 1110-1-8152
 - Maps and associated information represents the result of surveys made on the date indicated and can only be considered as indicating the general condition existing at that time. These conditions are subject to rapid change due to shoaling events. A prudent mariner should not rely exclusively on the information provided here
 - Aids to Navigation obtained from the U.S. Coast Guard Light List

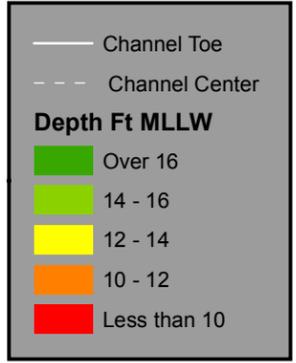

Survey Area: Atlantic Intracoastal Waterway - Bucksport to Winyah Bay	
Survey Date:	11-2010
Survey Crew:	Morton, Wright, Foss
Survey File Name:	Waccamaw_Complete.xyz
Imagery/Background:	2006 DNR False IR DOQQ
Mapped By:	C. Brewer


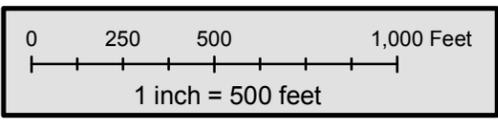
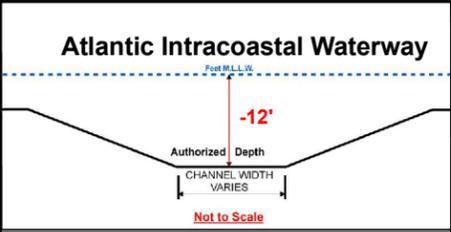


Notes:
 - Soundings are expressed in positive feet and tenths and are referenced the Mean Lower Low Water (MLLW) datum
 - Project surveyed with USACE survey vessels equipped with GPS positioning and hydrographic survey equipment that meets USACE Navigation and Dredging standards for soft bottom hydrographic surveys.
 - Soundings are calibrated to tide gauges that are set to MLLW and referenced to published benchmarks
 - Horizontal Datum: State Plane NAD-83 SC-3900 Intl Feet
 - Project was designed by the Charleston District of the U.S. Army Corps of Engineers. The initials or signatures and registration designations of individuals appear on these project documents within the scope of their employment by ER 1110-1-8152
 - Maps and associated information represents the result of surveys made on the date indicated and can only be considered as indicating the general condition existing at that time. These conditions are subject to rapid change due to shoaling events. A prudent mariner should not rely exclusively on the information provided here
 - Aids to Navigation obtained from the U.S. Coast Guard Light List

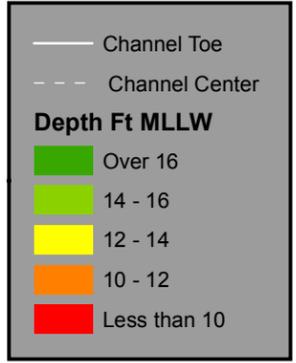


Survey Area: Atlantic Intracoastal Waterway - Bucksport to Winyah Bay	
Survey Date:	11-2010
Survey Crew:	Morton, Wright, Foss
Survey File Name:	Waccamaw_Complete.xyz
Imagery/Background:	2006 DNR False IR DOQQ
Mapped By:	C. Brewer





AIWW B-W 23

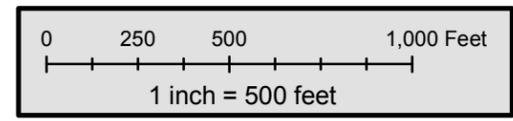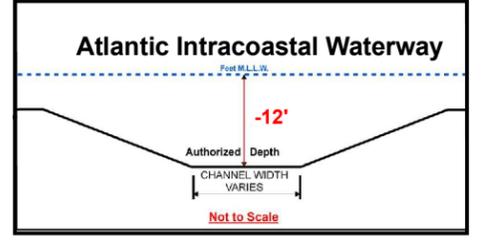

Notes:
 - Soundings are expressed in positive feet and tenths and are referenced the Mean Lower Low Water (MLLW) datum
 - Project surveyed with USACE survey vessels equipped with GPS positioning and hydrographic survey equipment that meets USACE Navigation and Dredging standards for soft bottom hydrographic surveys.
 - Soundings are calibrated to tide gauges that are set to MLLW and referenced to published benchmarks
 - Horizontal Datum: State Plane NAD-83 SC-3900 Intl Feet
 - Project was designed by the Charleston District of the U.S. Army Corps of Engineers. The initials or signatures and registration designations of individuals appear on these project documents within the scope of their employment by ER 1110-1-8152
 - Maps and associated information represents the result of surveys made on the date indicated and can only be considered as indicating the general condition existing at that time. These conditions are subject to rapid change due to shoaling events. A prudent mariner should not rely exclusively on the information provided here
 - Aids to Navigation obtained from the U.S. Coast Guard Light List

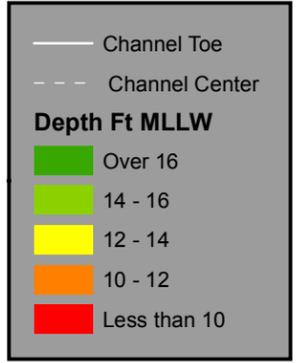


Survey Area: Atlantic Intracoastal Waterway - Bucksport to Winyah Bay	
Survey Date:	11-2010
Survey Crew:	Morton, Wright, Foss
Survey File Name:	Waccamaw_Complete.xyz
Imagery/Background:	2006 DNR False IR DOQQ
Mapped By:	C. Brewer

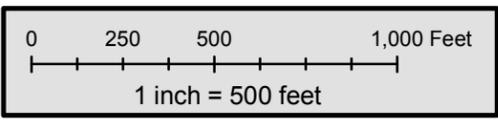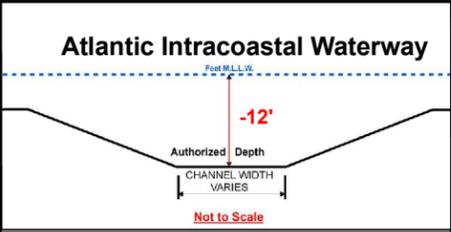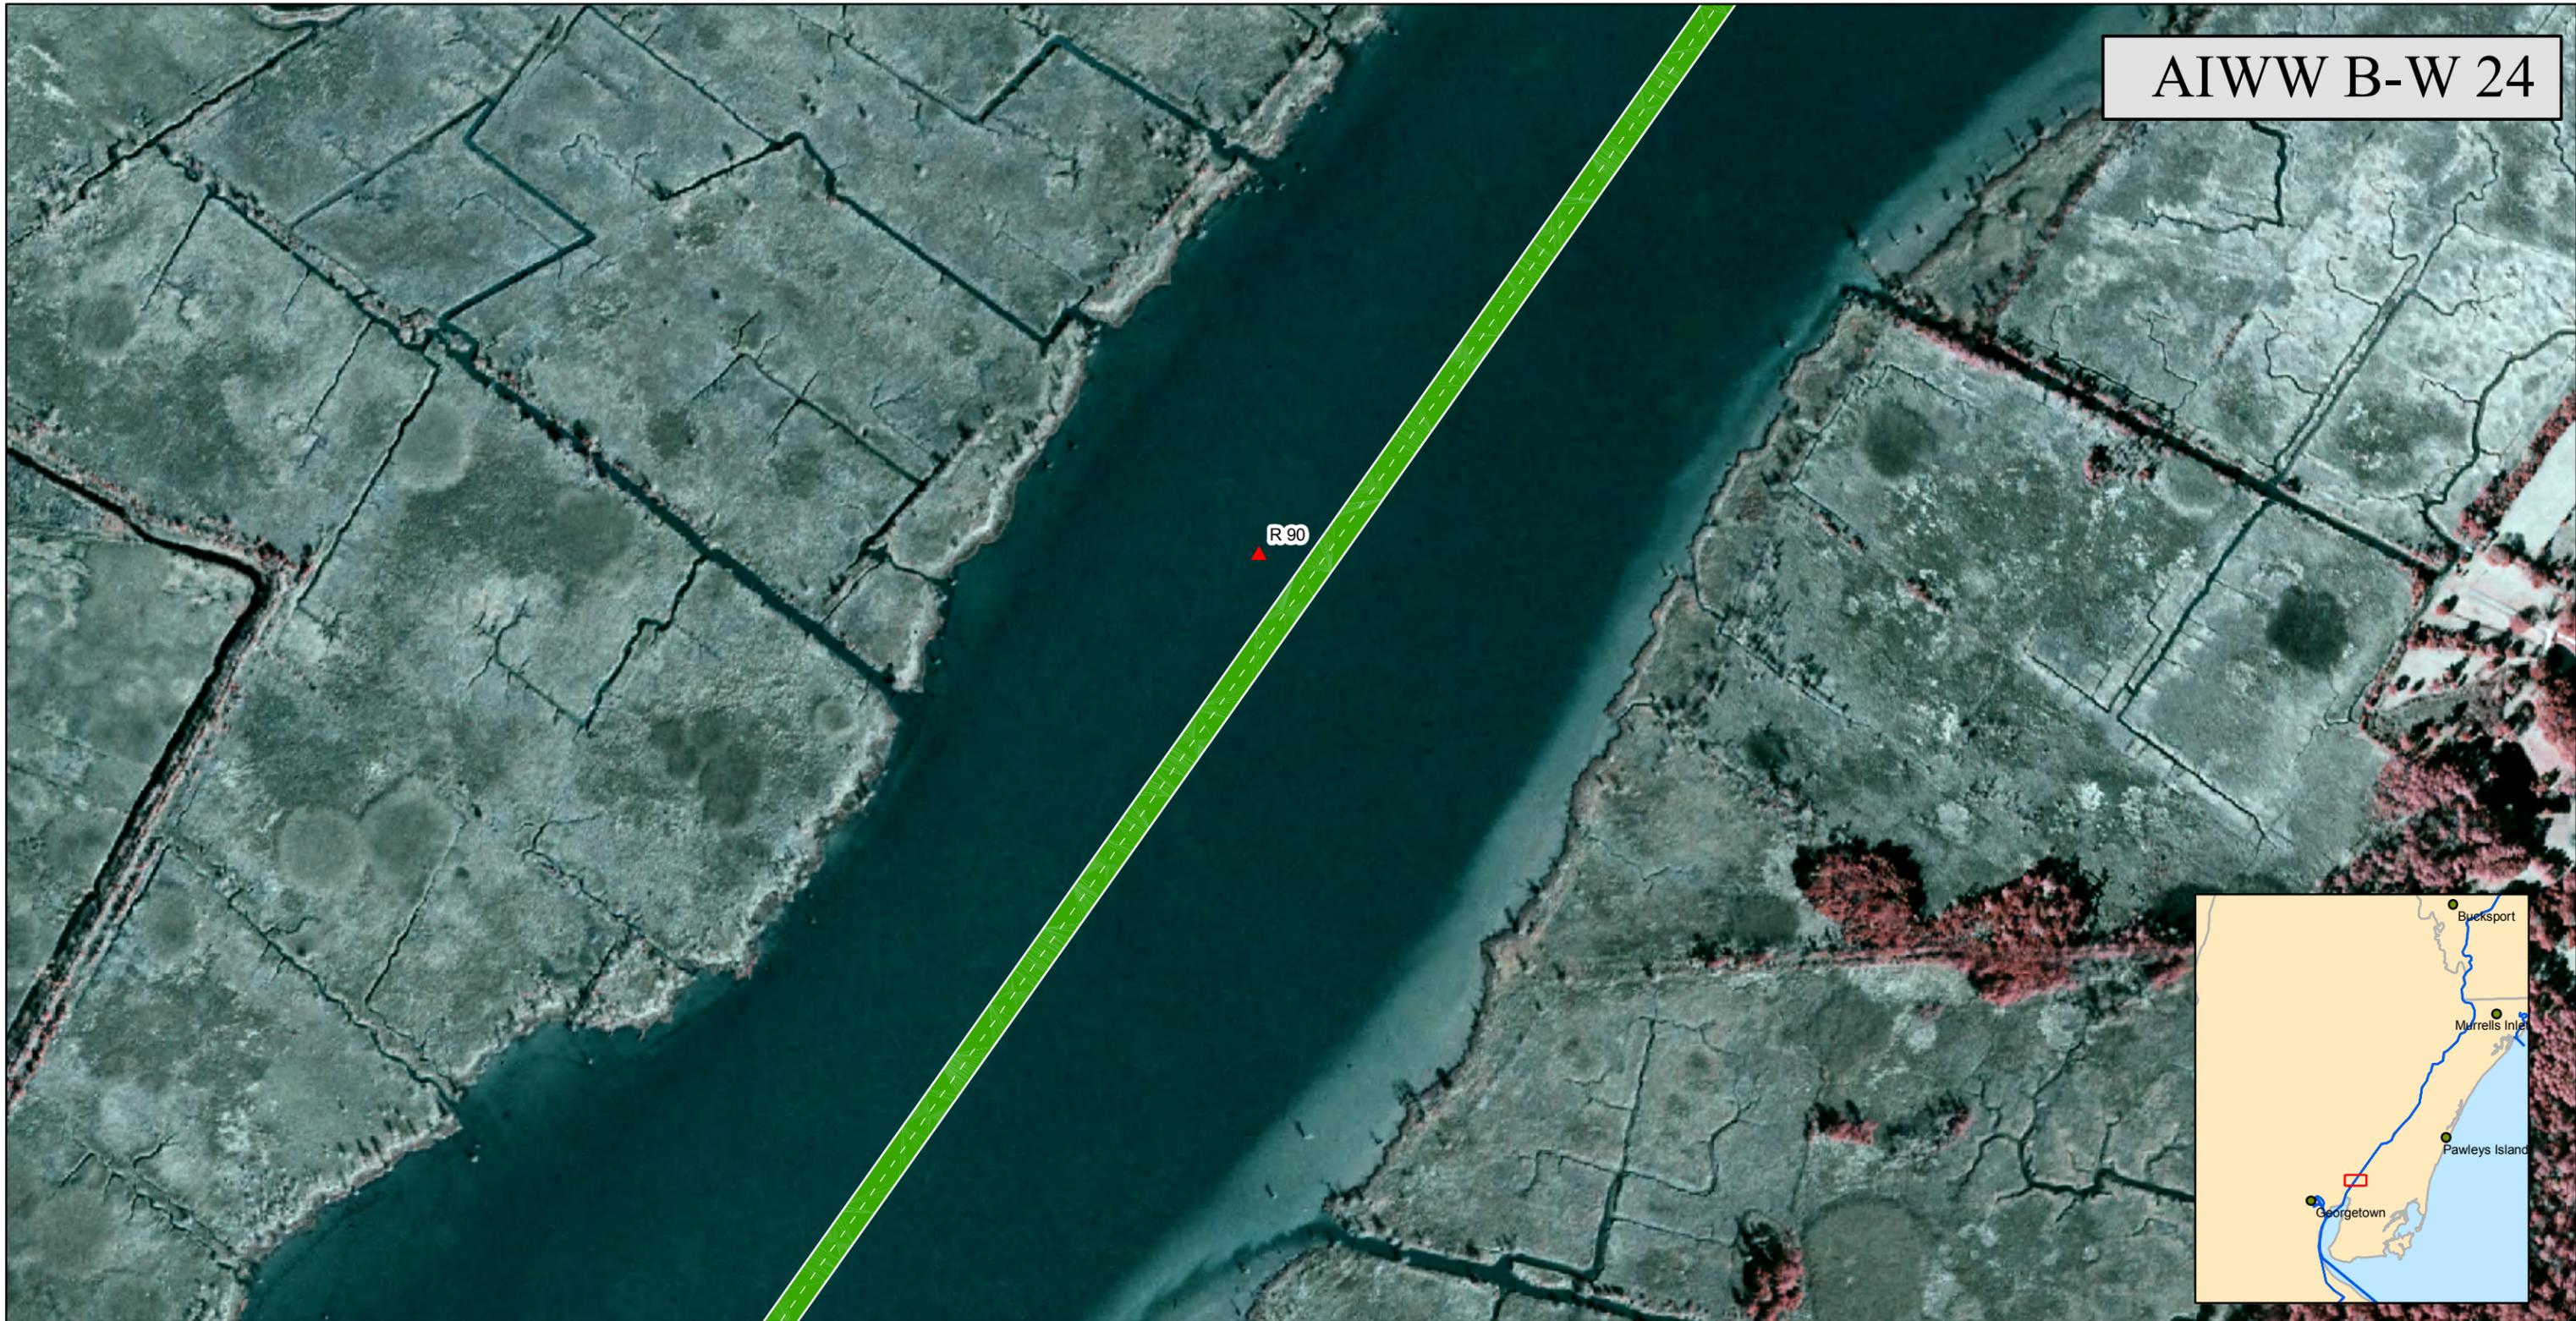





Notes:

- Soundings are expressed in positive feet and tenths and are referenced to the Mean Lower Low Water (MLLW) datum
- Project surveyed with USACE survey vessels equipped with GPS positioning and hydrographic survey equipment that meets USACE Navigation and Dredging standards for soft bottom hydrographic surveys.
- Soundings are calibrated to tide gauges that are set to MLLW and referenced to published benchmarks
- Horizontal Datum: State Plane NAD-83 SC-3900 Intl Feet
- Project was designed by the Charleston District of the U.S. Army Corps of Engineers. The initials or signatures and registration designations of individuals appear on these project documents within the scope of their employment by ER 1110-1-8152
- Maps and associated information represents the result of surveys made on the date indicated and can only be considered as indicating the general condition existing at that time. These conditions are subject to rapid change due to shoaling events. A prudent mariner should not rely exclusively on the information provided here
- Aids to Navigation obtained from the U.S. Coast Guard Light List

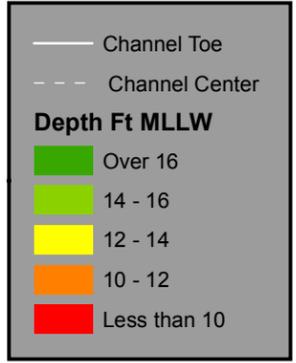







Survey Area: Atlantic Intracoastal Waterway - Bucksport to Winyah Bay	
Survey Date:	11-2010
Survey Crew:	Morton, Wright, Foss
Survey File Name:	Waccamaw_Complete.xyz
Imagery/Background:	2006 DNR False IR DOQQ
Mapped By:	C. Brewer

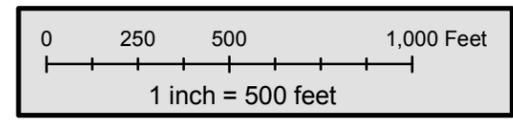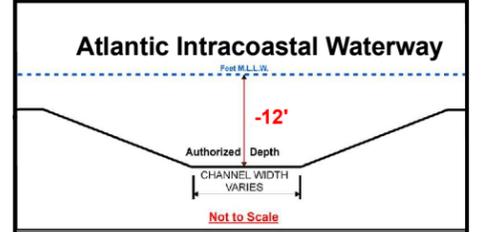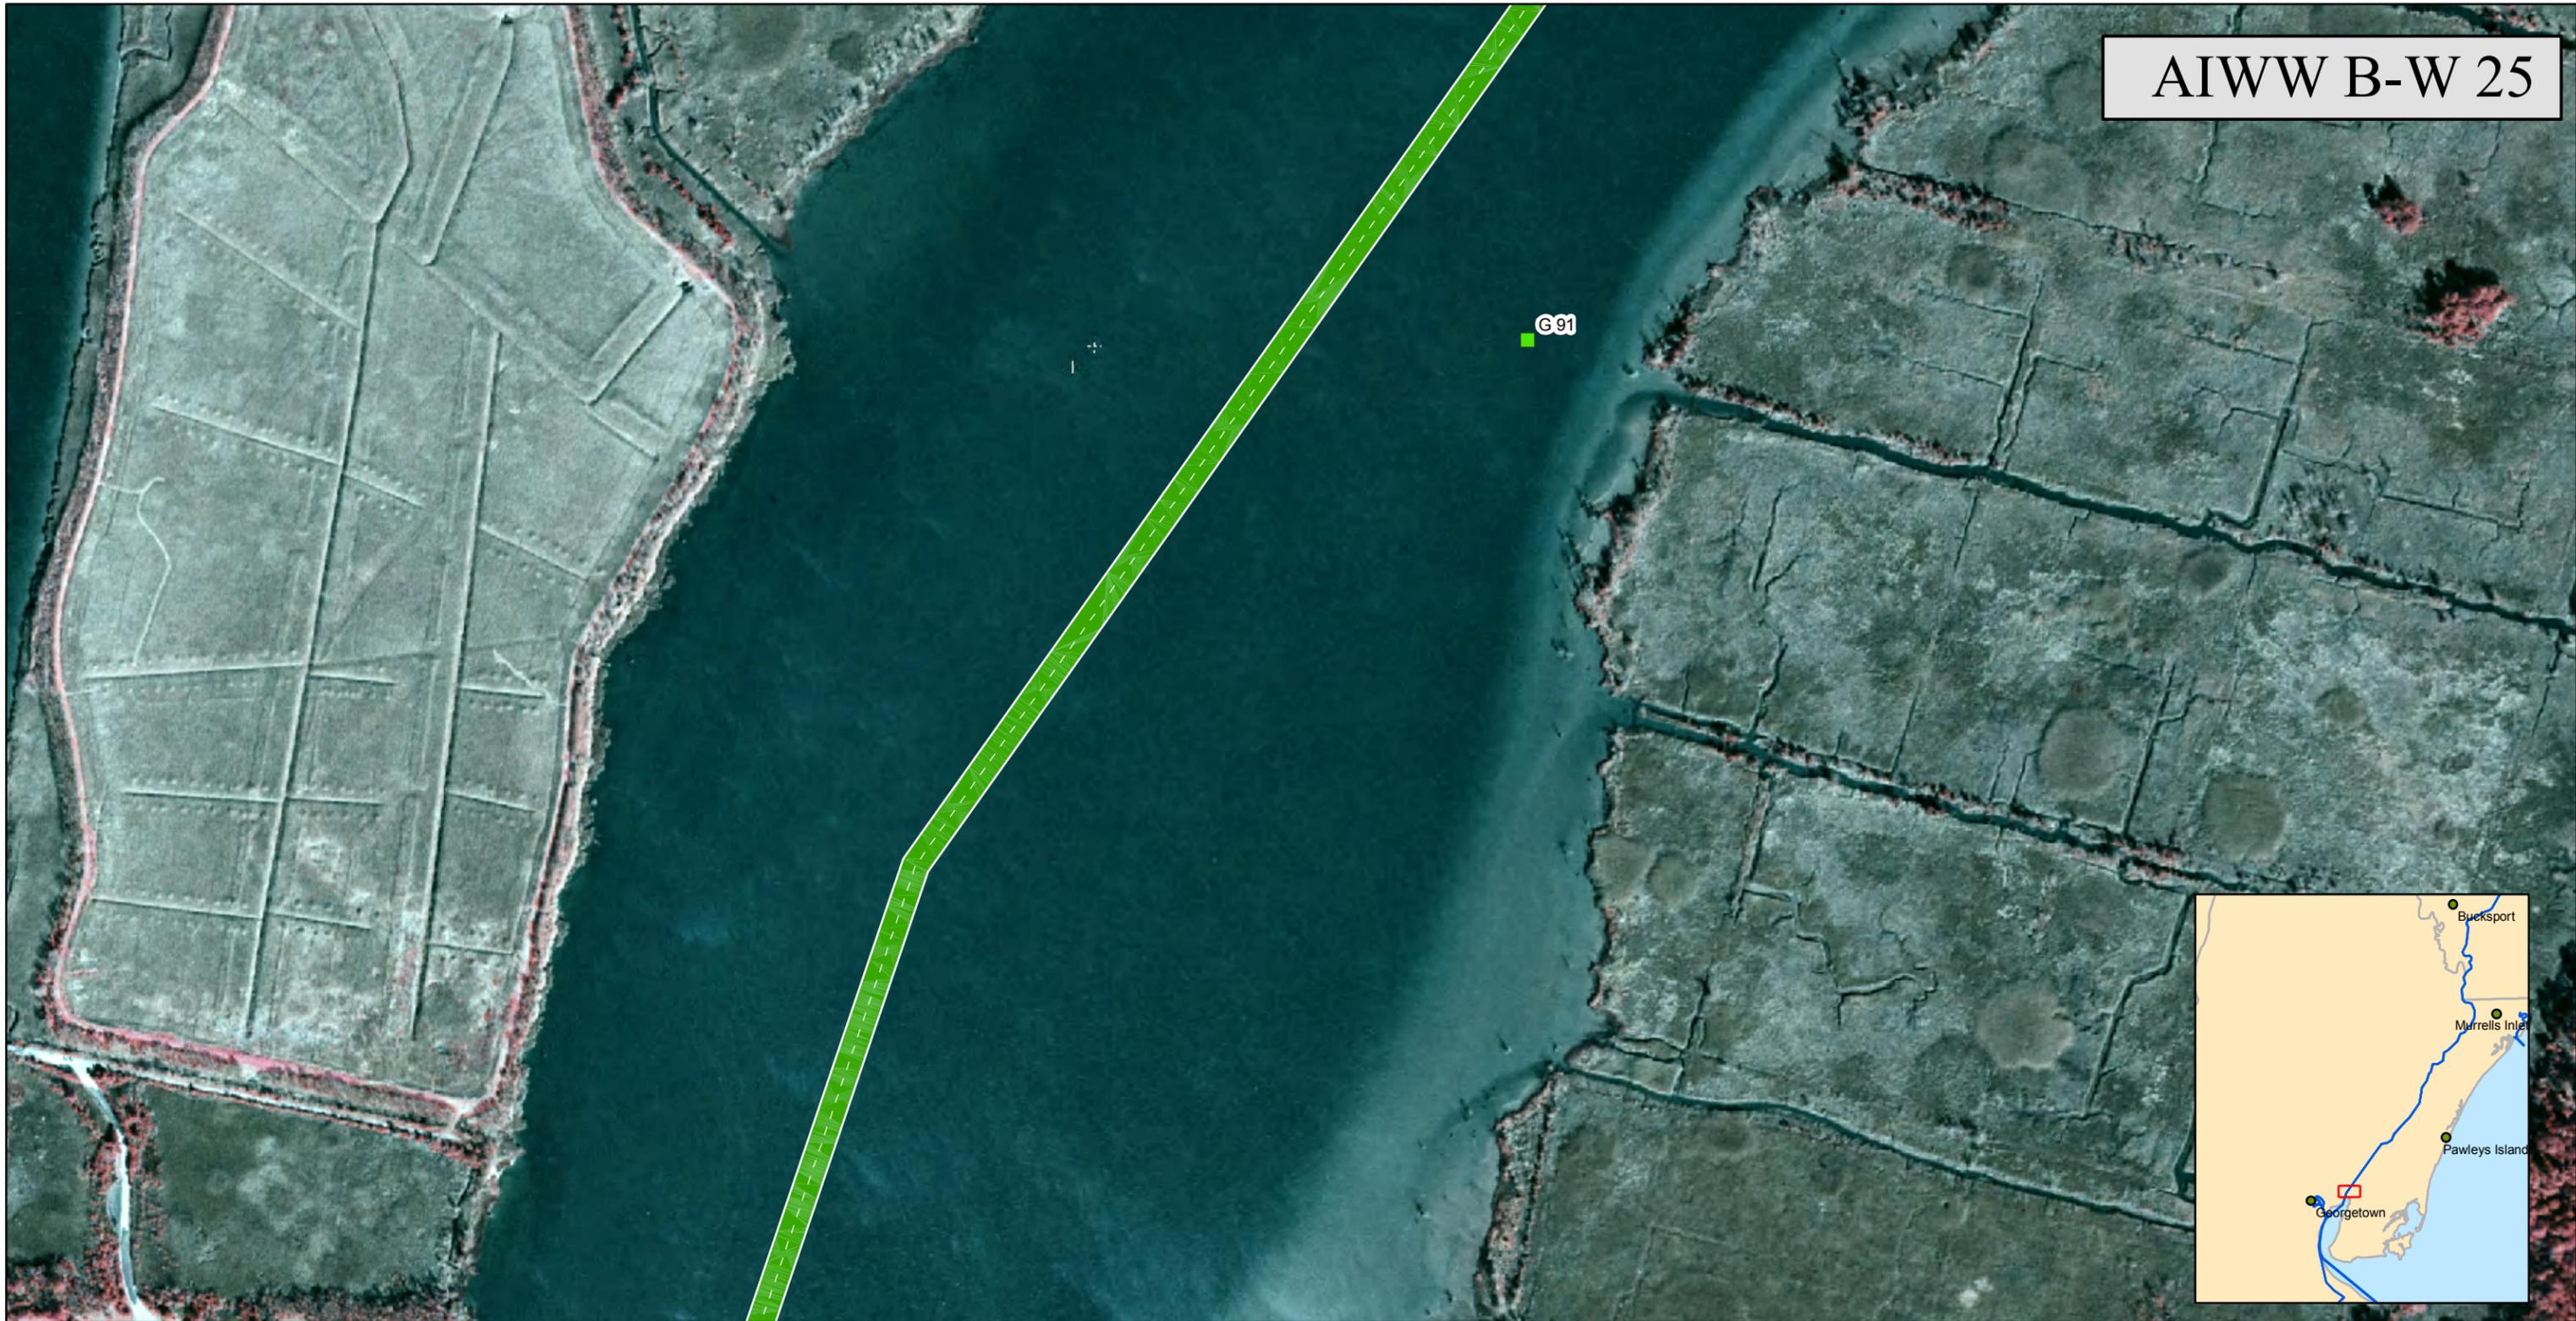


Notes:
 - Soundings are expressed in positive feet and tenths and are referenced the Mean Lower Low Water (MLLW) datum
 - Project surveyed with USACE survey vessels equipped with GPS positioning and hydrographic survey equipment that meets USACE Navigation and Dredging standards for soft bottom hydrographic surveys.
 - Soundings are calibrated to tide gauges that are set to MLLW and referenced to published benchmarks
 - Horizontal Datum: State Plane NAD-83 SC-3900 Intl Feet
 - Project was designed by the Charleston District of the U.S. Army Corps of Engineers. The initials or signatures and registration designations of individuals appear on these project documents within the scope of their employment by ER 1110-1-8152
 - Maps and associated information represents the result of surveys made on the date indicated and can only be considered as indicating the general condition existing at that time. These conditions are subject to rapid change due to shoaling events. A prudent mariner should not rely exclusively on the information provided here
 - Aids to Navigation obtained from the U.S. Coast Guard Light List

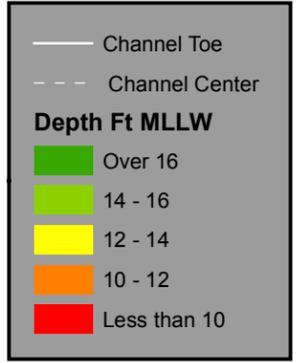




Survey Area: Atlantic Intracoastal Waterway - Bucksport to Winyah Bay	
Survey Date:	11-2010
Survey Crew:	Morton, Wright, Foss
Survey File Name:	Waccamaw_Complete.xyz
Imagery/Background:	2006 DNR False IR DOQQ
Mapped By:	C. Brewer

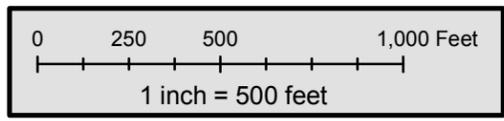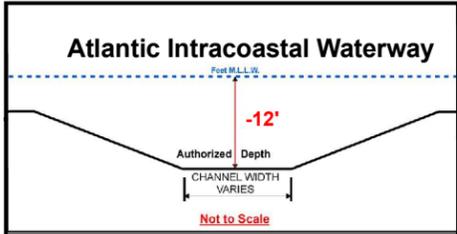

Notes:
 - Soundings are expressed in positive feet and tenths and are referenced the Mean Lower Low Water (MLLW) datum
 - Project surveyed with USACE survey vessels equipped with GPS positioning and hydrographic survey equipment that meets USACE Navigation and Dredging standards for soft bottom hydrographic surveys.
 - Soundings are calibrated to tide gauges that are set to MLLW and referenced to published benchmarks
 - Horizontal Datum: State Plane NAD-83 SC-3900 Intl Feet
 - Project was designed by the Charleston District of the U.S. Army Corps of Engineers. The initials or signatures and registration designations of individuals appear on these project documents within the scope of their employment by ER 1110-1-8152
 - Maps and associated information represents the result of surveys made on the date indicated and can only be considered as indicating the general condition existing at that time. These conditions are subject to rapid change due to shoaling events. A prudent mariner should not rely exclusively on the information provided here
 - Aids to Navigation obtained from the U.S. Coast Guard Light List

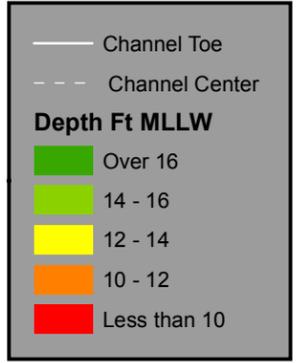


Survey Area: Atlantic Intracoastal Waterway - Bucksport to Winyah Bay	
Survey Date:	11-2010
Survey Crew:	Morton, Wright, Foss
Survey File Name:	Waccamaw_Complete.xyz
Imagery/Background:	2006 DNR False IR DOQQ
Mapped By:	C. Brewer

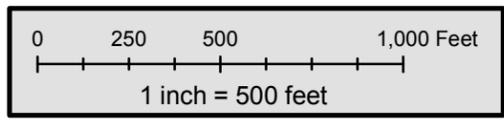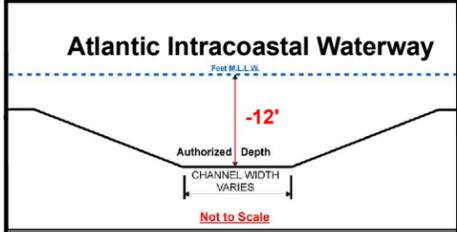

Notes:

- Soundings are expressed in positive feet and tenths and are referenced to the Mean Lower Low Water (MLLW) datum
- Project surveyed with USACE survey vessels equipped with GPS positioning and hydrographic survey equipment that meets USACE Navigation and Dredging standards for soft bottom hydrographic surveys.
- Soundings are calibrated to tide gauges that are set to MLLW and referenced to published benchmarks
- Horizontal Datum: State Plane NAD-83 SC-3900 Intl Feet
- Project was designed by the Charleston District of the U.S. Army Corps of Engineers. The initials or signatures and registration designations of individuals appear on these project documents within the scope of their employment by ER 1110-1-8152
- Maps and associated information represents the result of surveys made on the date indicated and can only be considered as indicating the general condition existing at that time. These conditions are subject to rapid change due to shoaling events. A prudent mariner should not rely exclusively on the information provided here
- Aids to Navigation obtained from the U.S. Coast Guard Light List

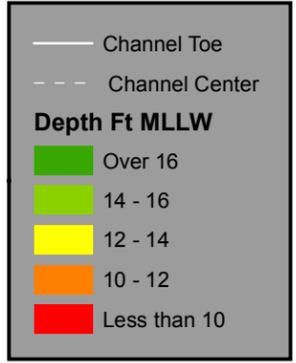



Survey Area: Atlantic Intracoastal Waterway - Bucksport to Winyah Bay	
Survey Date:	11-2010
Survey Crew:	Morton, Wright, Foss
Survey File Name:	Waccamaw_Complete.xyz
Imagery/Background:	2006 DNR False IR DOQQ
Mapped By:	C. Brewer