

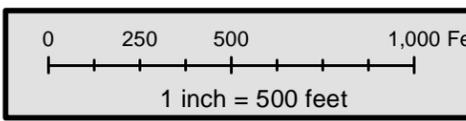


# AIWW W-C 1

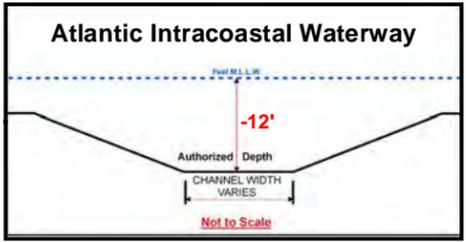

Notes:  
 - Soundings are expressed in positive feet and tenths and are referenced the Mean Lower Low Water (MLLW) datum  
 - Project surveyed with USACE survey vessels equipped with GPS positioning and hydrographic survey equipment that meets USACE Navigation and Dredging standards for soft bottom hydrographic surveys.  
 - Soundings are calibrated to tide gauges that are set to MLLW and referenced to published benchmarks  
 - Horizontal Datum: State Plane NAD-83 SC-3900 Intl Feet  
 - Project was designed by the Charleston District of the U.S. Army Corps of Engineers. The initials or signatures and registration designations of individuals appear on these project documents within the scope of their employment by ER 1110-1-8152  
 - Maps and associated information represents the result of surveys made on the date indicated and can only be considered as indicating the general condition existing at that time. These conditions are subject to rapid change due to shoaling events. A prudent mariner should not rely exclusively on the information provided here  
 - Aids to Navigation obtained from the U.S. Coast Guard Light List

	Federal Channel
<b>Depth FT MLLW</b>	
	-0.6 - 6
	6.1 - 8
	8.1 - 10
	10.1 - 12
	12.1 - 30

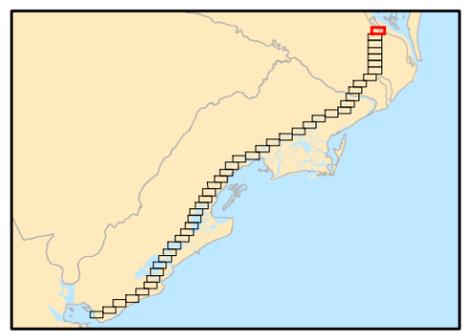



<b>Survey Area:</b> Atlantic Intracoastal Waterway - Winyah Bay to Charleston	
<b>Survey Date:</b>	2013-09
<b>Survey Crew:</b>	USACE Survey Team
<b>Survey File Name:</b>	20130900_ICW_WBC_MB_CS_ALL.xyz
<b>Imagery/Background:</b>	2011 NRCS NAIP
<b>Mapped By:</b>	

# AIWW W-C 2

South Island Ferry




USDA, FSA, APFO

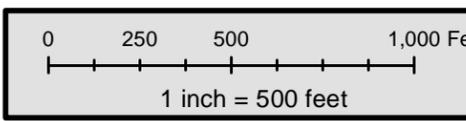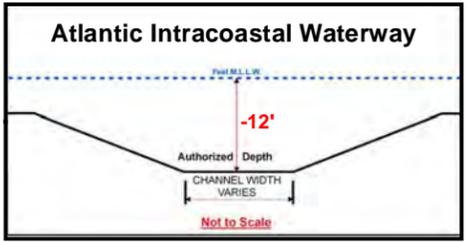

Notes:  
 - Soundings are expressed in positive feet and tenths and are referenced the Mean Lower Low Water (MLLW) datum  
 - Project surveyed with USACE survey vessels equipped with GPS positioning and hydrographic survey equipment that meets USACE Navigation and Dredging standards for soft bottom hydrographic surveys.  
 - Soundings are calibrated to tide gauges that are set to MLLW and referenced to published benchmarks  
 - Horizontal Datum: State Plane NAD-83 SC-3900 Intl Feet  
 - Project was designed by the Charleston District of the U.S. Army Corps of Engineers. The initials or signatures and registration designations of individuals appear on these project documents within the scope of their employment by ER 1110-1-8152  
 - Maps and associated information represents the result of surveys made on the date indicated and can only be considered as indicating the general condition existing at that time. These conditions are subject to rapid change due to shoaling events. A prudent mariner should not rely exclusively on the information provided here  
 - Aids to Navigation obtained from the U.S. Coast Guard Light List

Federal Channel	
Depth FT MLLW	
<span style="display:inline-block; width:15px; height:15px; background-color:red;"></span>	-0.6 - 6
<span style="display:inline-block; width:15px; height:15px; background-color:orange;"></span>	6.1 - 8
<span style="display:inline-block; width:15px; height:15px; background-color:yellow;"></span>	8.1 - 10
<span style="display:inline-block; width:15px; height:15px; background-color:lightgreen;"></span>	10.1 - 12
<span style="display:inline-block; width:15px; height:15px; background-color:blue;"></span>	12.1 - 30


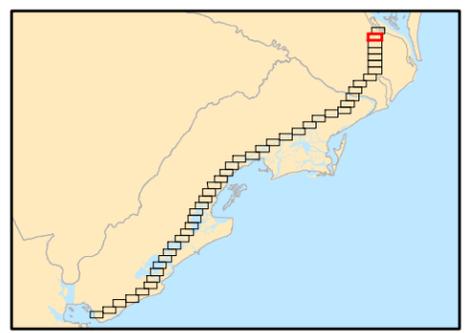


Survey Area: Atlantic Intracoastal Waterway - Winyah Bay to Charleston	
Survey Date:	2013-09
Survey Crew:	USACE Survey Team
Survey File Name:	20130900_ICW_WBC_MB_CS_ALL.xyz
Imagery/Background:	2011 NRCS NAIP
Mapped By:	

# AIWW W-C 3




USDA, FSA, APFO

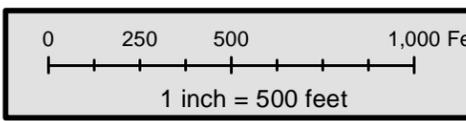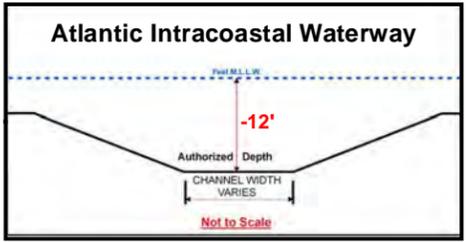

Notes:


- Soundings are expressed in positive feet and tenths and are referenced the Mean Lower Low Water (MLLW) datum
- Project surveyed with USACE survey vessels equipped with GPS positioning and hydrographic survey equipment that meets USACE Navigation and Dredging standards for soft bottom hydrographic surveys.
- Soundings are calibrated to tide gauges that are set to MLLW and referenced to published benchmarks
- Horizontal Datum: State Plane NAD-83 SC-3900 Intl Feet
- Project was designed by the Charleston District of the U.S. Army Corps of Engineers. The initials or signatures and registration designations of individuals appear on these project documents within the scope of their employment by ER 1110-1-8152
- Maps and associated information represents the result of surveys made on the date indicated and can only be considered as indicating the general condition existing at that time. These conditions are subject to rapid change due to shoaling events. A prudent mariner should not rely exclusively on the information provided here
- Aids to Navigation obtained from the U.S. Coast Guard Light List

Federal Channel	
Depth FT MLLW	
<span style="display:inline-block; width:15px; height:15px; background-color:red;"></span>	-0.6 - 6
<span style="display:inline-block; width:15px; height:15px; background-color:orange;"></span>	6.1 - 8
<span style="display:inline-block; width:15px; height:15px; background-color:yellow;"></span>	8.1 - 10
<span style="display:inline-block; width:15px; height:15px; background-color:lightgreen;"></span>	10.1 - 12
<span style="display:inline-block; width:15px; height:15px; background-color:blue;"></span>	12.1 - 30

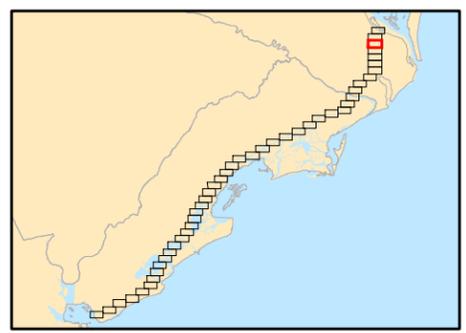

Survey Area: Atlantic Intracoastal Waterway - Winyah Bay to Charleston	
Survey Date:	2013-09
Survey Crew:	USACE Survey Team
Survey File Name:	20130900_ICW_WBC_MB_CS_ALL.xyz
Imagery/Background:	2011 NRCS NAIP
Mapped By:	


# AIWW W-C 4



USDA, FSA, APFO




## Atlantic Intracoastal Waterway

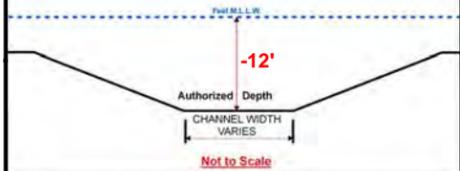


Notes:

- Soundings are expressed in positive feet and tenths and are referenced the Mean Lower Low Water (MLLW) datum
- Project surveyed with USACE survey vessels equipped with GPS positioning and hydrographic survey equipment that meets USACE Navigation and Dredging standards for soft bottom hydrographic surveys.
- Soundings are calibrated to tide gauges that are set to MLLW and referenced to published benchmarks
- Horizontal Datum: State Plane NAD-83 SC-3900 Intl Feet
- Project was designed by the Charleston District of the U.S. Army Corps of Engineers. The initials or signatures and registration designations of individuals appear on these project documents within the scope of their employment by ER 1110-1-8152
- Maps and associated information represents the result of surveys made on the date indicated and can only be considered as indicating the general condition existing at that time. These conditions are subject to rapid change due to shoaling events. A prudent mariner should not rely exclusively on the information provided here
- Aids to Navigation obtained from the U.S. Coast Guard Light List

Federal Channel	
Depth FT MLLW	
<span style="display:inline-block; width:15px; height:15px; background-color:red;"></span>	-0.6 - 6
<span style="display:inline-block; width:15px; height:15px; background-color:orange;"></span>	6.1 - 8
<span style="display:inline-block; width:15px; height:15px; background-color:yellow;"></span>	8.1 - 10
<span style="display:inline-block; width:15px; height:15px; background-color:lightgreen;"></span>	10.1 - 12
<span style="display:inline-block; width:15px; height:15px; background-color:blue;"></span>	12.1 - 30

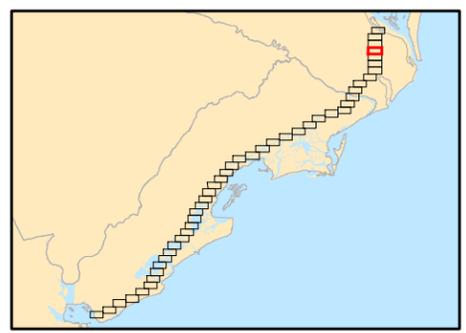



Survey Area: Atlantic Intracoastal Waterway - Winyah Bay to Charleston	
Survey Date:	2013-09
Survey Crew:	USACE Survey Team
Survey File Name:	20130900_ICW_WBC_MB_CS_ALL.xyz
Imagery/Background:	2011 NRCS NAIP
Mapped By:	

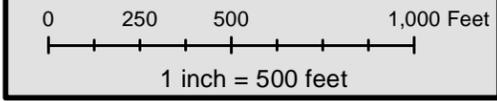

# AIWW W-C 5




USDA, FSA, APFO

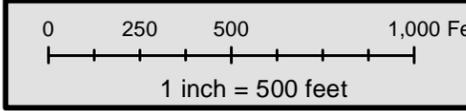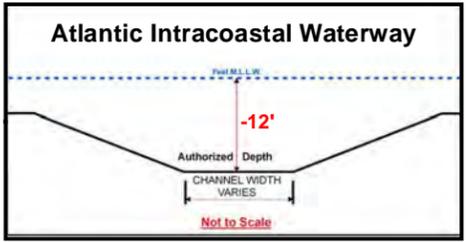

Notes:

- Soundings are expressed in positive feet and tenths and are referenced the Mean Lower Low Water (MLLW) datum
- Project surveyed with USACE survey vessels equipped with GPS positioning and hydrographic survey equipment that meets USACE Navigation and Dredging standards for soft bottom hydrographic surveys.
- Soundings are calibrated to tide gauges that are set to MLLW and referenced to published benchmarks
- Horizontal Datum: State Plane NAD-83 SC-3900 Intl Feet
- Project was designed by the Charleston District of the U.S. Army Corps of Engineers. The initials or signatures and registration designations of individuals appear on these project documents within the scope of their employment by ER 1110-1-8152
- Maps and associated information represents the result of surveys made on the date indicated and can only be considered as indicating the general condition existing at that time. These conditions are subject to rapid change due to shoaling events. A prudent mariner should not rely exclusively on the information provided here
- Aids to Navigation obtained from the U.S. Coast Guard Light List

Federal Channel	
Depth FT MLLW	
<span style="display:inline-block; width:15px; height:15px; background-color:red;"></span>	0.6 - 6
<span style="display:inline-block; width:15px; height:15px; background-color:orange;"></span>	6.1 - 8
<span style="display:inline-block; width:15px; height:15px; background-color:yellow;"></span>	8.1 - 10
<span style="display:inline-block; width:15px; height:15px; background-color:lightgreen;"></span>	10.1 - 12
<span style="display:inline-block; width:15px; height:15px; background-color:blue;"></span>	12.1 - 30


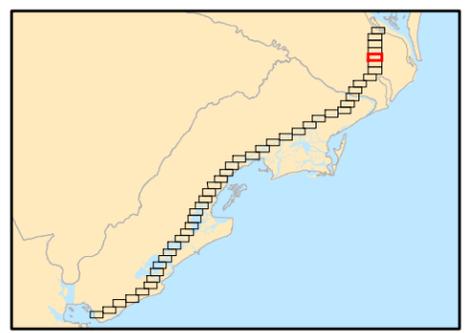


Survey Area: Atlantic Intracoastal Waterway - Winyah Bay to Charleston	
Survey Date:	2013-09
Survey Crew:	USACE Survey Team
Survey File Name:	20130900_ICW_WBC_MB_CS_ALL.xyz
Imagery/Background:	2011 NRCS NAIP
Mapped By:	

# AIWW W-C 6




USDA, FSA, APFO

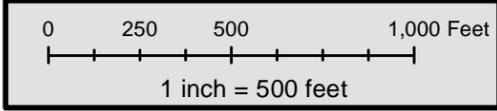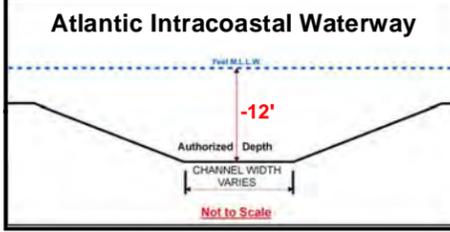

**Notes:**  
 - Soundings are expressed in positive feet and tenths and are referenced the Mean Lower Low Water (MLLW) datum  
 - Project surveyed with USACE survey vessels equipped with GPS positioning and hydrographic survey equipment that meets USACE Navigation and Dredging standards for soft bottom hydrographic surveys.  
 - Soundings are calibrated to tide gauges that are set to MLLW and referenced to published benchmarks  
 - Horizontal Datum: State Plane NAD-83 SC-3900 Intl Feet  
 - Project was designed by the Charleston District of the U.S. Army Corps of Engineers. The initials or signatures and registration designations of individuals appear on these project documents within the scope of their employment by ER 1110-1-8152  
 - Maps and associated information represents the result of surveys made on the date indicated and can only be considered as indicating the general condition existing at that time. These conditions are subject to rapid change due to shoaling events. A prudent mariner should not rely exclusively on the information provided here  
 - Aids to Navigation obtained from the U.S. Coast Guard Light List

Federal Channel	
Depth FT MLLW	
<span style="background-color: red; color: black;"> </span>	-0.6 - 6
<span style="background-color: orange; color: black;"> </span>	6.1 - 8
<span style="background-color: yellow; color: black;"> </span>	8.1 - 10
<span style="background-color: lightgreen; color: black;"> </span>	10.1 - 12
<span style="background-color: blue; color: black;"> </span>	12.1 - 30

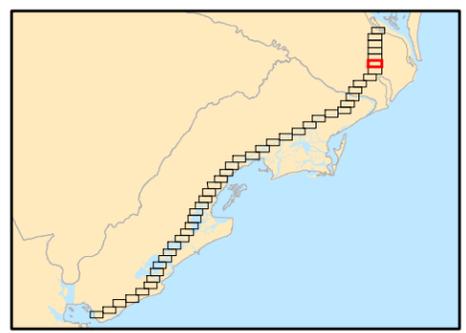

<b>Survey Area:</b> Atlantic Intracoastal Waterway - Winyah Bay to Charleston	
<b>Survey Date:</b>	2013-09
<b>Survey Crew:</b>	USACE Survey Team
<b>Survey File Name:</b>	20130900_ICW_WBC_MB_CS_ALL.xyz
<b>Imagery/Background:</b>	2011 NRCS NAIP
<b>Mapped By:</b>	

# AIWW W-C 7

FIR 4s



G 5

FIG 4s



USDA, FSA, APFO

## Atlantic Intracoastal Waterway

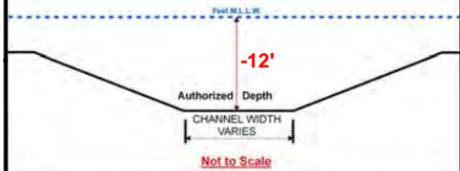


Notes:

- Soundings are expressed in positive feet and tenths and are referenced the Mean Lower Low Water (MLLW) datum
- Project surveyed with USACE survey vessels equipped with GPS positioning and hydrographic survey equipment that meets USACE Navigation and Dredging standards for soft bottom hydrographic surveys.
- Soundings are calibrated to tide gauges that are set to MLLW and referenced to published benchmarks
- Horizontal Datum: State Plane NAD-83 SC-3900 Intl Feet
- Project was designed by the Charleston District of the U.S. Army Corps of Engineers. The initials or signatures and registration designations of individuals appear on these project documents within the scope of their employment by ER 1110-1-8152
- Maps and associated information represents the result of surveys made on the date indicated and can only be considered as indicating the general condition existing at that time. These conditions are subject to rapid change due to shoaling events. A prudent mariner should not rely exclusively on the information provided here
- Aids to Navigation obtained from the U.S. Coast Guard Light List

Federal Channel

### Depth FT MLLW



**US Army Corps  
Of Engineers®**  
Charleston District

**Survey Area:** Atlantic Intracoastal Waterway - Winyah Bay to Charleston

**Survey Date:** 2013-09




**Survey Crew:** USACE Survey Team

**Survey File Name:** 20130900\_ICW\_WBC\_MB\_CS\_ALL.xyz

**Imagery/Background:** 2011 NRCS NAIP


**Mapped By:**

# AIWW W-C 8

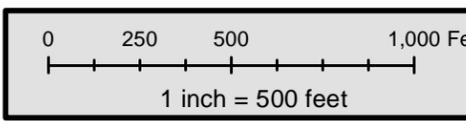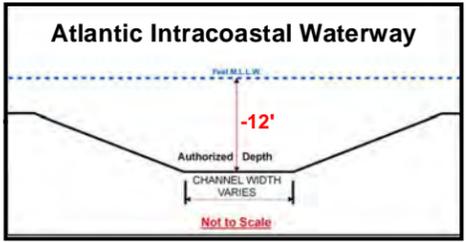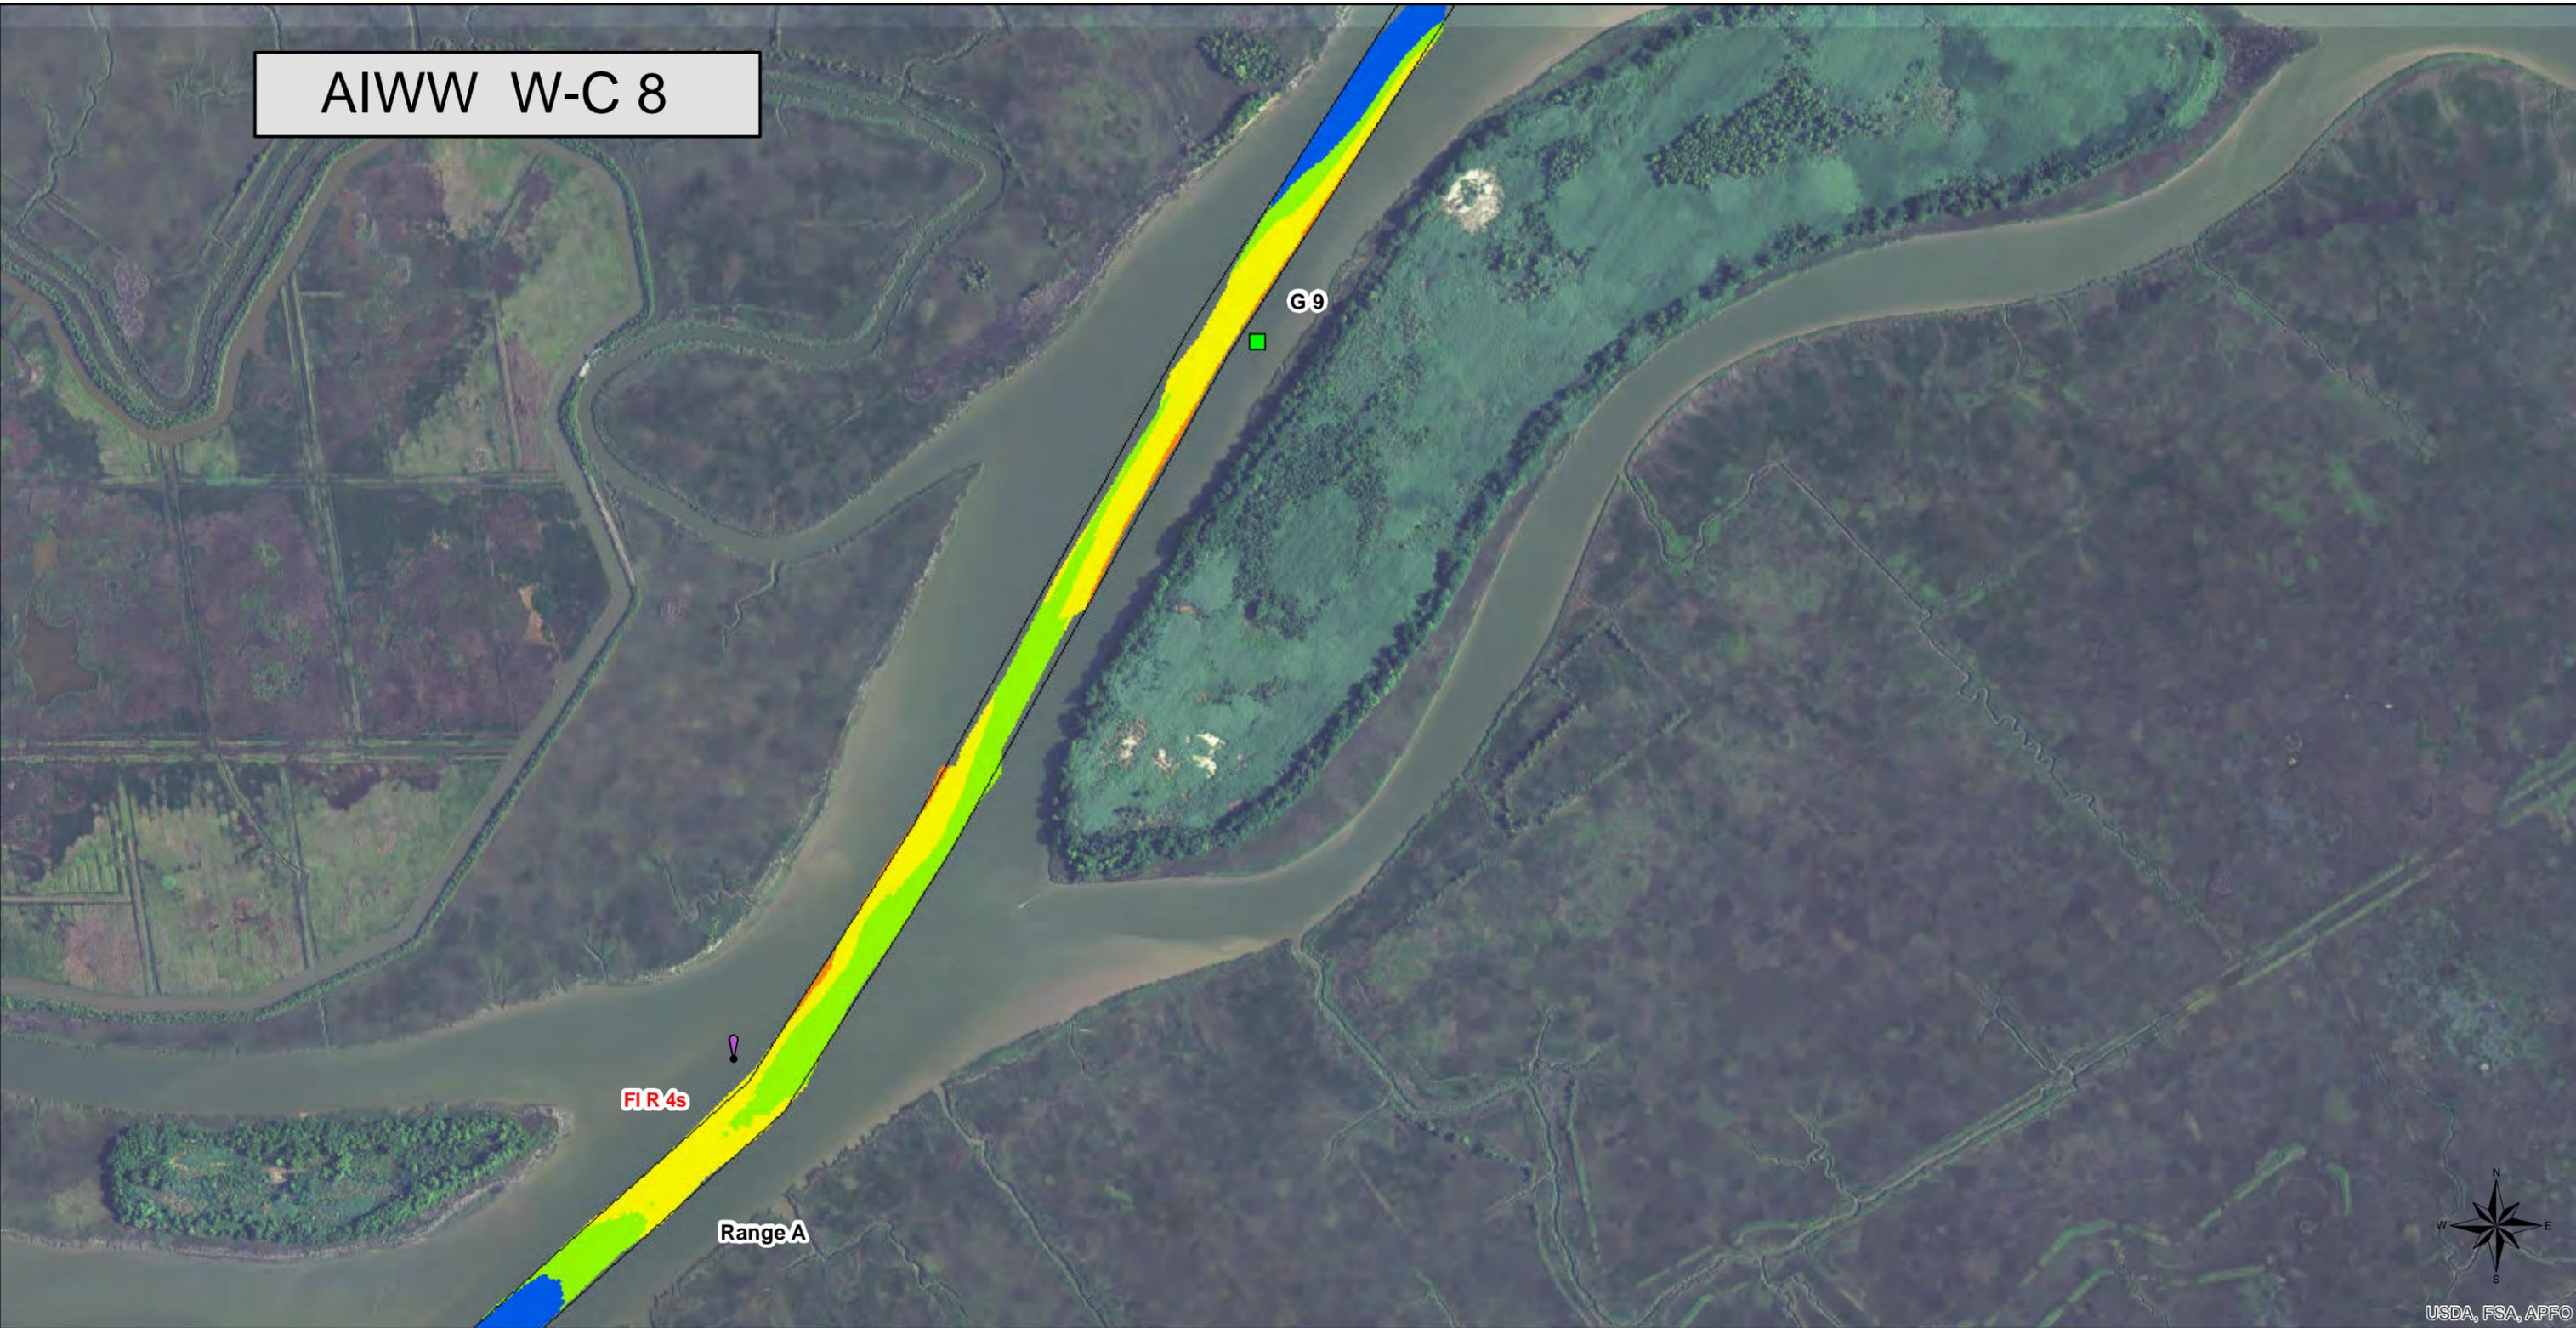

Notes:  
 - Soundings are expressed in positive feet and tenths and are referenced the Mean Lower Low Water (MLLW) datum  
 - Project surveyed with USACE survey vessels equipped with GPS positioning and hydrographic survey equipment that meets USACE Navigation and Dredging standards for soft bottom hydrographic surveys.  
 - Soundings are calibrated to tide gauges that are set to MLLW and referenced to published benchmarks  
 - Horizontal Datum: State Plane NAD-83 SC-3900 Intl Feet  
 - Project was designed by the Charleston District of the U.S. Army Corps of Engineers. The initials or signatures and registration designations of individuals appear on these project documents within the scope of their employment by ER 1110-1-8152  
 - Maps and associated information represents the result of surveys made on the date indicated and can only be considered as indicating the general condition existing at that time. These conditions are subject to rapid change due to shoaling events. A prudent mariner should not rely exclusively on the information provided here  
 - Aids to Navigation obtained from the U.S. Coast Guard Light List

	Federal Channel
<b>Depth FT MLLW</b>	
	-0.6 - 6
	6.1 - 8
	8.1 - 10
	10.1 - 12
	12.1 - 30

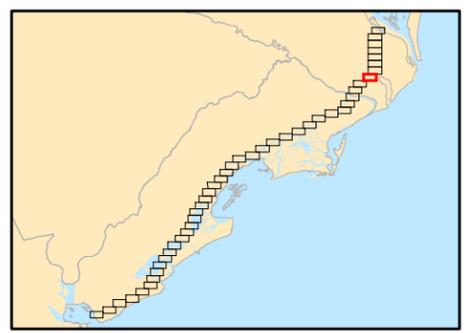

<b>Survey Area:</b> Atlantic Intracoastal Waterway - Winyah Bay to Charleston	
<b>Survey Date:</b>	2013-09
<b>Survey Crew:</b>	USACE Survey Team
<b>Survey File Name:</b>	20130900_ICW_WBC_MB_CS_ALL.xyz
<b>Imagery/Background:</b>	2011 NRCS NAIP
<b>Mapped By:</b>	

# AIWW W-C 9

FIR 4s

R.16

FIG 4s

Range A

Range B


Range B

G19




USDA, FSA, APFO

## Atlantic Intracoastal Waterway

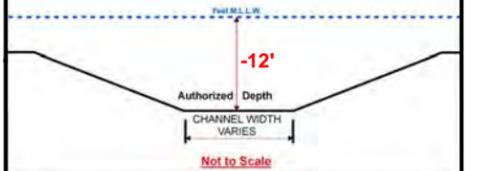


Notes:  
 - Soundings are expressed in positive feet and tenths and are referenced the Mean Lower Low Water (MLLW) datum  
 - Project surveyed with USACE survey vessels equipped with GPS positioning and hydrographic survey equipment that meets USACE Navigation and Dredging standards for soft bottom hydrographic surveys.  
 - Soundings are calibrated to tide gauges that are set to MLLW and referenced to published benchmarks  
 - Horizontal Datum: State Plane NAD-83 SC-3900 Intl Feet  
 - Project was designed by the Charleston District of the U.S. Army Corps of Engineers. The initials or signatures and registration designations of individuals appear on these project documents within the scope of their employment by ER 1110-1-8152  
 - Maps and associated information represents the result of surveys made on the date indicated and can only be considered as indicating the general condition existing at that time. These conditions are subject to rapid change due to shoaling events. A prudent mariner should not rely exclusively on the information provided here  
 - Aids to Navigation obtained from the U.S. Coast Guard Light List

Federal Channel	
Depth FT MLLW	
<span style="display:inline-block; width:15px; height:15px; background-color:red;"></span>	-0.6 - 6
<span style="display:inline-block; width:15px; height:15px; background-color:orange;"></span>	6.1 - 8
<span style="display:inline-block; width:15px; height:15px; background-color:yellow;"></span>	8.1 - 10
<span style="display:inline-block; width:15px; height:15px; background-color:lightgreen;"></span>	10.1 - 12
<span style="display:inline-block; width:15px; height:15px; background-color:blue;"></span>	12.1 - 30

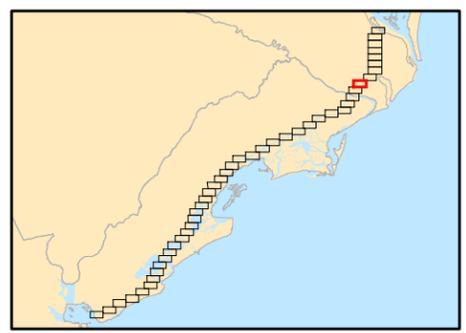


<b>Survey Area:</b> Atlantic Intracoastal Waterway - Winyah Bay to Charleston	
<b>Survey Date:</b>	2013-09
<b>Survey Crew:</b>	USACE Survey Team
<b>Survey File Name:</b>	20130900_ICW_WBC_MB_CS_ALL.xyz
<b>Imagery/Background:</b>	2011 NRCS NAIP
<b>Mapped By:</b>	

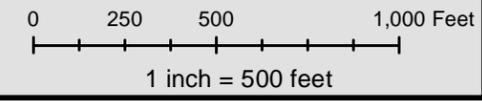



# AIWW W-C 10



USDA, FSA, APFO

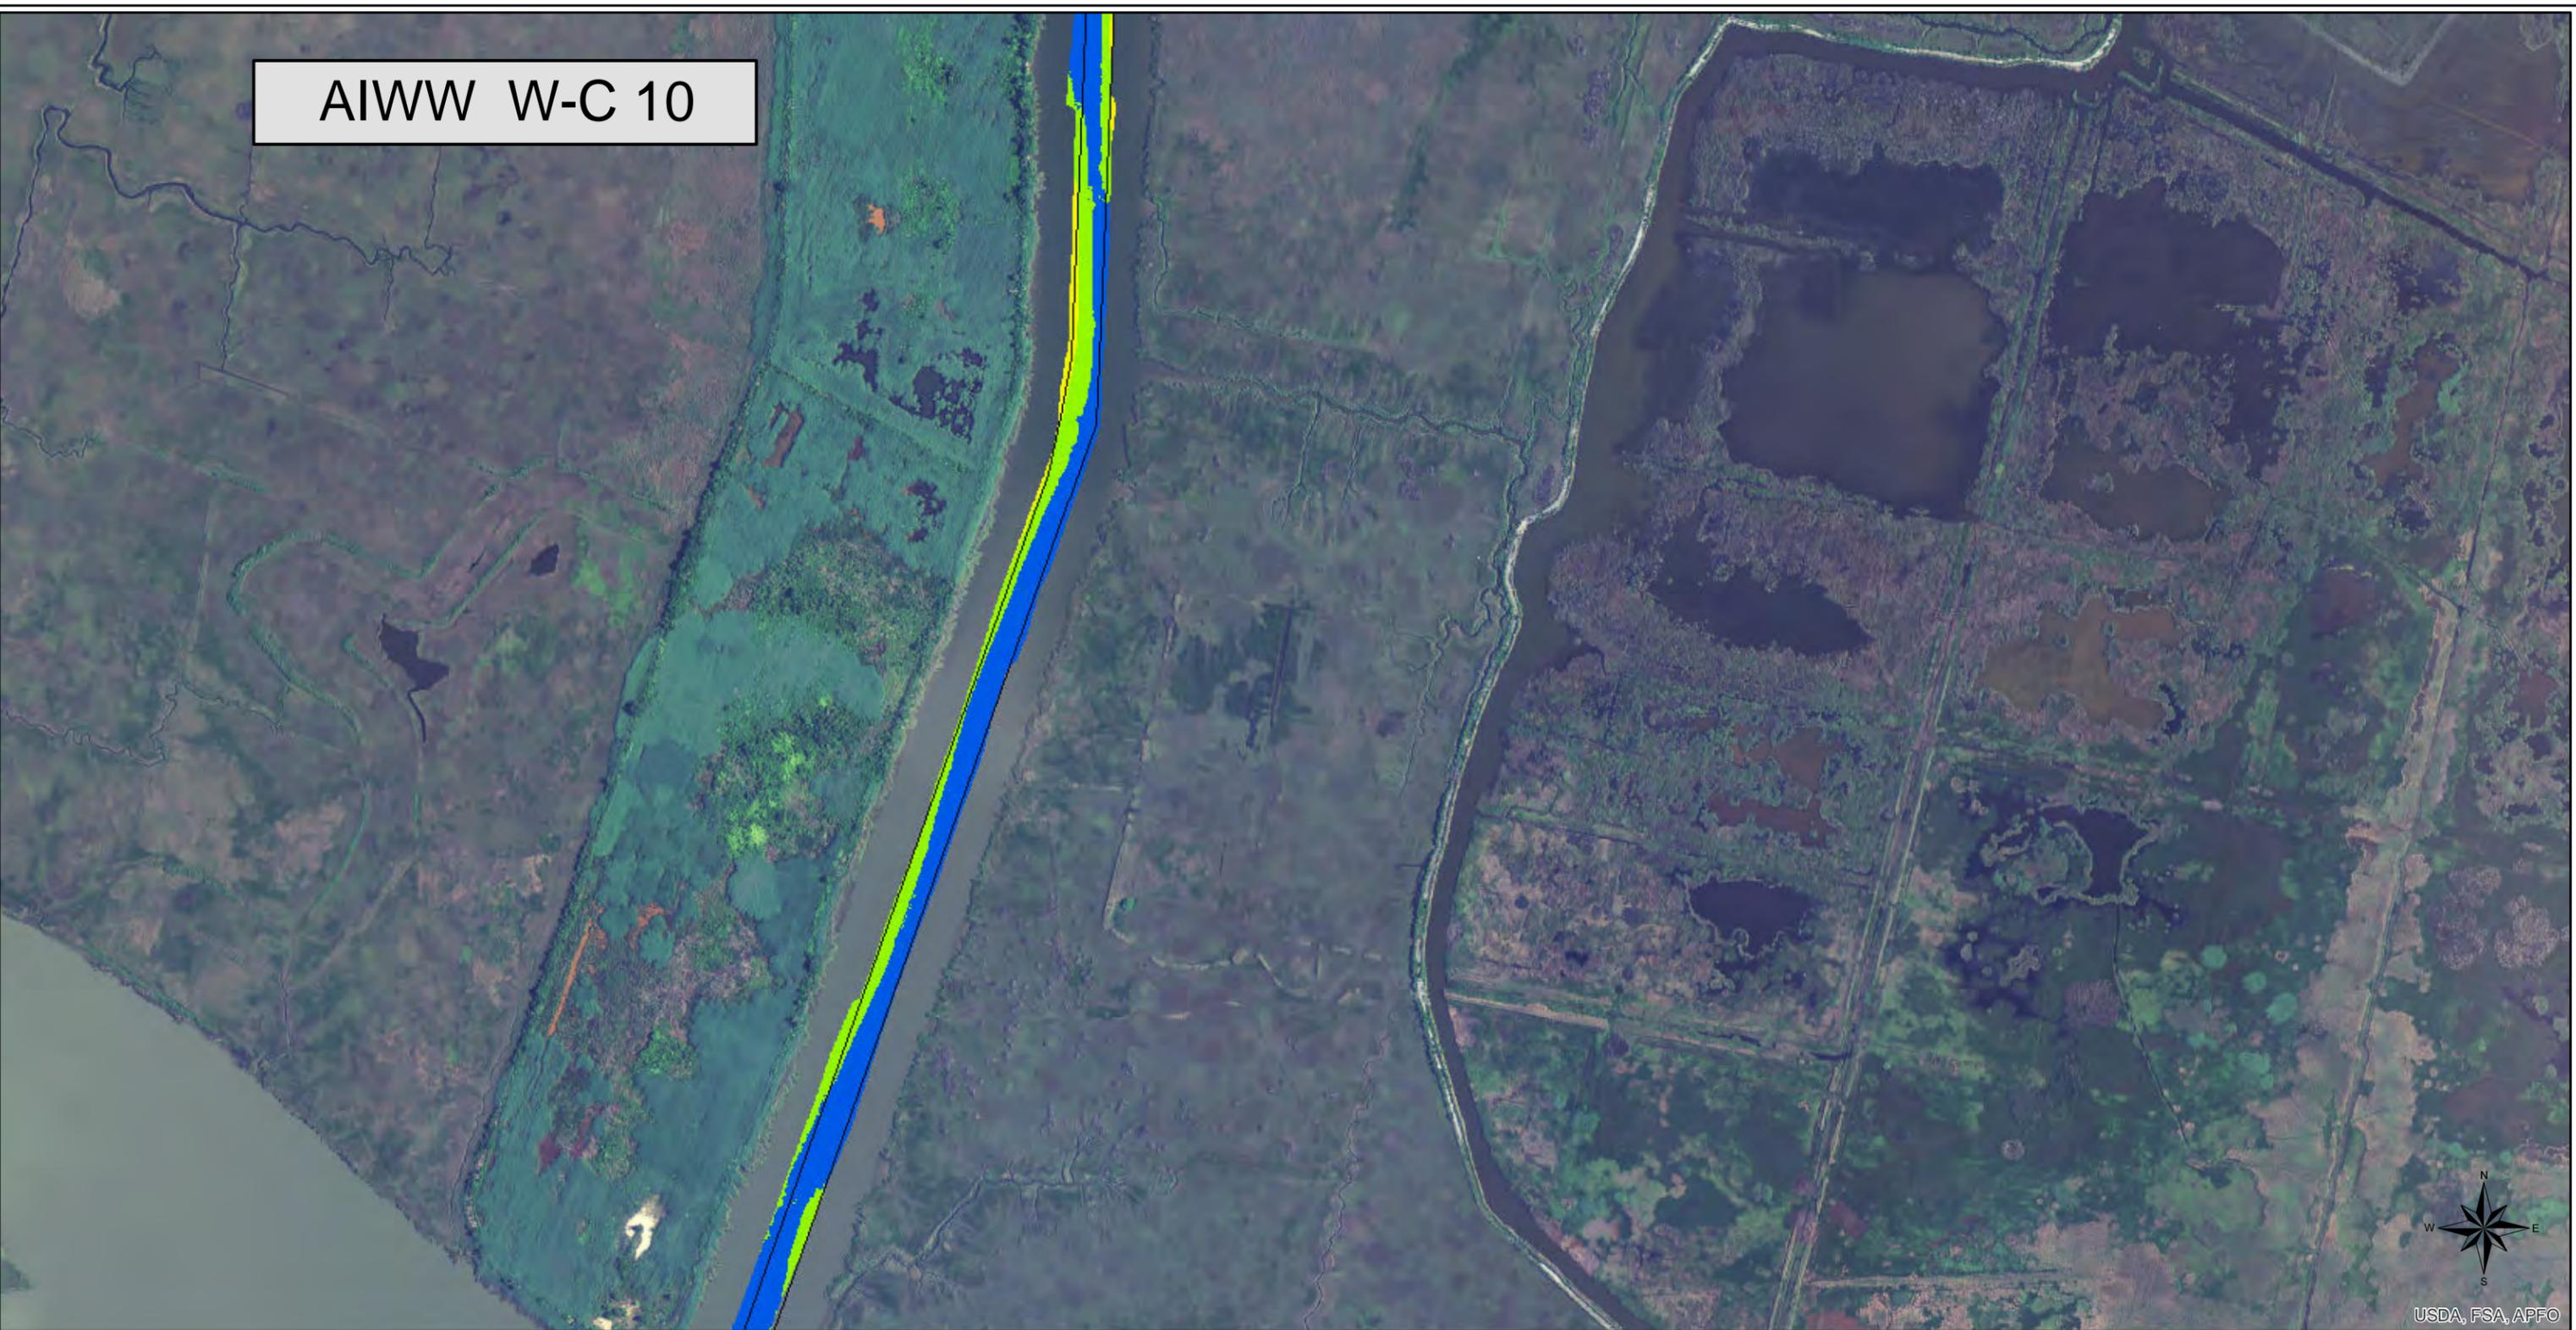


## Atlantic Intracoastal Waterway

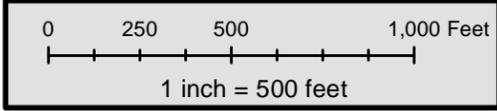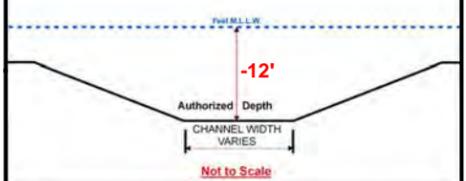



Notes:  
 - Soundings are expressed in positive feet and tenths and are referenced the Mean Lower Low Water (MLLW) datum  
 - Project surveyed with USACE survey vessels equipped with GPS positioning and hydrographic survey equipment that meets USACE Navigation and Dredging standards for soft bottom hydrographic surveys.  
 - Soundings are calibrated to tide gauges that are set to MLLW and referenced to published benchmarks  
 - Horizontal Datum: State Plane NAD-83 SC-3900 Intl Feet  
 - Project was designed by the Charleston District of the U.S. Army Corps of Engineers. The initials or signatures and registration designations of individuals appear on these project documents within the scope of their employment by ER 1110-1-8152  
 - Maps and associated information represents the result of surveys made on the date indicated and can only be considered as indicating the general condition existing at that time. These conditions are subject to rapid change due to shoaling events. A prudent mariner should not rely exclusively on the information provided here  
 - Aids to Navigation obtained from the U.S. Coast Guard Light List

Federal Channel	
Depth FT MLLW	
<span style="display:inline-block; width:15px; height:15px; background-color:red;"></span>	-0.6 - 6
<span style="display:inline-block; width:15px; height:15px; background-color:orange;"></span>	6.1 - 8
<span style="display:inline-block; width:15px; height:15px; background-color:yellow;"></span>	8.1 - 10
<span style="display:inline-block; width:15px; height:15px; background-color:lightgreen;"></span>	10.1 - 12
<span style="display:inline-block; width:15px; height:15px; background-color:blue;"></span>	12.1 - 30

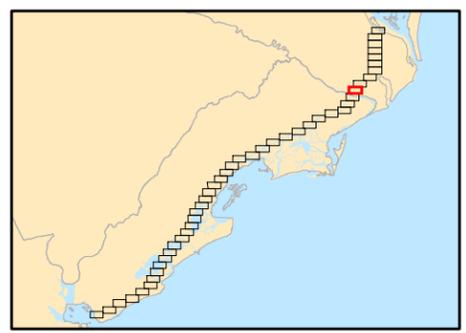

<b>Survey Area:</b> Atlantic Intracoastal Waterway - Winyah Bay to Charleston	
<b>Survey Date:</b>	2013-09
<b>Survey Crew:</b>	USACE Survey Team
<b>Survey File Name:</b>	20130900_ICW_WBC_MB_CS_ALL.xyz
<b>Imagery/Background:</b>	2011 NRCS NAIP
<b>Mapped By:</b>	

# AIWW W-C 11

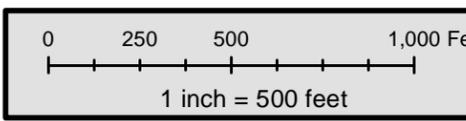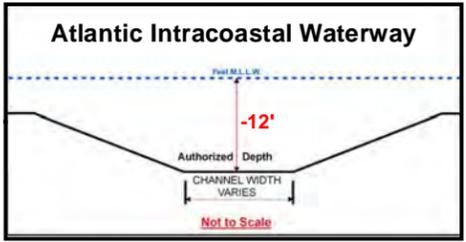


Notes:  
 - Soundings are expressed in positive feet and tenths and are referenced the Mean Lower Low Water (MLLW) datum  
 - Project surveyed with USACE survey vessels equipped with GPS positioning and hydrographic survey equipment that meets USACE Navigation and Dredging standards for soft bottom hydrographic surveys.  
 - Soundings are calibrated to tide gauges that are set to MLLW and referenced to published benchmarks  
 - Horizontal Datum: State Plane NAD-83 SC-3900 Intl Feet  
 - Project was designed by the Charleston District of the U.S. Army Corps of Engineers. The initials or signatures and registration designations of individuals appear on these project documents within the scope of their employment by ER 1110-1-8152  
 - Maps and associated information represents the result of surveys made on the date indicated and can only be considered as indicating the general condition existing at that time. These conditions are subject to rapid change due to shoaling events. A prudent mariner should not rely exclusively on the information provided here  
 - Aids to Navigation obtained from the U.S. Coast Guard Light List

Federal Channel	
Depth FT MLLW	
<span style="display:inline-block; width:15px; height:15px; background-color:red; border:1px solid black;"></span>	-0.6 - 6
<span style="display:inline-block; width:15px; height:15px; background-color:orange; border:1px solid black;"></span>	6.1 - 8
<span style="display:inline-block; width:15px; height:15px; background-color:yellow; border:1px solid black;"></span>	8.1 - 10
<span style="display:inline-block; width:15px; height:15px; background-color:lightgreen; border:1px solid black;"></span>	10.1 - 12
<span style="display:inline-block; width:15px; height:15px; background-color:blue; border:1px solid black;"></span>	12.1 - 30




<b>Survey Area:</b> Atlantic Intracoastal Waterway - Winyah Bay to Charleston	
<b>Survey Date:</b>	2013-09
<b>Survey Crew:</b>	USACE Survey Team
<b>Survey File Name:</b>	20130900_ICW_WBC_MB_CS_ALL.xyz
<b>Imagery/Background:</b>	2011 NRCS NAIP
<b>Mapped By:</b>	

# AIWW W-C 12

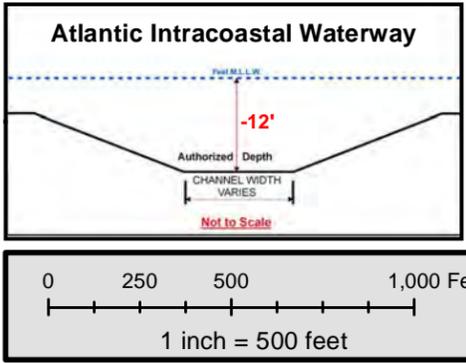

Notes:  
 - Soundings are expressed in positive feet and tenths and are referenced the Mean Lower Low Water (MLLW) datum  
 - Project surveyed with USACE survey vessels equipped with GPS positioning and hydrographic survey equipment that meets USACE Navigation and Dredging standards for soft bottom hydrographic surveys.  
 - Soundings are calibrated to tide gauges that are set to MLLW and referenced to published benchmarks  
 - Horizontal Datum: State Plane NAD-83 SC-3900 Intl Feet  
 - Project was designed by the Charleston District of the U.S. Army Corps of Engineers. The initials or signatures and registration designations of individuals appear on these project documents within the scope of their employment by ER 1110-1-8152  
 - Maps and associated information represents the result of surveys made on the date indicated and can only be considered as indicating the general condition existing at that time. These conditions are subject to rapid change due to shoaling events. A prudent mariner should not rely exclusively on the information provided here  
 - Aids to Navigation obtained from the U.S. Coast Guard Light List

Federal Channel	
Depth FT MLLW	
<span style="background-color: red; color: black;"> </span>	-0.6 - 6
<span style="background-color: orange; color: black;"> </span>	6.1 - 8
<span style="background-color: yellow; color: black;"> </span>	8.1 - 10
<span style="background-color: lightgreen; color: black;"> </span>	10.1 - 12
<span style="background-color: blue; color: black;"> </span>	12.1 - 30


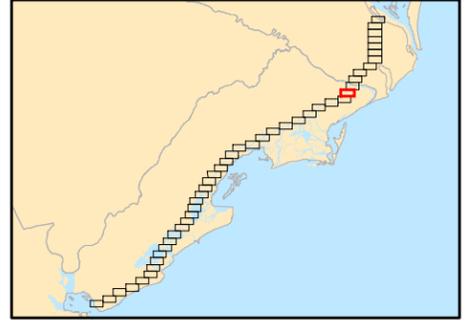


<b>Survey Area:</b> Atlantic Intracoastal Waterway - Winyah Bay to Charleston	
<b>Survey Date:</b>	2013-09
<b>Survey Crew:</b>	USACE Survey Team
<b>Survey File Name:</b>	20130900_ICW_WBC_MB_CS_ALL.xyz
<b>Imagery/Background:</b>	2011 NRCS NAIP
<b>Mapped By:</b>	

# AIWW W-C 13




USDA, FSA, APFO

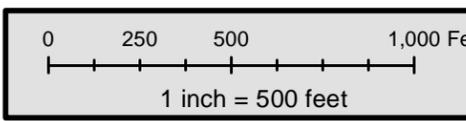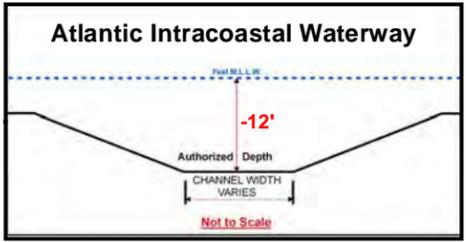

Notes:  
 - Soundings are expressed in positive feet and tenths and are referenced the Mean Lower Low Water (MLLW) datum  
 - Project surveyed with USACE survey vessels equipped with GPS positioning and hydrographic survey equipment that meets USACE Navigation and Dredging standards for soft bottom hydrographic surveys.  
 - Soundings are calibrated to tide gauges that are set to MLLW and referenced to published benchmarks  
 - Horizontal Datum: State Plane NAD-83 SC-3900 Intl Feet  
 - Project was designed by the Charleston District of the U.S. Army Corps of Engineers. The initials or signatures and registration designations of individuals appear on these project documents within the scope of their employment by ER 1110-1-8152  
 - Maps and associated information represents the result of surveys made on the date indicated and can only be considered as indicating the general condition existing at that time. These conditions are subject to rapid change due to shoaling events. A prudent mariner should not rely exclusively on the information provided here  
 - Aids to Navigation obtained from the U.S. Coast Guard Light List

Federal Channel	
Depth FT MLLW	
<span style="display:inline-block; width:15px; height:15px; background-color:red;"></span>	-0.6 - 6
<span style="display:inline-block; width:15px; height:15px; background-color:orange;"></span>	6.1 - 8
<span style="display:inline-block; width:15px; height:15px; background-color:yellow;"></span>	8.1 - 10
<span style="display:inline-block; width:15px; height:15px; background-color:lightgreen;"></span>	10.1 - 12
<span style="display:inline-block; width:15px; height:15px; background-color:blue;"></span>	12.1 - 30


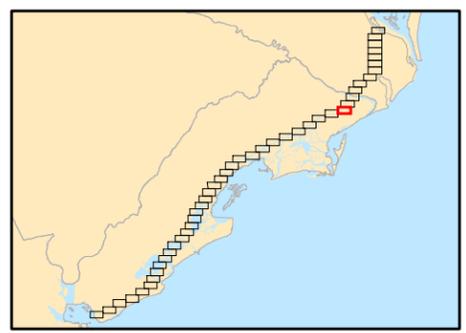


Survey Area: Atlantic Intracoastal Waterway - Winyah Bay to Charleston	
Survey Date:	2013-09
Survey Crew:	USACE Survey Team
Survey File Name:	20130900_ICW_WBC_MB_CS_ALL.xyz
Imagery/Background:	2011 NRCS NAIP
Mapped By:	

# AIWW W-C 14




USDA, FSA, APFO

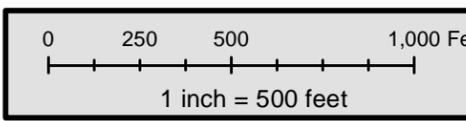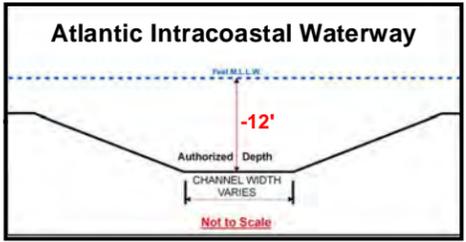

**Notes:**  
 - Soundings are expressed in positive feet and tenths and are referenced the Mean Lower Low Water (MLLW) datum  
 - Project surveyed with USACE survey vessels equipped with GPS positioning and hydrographic survey equipment that meets USACE Navigation and Dredging standards for soft bottom hydrographic surveys.  
 - Soundings are calibrated to tide gauges that are set to MLLW and referenced to published benchmarks  
 - Horizontal Datum: State Plane NAD-83 SC-3900 Intl Feet  
 - Project was designed by the Charleston District of the U.S. Army Corps of Engineers. The initials or signatures and registration designations of individuals appear on these project documents within the scope of their employment by ER 1110-1-8152  
 - Maps and associated information represents the result of surveys made on the date indicated and can only be considered as indicating the general condition existing at that time. These conditions are subject to rapid change due to shoaling events. A prudent mariner should not rely exclusively on the information provided here  
 - Aids to Navigation obtained from the U.S. Coast Guard Light List

Federal Channel	
Depth FT MLLW	
<span style="display:inline-block; width:15px; height:15px; background-color:red;"></span>	-0.6 - 6
<span style="display:inline-block; width:15px; height:15px; background-color:orange;"></span>	6.1 - 8
<span style="display:inline-block; width:15px; height:15px; background-color:yellow;"></span>	8.1 - 10
<span style="display:inline-block; width:15px; height:15px; background-color:lightgreen;"></span>	10.1 - 12
<span style="display:inline-block; width:15px; height:15px; background-color:blue;"></span>	12.1 - 30


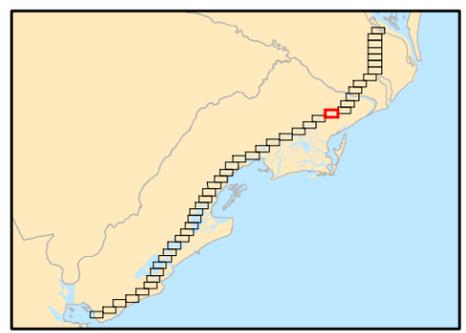


<b>Survey Area:</b> Atlantic Intracoastal Waterway - Winyah Bay to Charleston	
<b>Survey Date:</b>	2013-09
<b>Survey Crew:</b>	USACE Survey Team
<b>Survey File Name:</b>	20130900_ICW_WBC_MB_CS_ALL.xyz
<b>Imagery/Background:</b>	2011 NRCS NAIP
<b>Mapped By:</b>	

# AIWW W-C 15




USDA, FSA, APFO

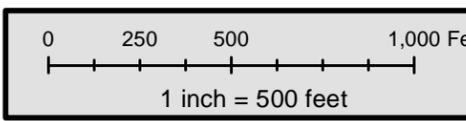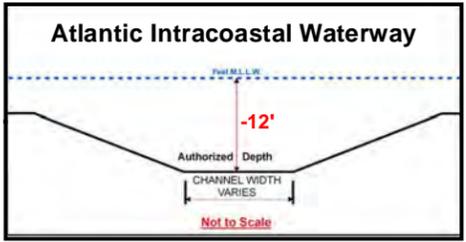


**Notes:**  
 - Soundings are expressed in positive feet and tenths and are referenced the Mean Lower Low Water (MLLW) datum  
 - Project surveyed with USACE survey vessels equipped with GPS positioning and hydrographic survey equipment that meets USACE Navigation and Dredging standards for soft bottom hydrographic surveys.  
 - Soundings are calibrated to tide gauges that are set to MLLW and referenced to published benchmarks  
 - Horizontal Datum: State Plane NAD-83 SC-3900 Intl Feet  
 - Project was designed by the Charleston District of the U.S. Army Corps of Engineers. The initials or signatures and registration designations of individuals appear on these project documents within the scope of their employment by ER 1110-1-8152  
 - Maps and associated information represents the result of surveys made on the date indicated and can only be considered as indicating the general condition existing at that time. These conditions are subject to rapid change due to shoaling events. A prudent mariner should not rely exclusively on the information provided here  
 - Aids to Navigation obtained from the U.S. Coast Guard Light List

Federal Channel	
Depth FT MLLW	
<span style="display:inline-block; width:15px; height:15px; background-color:red;"></span>	-0.6 - 6
<span style="display:inline-block; width:15px; height:15px; background-color:orange;"></span>	6.1 - 8
<span style="display:inline-block; width:15px; height:15px; background-color:yellow;"></span>	8.1 - 10
<span style="display:inline-block; width:15px; height:15px; background-color:lightgreen;"></span>	10.1 - 12
<span style="display:inline-block; width:15px; height:15px; background-color:blue;"></span>	12.1 - 30


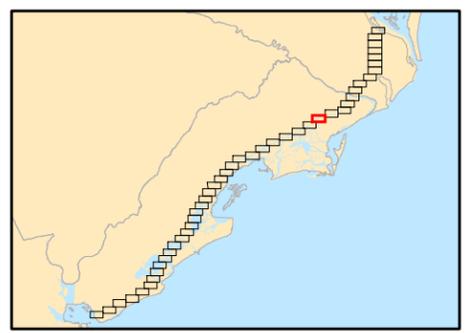


Survey Area: Atlantic Intracoastal Waterway - Winyah Bay to Charleston	
Survey Date:	2013-09
Survey Crew:	USACE Survey Team
Survey File Name:	20130900_ICW_WBC_MB_CS_ALL.xyz
Imagery/Background:	2011 NRCS NAIP
Mapped By:	

# AIWW W-C 16

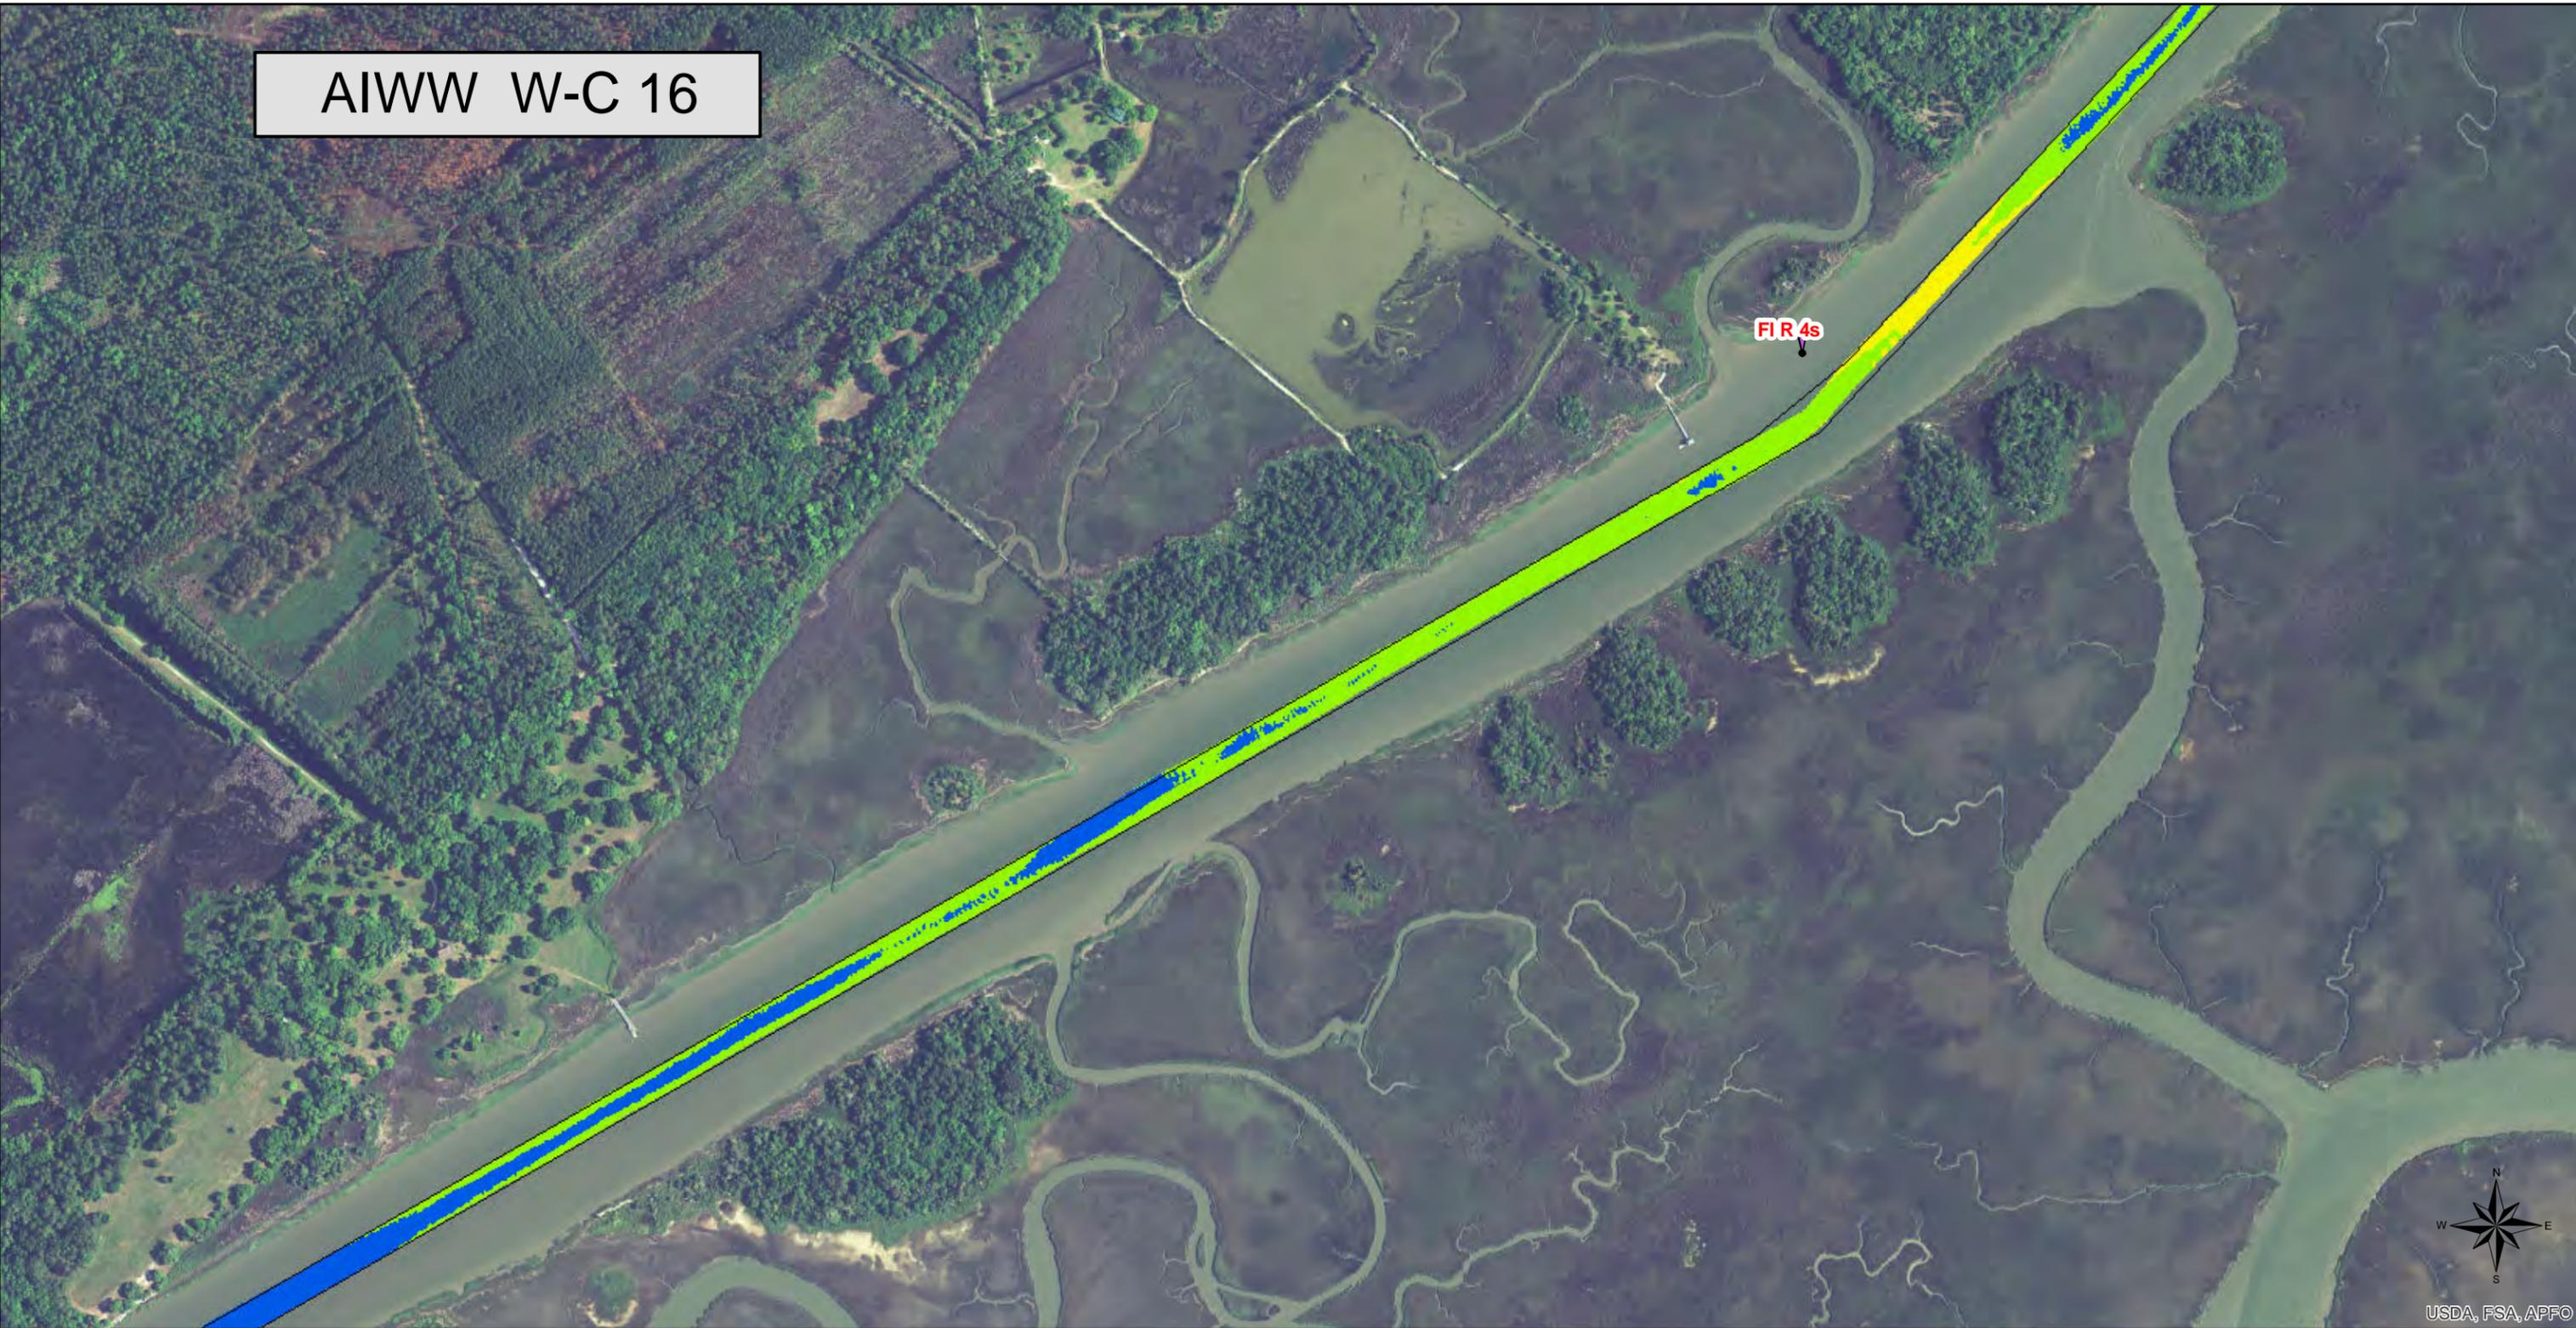

USDA, FSA, APFO

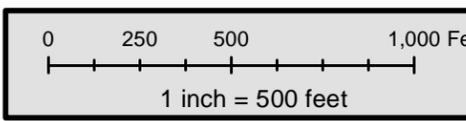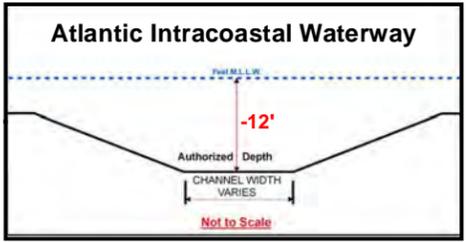

Notes:  
 - Soundings are expressed in positive feet and tenths and are referenced the Mean Lower Low Water (MLLW) datum  
 - Project surveyed with USACE survey vessels equipped with GPS positioning and hydrographic survey equipment that meets USACE Navigation and Dredging standards for soft bottom hydrographic surveys.  
 - Soundings are calibrated to tide gauges that are set to MLLW and referenced to published benchmarks  
 - Horizontal Datum: State Plane NAD-83 SC-3900 Intl Feet  
 - Project was designed by the Charleston District of the U.S. Army Corps of Engineers. The initials or signatures and registration designations of individuals appear on these project documents within the scope of their employment by ER 1110-1-8152  
 - Maps and associated information represents the result of surveys made on the date indicated and can only be considered as indicating the general condition existing at that time. These conditions are subject to rapid change due to shoaling events. A prudent mariner should not rely exclusively on the information provided here  
 - Aids to Navigation obtained from the U.S. Coast Guard Light List

Federal Channel	
Depth FT MLLW	
<span style="display:inline-block; width:15px; height:15px; background-color:red;"></span>	-0.6 - 6
<span style="display:inline-block; width:15px; height:15px; background-color:orange;"></span>	6.1 - 8
<span style="display:inline-block; width:15px; height:15px; background-color:yellow;"></span>	8.1 - 10
<span style="display:inline-block; width:15px; height:15px; background-color:lightgreen;"></span>	10.1 - 12
<span style="display:inline-block; width:15px; height:15px; background-color:blue;"></span>	12.1 - 30





Survey Area: Atlantic Intracoastal Waterway - Winyah Bay to Charleston	
Survey Date:	2013-09
Survey Crew:	USACE Survey Team
Survey File Name:	20130900_ICW_WBC_MB_CS_ALL.xyz
Imagery/Background:	2011 NRCS NAIP
Mapped By:	

# AIWW W-C 17




USDA, FSA, APFO

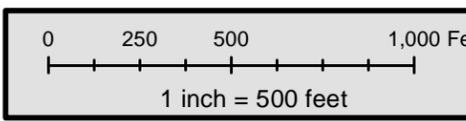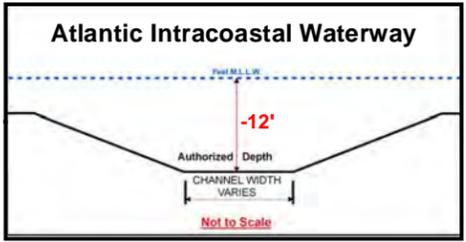

**Notes:**  
 - Soundings are expressed in positive feet and tenths and are referenced the Mean Lower Low Water (MLLW) datum  
 - Project surveyed with USACE survey vessels equipped with GPS positioning and hydrographic survey equipment that meets USACE Navigation and Dredging standards for soft bottom hydrographic surveys.  
 - Soundings are calibrated to tide gauges that are set to MLLW and referenced to published benchmarks  
 - Horizontal Datum: State Plane NAD-83 SC-3900 Intl Feet  
 - Project was designed by the Charleston District of the U.S. Army Corps of Engineers. The initials or signatures and registration designations of individuals appear on these project documents within the scope of their employment by ER 1110-1-8152  
 - Maps and associated information represents the result of surveys made on the date indicated and can only be considered as indicating the general condition existing at that time. These conditions are subject to rapid change due to shoaling events. A prudent mariner should not rely exclusively on the information provided here  
 - Aids to Navigation obtained from the U.S. Coast Guard Light List

Federal Channel	
Depth FT MLLW	
<span style="display:inline-block; width:15px; height:15px; background-color:red;"></span>	-0.6 - 6
<span style="display:inline-block; width:15px; height:15px; background-color:orange;"></span>	6.1 - 8
<span style="display:inline-block; width:15px; height:15px; background-color:yellow;"></span>	8.1 - 10
<span style="display:inline-block; width:15px; height:15px; background-color:lightgreen;"></span>	10.1 - 12
<span style="display:inline-block; width:15px; height:15px; background-color:blue;"></span>	12.1 - 30

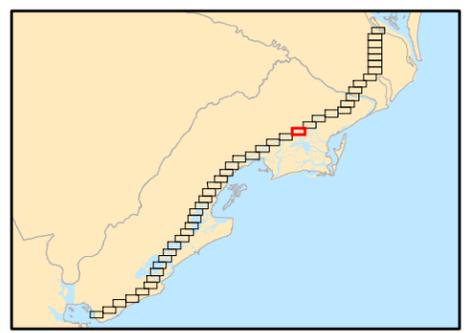



<b>Survey Area:</b> Atlantic Intracoastal Waterway - Winyah Bay to Charleston	
<b>Survey Date:</b>	2013-09
<b>Survey Crew:</b>	USACE Survey Team
<b>Survey File Name:</b>	20130900_ICW_WBC_MB_CS_ALL.xyz
<b>Imagery/Background:</b>	2011 NRCS NAIP
<b>Mapped By:</b>	

# AIWW W-C 18

Robert E Ashley




USDA, FSA, APFO

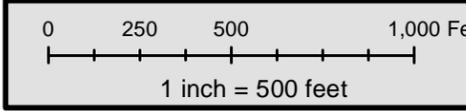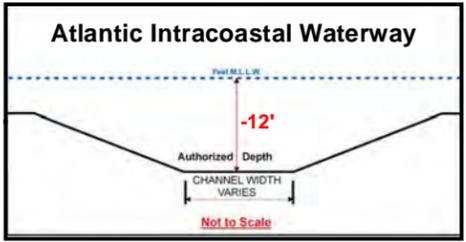



Notes:  
 - Soundings are expressed in positive feet and tenths and are referenced the Mean Lower Low Water (MLLW) datum  
 - Project surveyed with USACE survey vessels equipped with GPS positioning and hydrographic survey equipment that meets USACE Navigation and Dredging standards for soft bottom hydrographic surveys.  
 - Soundings are calibrated to tide gauges that are set to MLLW and referenced to published benchmarks  
 - Horizontal Datum: State Plane NAD-83 SC-3900 Intl Feet  
 - Project was designed by the Charleston District of the U.S. Army Corps of Engineers. The initials or signatures and registration designations of individuals appear on these project documents within the scope of their employment by ER 1110-1-8152  
 - Maps and associated information represents the result of surveys made on the date indicated and can only be considered as indicating the general condition existing at that time. These conditions are subject to rapid change due to shoaling events. A prudent mariner should not rely exclusively on the information provided here  
 - Aids to Navigation obtained from the U.S. Coast Guard Light List

Federal Channel	
Depth FT MLLW	
<span style="background-color: red; color: black;">■</span>	-0.6 - 6
<span style="background-color: orange; color: black;">■</span>	6.1 - 8
<span style="background-color: yellow; color: black;">■</span>	8.1 - 10
<span style="background-color: lightgreen; color: black;">■</span>	10.1 - 12
<span style="background-color: blue; color: black;">■</span>	12.1 - 30

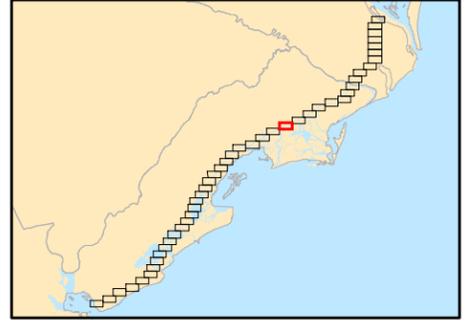


<b>Survey Area:</b> Atlantic Intracoastal Waterway - Winyah Bay to Charleston	
<b>Survey Date:</b>	2013-09
<b>Survey Crew:</b>	USACE Survey Team
<b>Survey File Name:</b>	20130900_ICW_WBC_MB_CS_ALL.xyz
<b>Imagery/Background:</b>	2011 NRCS NAIP
<b>Mapped By:</b>	

# AIWW W-C 19

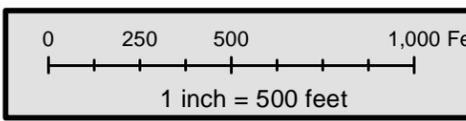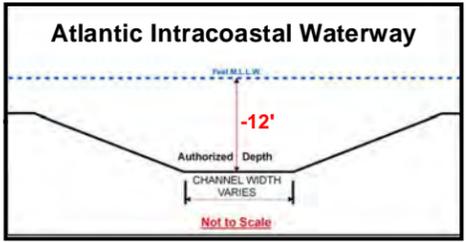




Notes:  
 - Soundings are expressed in positive feet and tenths and are referenced the Mean Lower Low Water (MLLW) datum  
 - Project surveyed with USACE survey vessels equipped with GPS positioning and hydrographic survey equipment that meets USACE Navigation and Dredging standards for soft bottom hydrographic surveys.  
 - Soundings are calibrated to tide gauges that are set to MLLW and referenced to published benchmarks  
 - Horizontal Datum: State Plane NAD-83 SC-3900 Intl Feet  
 - Project was designed by the Charleston District of the U.S. Army Corps of Engineers. The initials or signatures and registration designations of individuals appear on these project documents within the scope of their employment by ER 1110-1-8152  
 - Maps and associated information represents the result of surveys made on the date indicated and can only be considered as indicating the general condition existing at that time. These conditions are subject to rapid change due to shoaling events. A prudent mariner should not rely exclusively on the information provided here  
 - Aids to Navigation obtained from the U.S. Coast Guard Light List

Federal Channel	
Depth FT MLLW	
<span style="display:inline-block; width:15px; height:15px; background-color:red;"></span>	-0.6 - 6
<span style="display:inline-block; width:15px; height:15px; background-color:orange;"></span>	6.1 - 8
<span style="display:inline-block; width:15px; height:15px; background-color:yellow;"></span>	8.1 - 10
<span style="display:inline-block; width:15px; height:15px; background-color:lightgreen;"></span>	10.1 - 12
<span style="display:inline-block; width:15px; height:15px; background-color:blue;"></span>	12.1 - 30

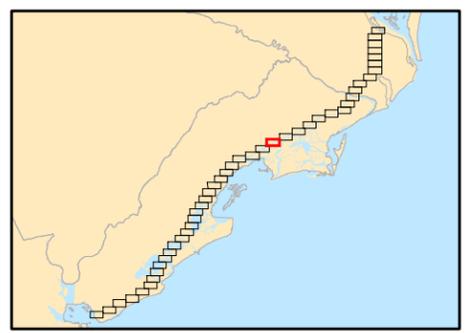


<b>Survey Area:</b> Atlantic Intracoastal Waterway - Winyah Bay to Charleston	
<b>Survey Date:</b>	2013-09
<b>Survey Crew:</b>	USACE Survey Team
<b>Survey File Name:</b>	20130900_ICW_WBC_MB_CS_ALL.xyz
<b>Imagery/Background:</b>	2011 NRCS NAIP
<b>Mapped By:</b>	

# AIWW W-C 20

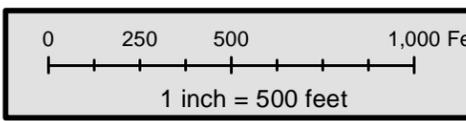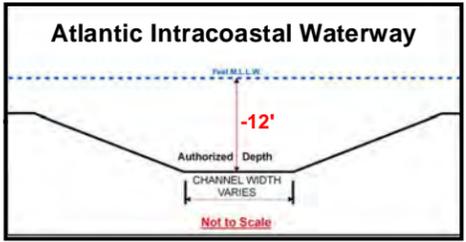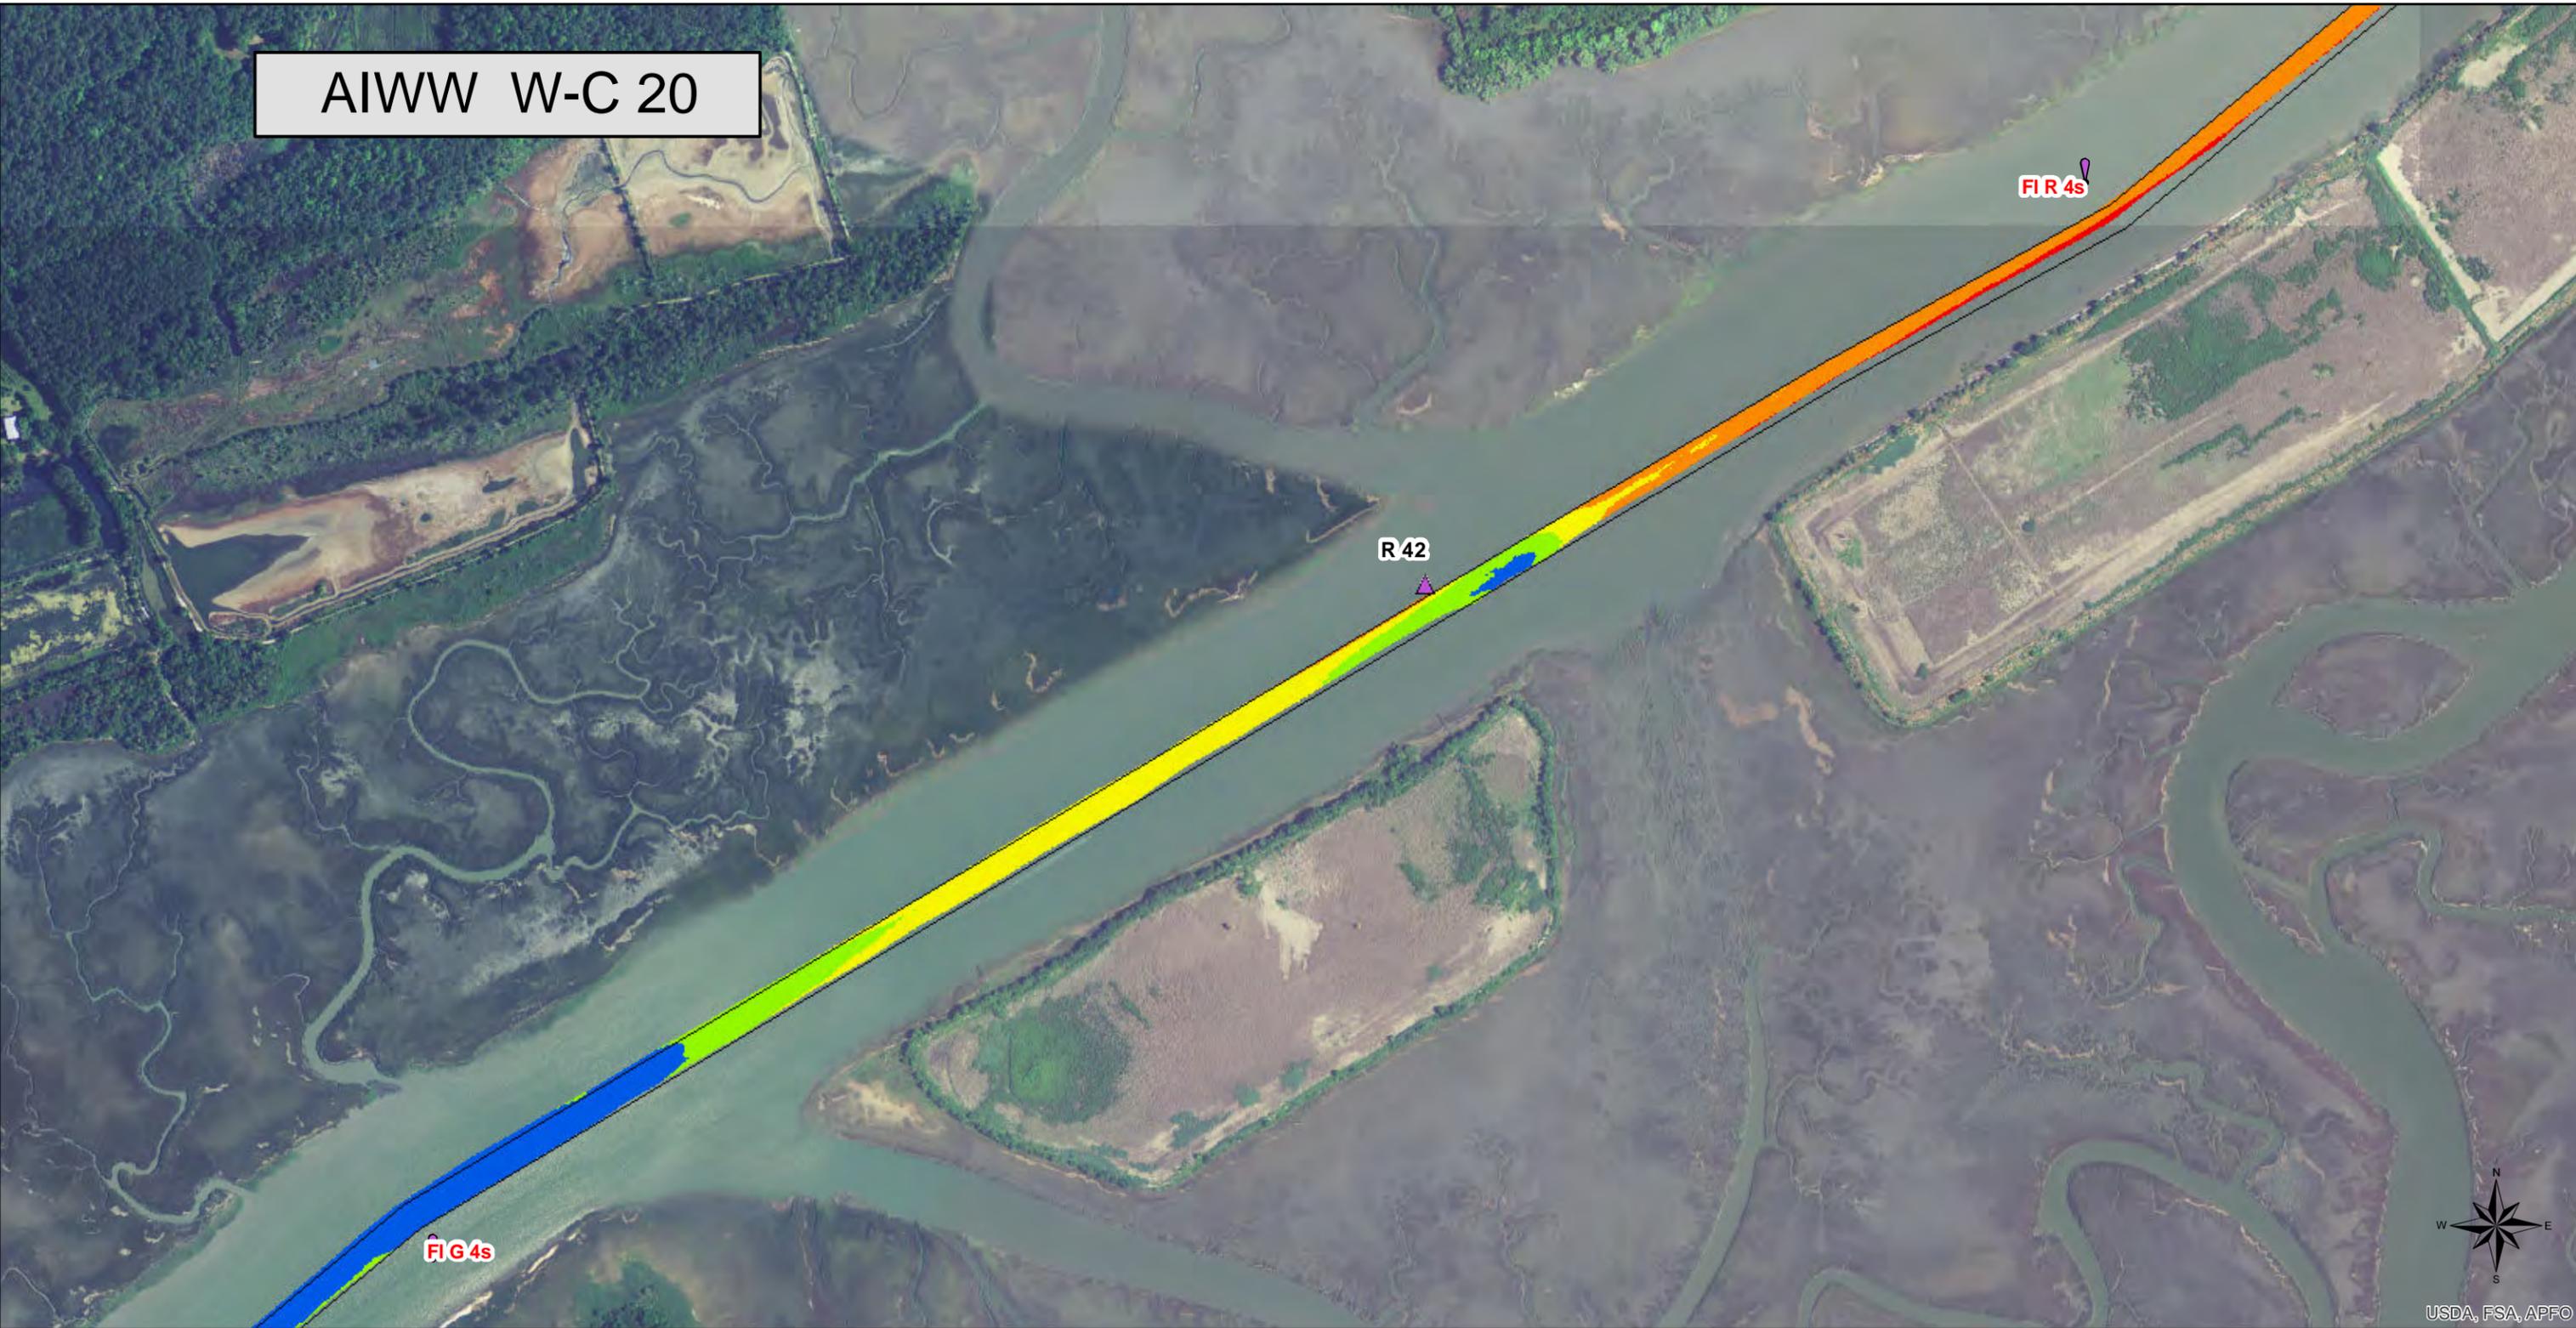

Notes:  
 - Soundings are expressed in positive feet and tenths and are referenced the Mean Lower Low Water (MLLW) datum  
 - Project surveyed with USACE survey vessels equipped with GPS positioning and hydrographic survey equipment that meets USACE Navigation and Dredging standards for soft bottom hydrographic surveys.  
 - Soundings are calibrated to tide gauges that are set to MLLW and referenced to published benchmarks  
 - Horizontal Datum: State Plane NAD-83 SC-3900 Intl Feet  
 - Project was designed by the Charleston District of the U.S. Army Corps of Engineers. The initials or signatures and registration designations of individuals appear on these project documents within the scope of their employment by ER 1110-1-8152  
 - Maps and associated information represents the result of surveys made on the date indicated and can only be considered as indicating the general condition existing at that time. These conditions are subject to rapid change due to shoaling events. A prudent mariner should not rely exclusively on the information provided here  
 - Aids to Navigation obtained from the U.S. Coast Guard Light List

Federal Channel	
Depth FT MLLW	
<span style="background-color: red; color: black;"> </span>	-0.6 - 6
<span style="background-color: orange; color: black;"> </span>	6.1 - 8
<span style="background-color: yellow; color: black;"> </span>	8.1 - 10
<span style="background-color: lightgreen; color: black;"> </span>	10.1 - 12
<span style="background-color: blue; color: black;"> </span>	12.1 - 30


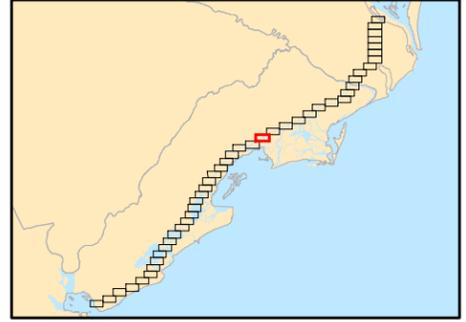


<b>Survey Area:</b> Atlantic Intracoastal Waterway - Winyah Bay to Charleston	
<b>Survey Date:</b>	2013-09
<b>Survey Crew:</b>	USACE Survey Team
<b>Survey File Name:</b>	20130900_ICW_WBC_MB_CS_ALL.xyz
<b>Imagery/Background:</b>	2011 NRCS NAIP
<b>Mapped By:</b>	

# AIWW W-C 21




USDA, FSA, APFO

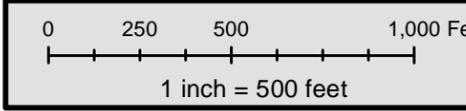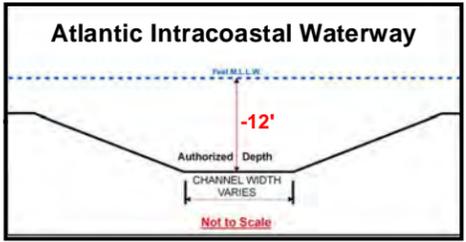

**Notes:**  
 - Soundings are expressed in positive feet and tenths and are referenced to the Mean Lower Low Water (MLLW) datum  
 - Project surveyed with USACE survey vessels equipped with GPS positioning and hydrographic survey equipment that meets USACE Navigation and Dredging standards for soft bottom hydrographic surveys.  
 - Soundings are calibrated to tide gauges that are set to MLLW and referenced to published benchmarks  
 - Horizontal Datum: State Plane NAD-83 SC-3900 Intl Feet  
 - Project was designed by the Charleston District of the U.S. Army Corps of Engineers. The initials or signatures and registration designations of individuals appear on these project documents within the scope of their employment by ER 1110-1-8152  
 - Maps and associated information represents the result of surveys made on the date indicated and can only be considered as indicating the general condition existing at that time. These conditions are subject to rapid change due to shoaling events. A prudent mariner should not rely exclusively on the information provided here  
 - Aids to Navigation obtained from the U.S. Coast Guard Light List

Federal Channel	
Depth FT MLLW	
<span style="display:inline-block; width:15px; height:15px; background-color:red;"></span>	-0.6 - 6
<span style="display:inline-block; width:15px; height:15px; background-color:orange;"></span>	6.1 - 8
<span style="display:inline-block; width:15px; height:15px; background-color:yellow;"></span>	8.1 - 10
<span style="display:inline-block; width:15px; height:15px; background-color:lightgreen;"></span>	10.1 - 12
<span style="display:inline-block; width:15px; height:15px; background-color:blue;"></span>	12.1 - 30


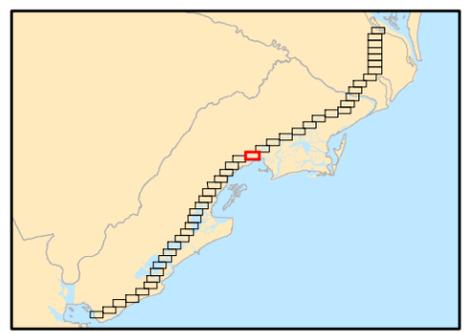


<b>Survey Area:</b> Atlantic Intracoastal Waterway - Winyah Bay to Charleston	
<b>Survey Date:</b>	2013-09
<b>Survey Crew:</b>	USACE Survey Team
<b>Survey File Name:</b>	20130900_ICW_WBC_MB_CS_ALL.xyz
<b>Imagery/Background:</b>	2011 NRCS NAIP
<b>Mapped By:</b>	

# AIWW W-C 22




USDA, FSA, APFO

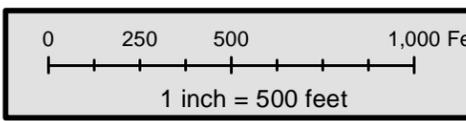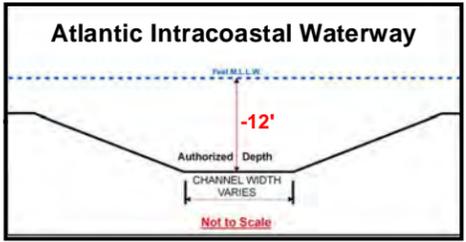

Notes:  
 - Soundings are expressed in positive feet and tenths and are referenced the Mean Lower Low Water (MLLW) datum  
 - Project surveyed with USACE survey vessels equipped with GPS positioning and hydrographic survey equipment that meets USACE Navigation and Dredging standards for soft bottom hydrographic surveys.  
 - Soundings are calibrated to tide gauges that are set to MLLW and referenced to published benchmarks  
 - Horizontal Datum: State Plane NAD-83 SC-3900 Intl Feet  
 - Project was designed by the Charleston District of the U.S. Army Corps of Engineers. The initials or signatures and registration designations of individuals appear on these project documents within the scope of their employment by ER 1110-1-8152  
 - Maps and associated information represents the result of surveys made on the date indicated and can only be considered as indicating the general condition existing at that time. These conditions are subject to rapid change due to shoaling events. A prudent mariner should not rely exclusively on the information provided here  
 - Aids to Navigation obtained from the U.S. Coast Guard Light List

Federal Channel	
Depth FT MLLW	
<span style="background-color: red; color: black;">■</span>	-0.6 - 6
<span style="background-color: orange; color: black;">■</span>	6.1 - 8
<span style="background-color: yellow; color: black;">■</span>	8.1 - 10
<span style="background-color: lightgreen; color: black;">■</span>	10.1 - 12
<span style="background-color: blue; color: black;">■</span>	12.1 - 30


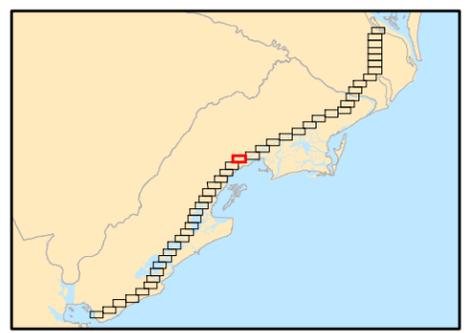


<b>Survey Area:</b> Atlantic Intracoastal Waterway - Winyah Bay to Charleston	
<b>Survey Date:</b>	2013-09
<b>Survey Crew:</b>	USACE Survey Team
<b>Survey File Name:</b>	20130900_ICW_WBC_MB_CS_ALL.xyz
<b>Imagery/Background:</b>	2011 NRCS NAIP
<b>Mapped By:</b>	

# AIWW W-C 23



USDA, FSA, APFO

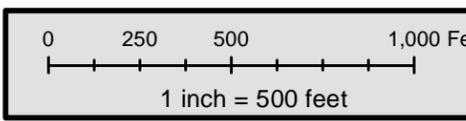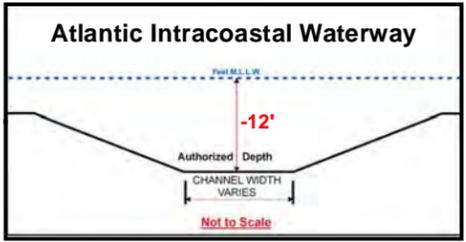

Notes:  
 - Soundings are expressed in positive feet and tenths and are referenced the Mean Lower Low Water (MLLW) datum  
 - Project surveyed with USACE survey vessels equipped with GPS positioning and hydrographic survey equipment that meets USACE Navigation and Dredging standards for soft bottom hydrographic surveys.  
 - Soundings are calibrated to tide gauges that are set to MLLW and referenced to published benchmarks  
 - Horizontal Datum: State Plane NAD-83 SC-3900 Intl Feet  
 - Project was designed by the Charleston District of the U.S. Army Corps of Engineers. The initials or signatures and registration designations of individuals appear on these project documents within the scope of their employment by ER 1110-1-8152  
 - Maps and associated information represents the result of surveys made on the date indicated and can only be considered as indicating the general condition existing at that time. These conditions are subject to rapid change due to shoaling events. A prudent mariner should not rely exclusively on the information provided here  
 - Aids to Navigation obtained from the U.S. Coast Guard Light List

Federal Channel	
Depth FT MLLW	
<span style="display:inline-block; width:15px; height:15px; background-color:red;"></span>	-0.6 - 6
<span style="display:inline-block; width:15px; height:15px; background-color:orange;"></span>	6.1 - 8
<span style="display:inline-block; width:15px; height:15px; background-color:yellow;"></span>	8.1 - 10
<span style="display:inline-block; width:15px; height:15px; background-color:lightgreen;"></span>	10.1 - 12
<span style="display:inline-block; width:15px; height:15px; background-color:darkgreen;"></span>	12.1 - 30





Survey Area: Atlantic Intracoastal Waterway - Winyah Bay to Charleston	
Survey Date:	2013-09
Survey Crew:	USACE Survey Team
Survey File Name:	20130900_ICW_WBC_MB_CS_ALL.xyz
Imagery/Background:	2011 NRCS NAIP
Mapped By:	

# AIWW W-C 24




USDA, FSA, APFO

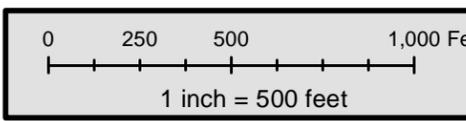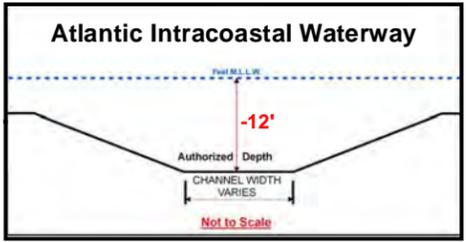



Notes:  
 - Soundings are expressed in positive feet and tenths and are referenced the Mean Lower Low Water (MLLW) datum  
 - Project surveyed with USACE survey vessels equipped with GPS positioning and hydrographic survey equipment that meets USACE Navigation and Dredging standards for soft bottom hydrographic surveys.  
 - Soundings are calibrated to tide gauges that are set to MLLW and referenced to published benchmarks  
 - Horizontal Datum: State Plane NAD-83 SC-3900 Intl Feet  
 - Project was designed by the Charleston District of the U.S. Army Corps of Engineers. The initials or signatures and registration designations of individuals appear on these project documents within the scope of their employment by ER 1110-1-8152  
 - Maps and associated information represents the result of surveys made on the date indicated and can only be considered as indicating the general condition existing at that time. These conditions are subject to rapid change due to shoaling events. A prudent mariner should not rely exclusively on the information provided here  
 - Aids to Navigation obtained from the U.S. Coast Guard Light List

Federal Channel	
Depth FT MLLW	
<span style="display:inline-block; width:15px; height:10px; background-color:red;"></span>	-0.6 - 6
<span style="display:inline-block; width:15px; height:10px; background-color:orange;"></span>	6.1 - 8
<span style="display:inline-block; width:15px; height:10px; background-color:yellow;"></span>	8.1 - 10
<span style="display:inline-block; width:15px; height:10px; background-color:lightgreen;"></span>	10.1 - 12
<span style="display:inline-block; width:15px; height:10px; background-color:darkblue;"></span>	12.1 - 30

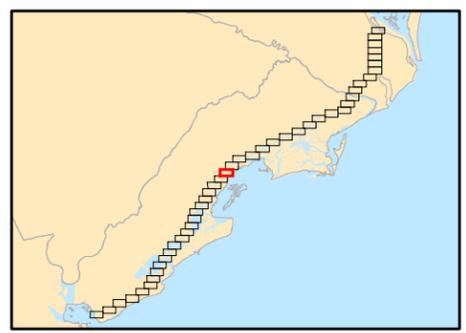


Survey Area: Atlantic Intracoastal Waterway - Winyah Bay to Charleston	
Survey Date:	2013-09
Survey Crew:	USACE Survey Team
Survey File Name:	20130900_ICW_WBC_MB_CS_ALL.xyz
Imagery/Background:	2011 NRCS NAIP
Mapped By:	

# AIWW W-C 25

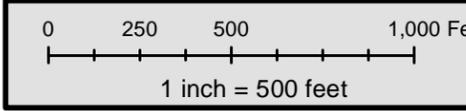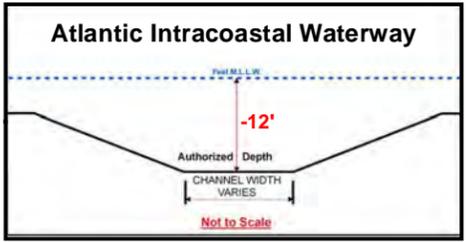



Notes:  
 - Soundings are expressed in positive feet and tenths and are referenced the Mean Lower Low Water (MLLW) datum  
 - Project surveyed with USACE survey vessels equipped with GPS positioning and hydrographic survey equipment that meets USACE Navigation and Dredging standards for soft bottom hydrographic surveys.  
 - Soundings are calibrated to tide gauges that are set to MLLW and referenced to published benchmarks  
 - Horizontal Datum: State Plane NAD-83 SC-3900 Intl Feet  
 - Project was designed by the Charleston District of the U.S. Army Corps of Engineers. The initials or signatures and registration designations of individuals appear on these project documents within the scope of their employment by ER 1110-1-8152  
 - Maps and associated information represents the result of surveys made on the date indicated and can only be considered as indicating the general condition existing at that time. These conditions are subject to rapid change due to shoaling events. A prudent mariner should not rely exclusively on the information provided here  
 - Aids to Navigation obtained from the U.S. Coast Guard Light List

Federal Channel	
Depth FT MLLW	
<span style="display:inline-block; width:15px; height:15px; background-color:red;"></span>	0.6 - 6
<span style="display:inline-block; width:15px; height:15px; background-color:orange;"></span>	6.1 - 8
<span style="display:inline-block; width:15px; height:15px; background-color:yellow;"></span>	8.1 - 10
<span style="display:inline-block; width:15px; height:15px; background-color:lightgreen;"></span>	10.1 - 12
<span style="display:inline-block; width:15px; height:15px; background-color:blue;"></span>	12.1 - 30

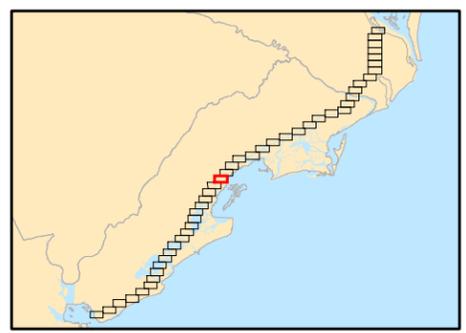


Survey Area: Atlantic Intracoastal Waterway - Winyah Bay to Charleston	
Survey Date:	2013-09
Survey Crew:	USACE Survey Team
Survey File Name:	20130900_ICW_WBC_MB_CS_ALL.xyz
Imagery/Background:	2011 NRCS NAIP
Mapped By:	

# AIWW W-C 26

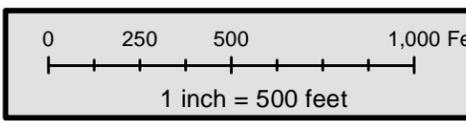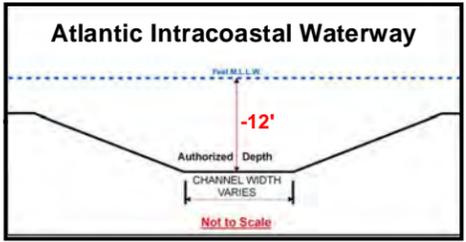

Notes:  
 - Soundings are expressed in positive feet and tenths and are referenced the Mean Lower Low Water (MLLW) datum  
 - Project surveyed with USACE survey vessels equipped with GPS positioning and hydrographic survey equipment that meets USACE Navigation and Dredging standards for soft bottom hydrographic surveys.  
 - Soundings are calibrated to tide gauges that are set to MLLW and referenced to published benchmarks  
 - Horizontal Datum: State Plane NAD-83 SC-3900 Intl Feet  
 - Project was designed by the Charleston District of the U.S. Army Corps of Engineers. The initials or signatures and registration designations of individuals appear on these project documents within the scope of their employment by ER 1110-1-8152  
 - Maps and associated information represents the result of surveys made on the date indicated and can only be considered as indicating the general condition existing at that time. These conditions are subject to rapid change due to shoaling events. A prudent mariner should not rely exclusively on the information provided here  
 - Aids to Navigation obtained from the U.S. Coast Guard Light List

Federal Channel	
Depth FT MLLW	
<span style="display:inline-block; width:15px; height:15px; background-color:red;"></span>	-0.6 - 6
<span style="display:inline-block; width:15px; height:15px; background-color:orange;"></span>	6.1 - 8
<span style="display:inline-block; width:15px; height:15px; background-color:yellow;"></span>	8.1 - 10
<span style="display:inline-block; width:15px; height:15px; background-color:lightgreen;"></span>	10.1 - 12
<span style="display:inline-block; width:15px; height:15px; background-color:blue;"></span>	12.1 - 30


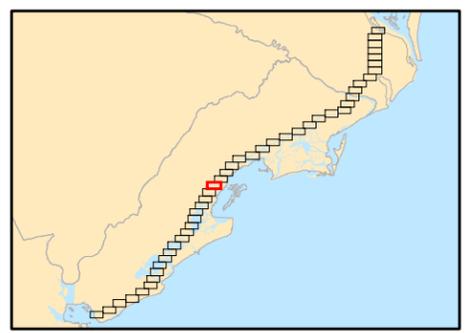


Survey Area: Atlantic Intracoastal Waterway - Winyah Bay to Charleston	
Survey Date:	2013-09
Survey Crew:	USACE Survey Team
Survey File Name:	20130900_ICW_WBC_MB_CS_ALL.xyz
Imagery/Background:	2011 NRCS NAIP
Mapped By:	

# AIWW W-C 27




USDA, FSA, APFO

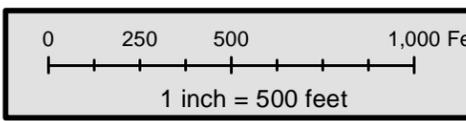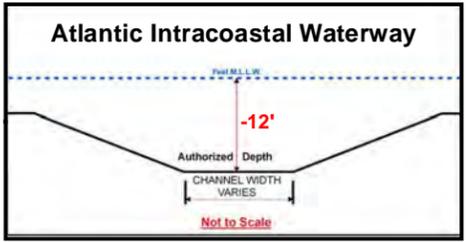

Notes:  
 - Soundings are expressed in positive feet and tenths and are referenced the Mean Lower Low Water (MLLW) datum  
 - Project surveyed with USACE survey vessels equipped with GPS positioning and hydrographic survey equipment that meets USACE Navigation and Dredging standards for soft bottom hydrographic surveys.  
 - Soundings are calibrated to tide gauges that are set to MLLW and referenced to published benchmarks  
 - Horizontal Datum: State Plane NAD-83 SC-3900 Intl Feet  
 - Project was designed by the Charleston District of the U.S. Army Corps of Engineers. The initials or signatures and registration designations of individuals appear on these project documents within the scope of their employment by ER 1110-1-8152  
 - Maps and associated information represents the result of surveys made on the date indicated and can only be considered as indicating the general condition existing at that time. These conditions are subject to rapid change due to shoaling events. A prudent mariner should not rely exclusively on the information provided here  
 - Aids to Navigation obtained from the U.S. Coast Guard Light List

Federal Channel	
Depth FT MLLW	
<span style="display:inline-block; width:15px; height:15px; background-color:red;"></span>	0.6 - 6
<span style="display:inline-block; width:15px; height:15px; background-color:orange;"></span>	6.1 - 8
<span style="display:inline-block; width:15px; height:15px; background-color:yellow;"></span>	8.1 - 10
<span style="display:inline-block; width:15px; height:15px; background-color:lightgreen;"></span>	10.1 - 12
<span style="display:inline-block; width:15px; height:15px; background-color:blue;"></span>	12.1 - 30

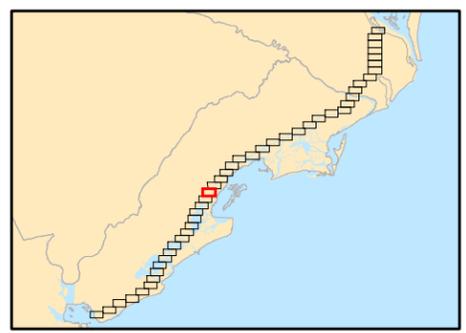

**US Army Corps  
Of Engineers®  
Charleston District**

Survey Area: Atlantic Intracoastal Waterway - Winyah Bay to Charleston	
Survey Date:	2013-09
Survey Crew:	USACE Survey Team
Survey File Name:	20130900_ICW_WBC_MB_CS_ALL.xyz
Imagery/Background:	2011 NRCS NAIP
Mapped By:	



# AIWW W-C 28



USDA, FSA, APFO



## Atlantic Intracoastal Waterway

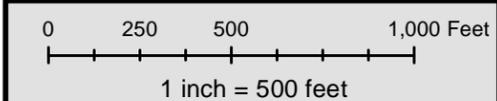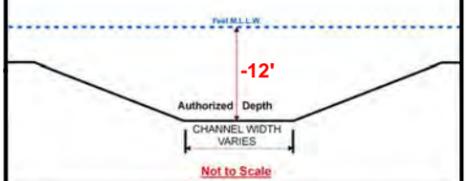

**Notes:**  
 - Soundings are expressed in positive feet and tenths and are referenced the Mean Lower Low Water (MLLW) datum  
 - Project surveyed with USACE survey vessels equipped with GPS positioning and hydrographic survey equipment that meets USACE Navigation and Dredging standards for soft bottom hydrographic surveys.  
 - Soundings are calibrated to tide gauges that are set to MLLW and referenced to published benchmarks  
 - Horizontal Datum: State Plane NAD-83 SC-3900 Intl Feet  
 - Project was designed by the Charleston District of the U.S. Army Corps of Engineers. The initials or signatures and registration designations of individuals appear on these project documents within the scope of their employment by ER 1110-1-8152  
 - Maps and associated information represents the result of surveys made on the date indicated and can only be considered as indicating the general condition existing at that time. These conditions are subject to rapid change due to shoaling events. A prudent mariner should not rely exclusively on the information provided here  
 - Aids to Navigation obtained from the U.S. Coast Guard Light List

Federal Channel	
Depth FT MLLW	
<span style="background-color: red; color: black;"> </span>	-0.6 - 6
<span style="background-color: orange; color: black;"> </span>	6.1 - 8
<span style="background-color: yellow; color: black;"> </span>	8.1 - 10
<span style="background-color: limegreen; color: black;"> </span>	10.1 - 12
<span style="background-color: blue; color: black;"> </span>	12.1 - 30





Survey Area: Atlantic Intracoastal Waterway - Winyah Bay to Charleston	
Survey Date:	2013-09
Survey Crew:	USACE Survey Team
Survey File Name:	20130900_ICW_WBC_MB_CS_ALL.xyz
Imagery/Background:	2011 NRCS NAIP
Mapped By:	

# AIWW W-C 29




USDA, FSA, APFO

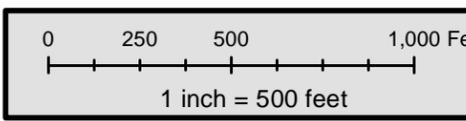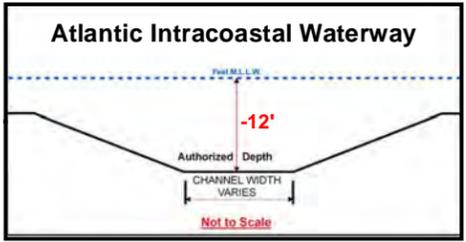



**Notes:**  
 - Soundings are expressed in positive feet and tenths and are referenced the Mean Lower Low Water (MLLW) datum  
 - Project surveyed with USACE survey vessels equipped with GPS positioning and hydrographic survey equipment that meets USACE Navigation and Dredging standards for soft bottom hydrographic surveys.  
 - Soundings are calibrated to tide gauges that are set to MLLW and referenced to published benchmarks  
 - Horizontal Datum: State Plane NAD-83 SC-3900 Intl Feet  
 - Project was designed by the Charleston District of the U.S. Army Corps of Engineers. The initials or signatures and registration designations of individuals appear on these project documents within the scope of their employment by ER 1110-1-8152  
 - Maps and associated information represents the result of surveys made on the date indicated and can only be considered as indicating the general condition existing at that time. These conditions are subject to rapid change due to shoaling events. A prudent mariner should not rely exclusively on the information provided here  
 - Aids to Navigation obtained from the U.S. Coast Guard Light List

Federal Channel	
Depth FT MLLW	
<span style="display:inline-block; width:15px; height:15px; background-color:red;"></span>	-0.6 - 6
<span style="display:inline-block; width:15px; height:15px; background-color:orange;"></span>	6.1 - 8
<span style="display:inline-block; width:15px; height:15px; background-color:yellow;"></span>	8.1 - 10
<span style="display:inline-block; width:15px; height:15px; background-color:lightgreen;"></span>	10.1 - 12
<span style="display:inline-block; width:15px; height:15px; background-color:blue;"></span>	12.1 - 30

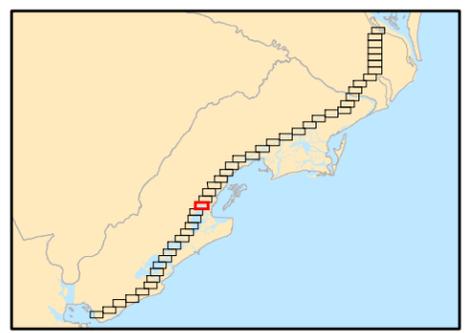

Survey Area: Atlantic Intracoastal Waterway - Winyah Bay to Charleston	
Survey Date:	2013-09
Survey Crew:	USACE Survey Team
Survey File Name:	20130900_ICW_WBC_MB_CS_ALL.xyz
Imagery/Background:	2011 NRCS NAIP
Mapped By:	

# AIWW W-C 30

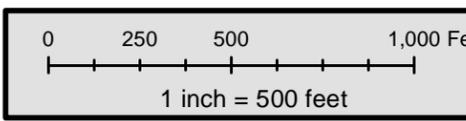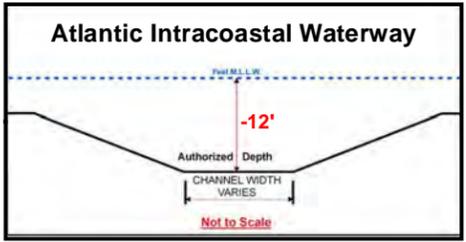


Notes:  
 - Soundings are expressed in positive feet and tenths and are referenced to the Mean Lower Low Water (MLLW) datum  
 - Project surveyed with USACE survey vessels equipped with GPS positioning and hydrographic survey equipment that meets USACE Navigation and Dredging standards for soft bottom hydrographic surveys.  
 - Soundings are calibrated to tide gauges that are set to MLLW and referenced to published benchmarks  
 - Horizontal Datum: State Plane NAD-83 SC-3900 Intl Feet  
 - Project was designed by the Charleston District of the U.S. Army Corps of Engineers. The initials or signatures and registration designations of individuals appear on these project documents within the scope of their employment by ER 1110-1-8152  
 - Maps and associated information represents the result of surveys made on the date indicated and can only be considered as indicating the general condition existing at that time. These conditions are subject to rapid change due to shoaling events. A prudent mariner should not rely exclusively on the information provided here  
 - Aids to Navigation obtained from the U.S. Coast Guard Light List

Federal Channel	
Depth FT MLLW	
<span style="display:inline-block; width:15px; height:15px; background-color:red;"></span>	0.6 - 6
<span style="display:inline-block; width:15px; height:15px; background-color:orange;"></span>	6.1 - 8
<span style="display:inline-block; width:15px; height:15px; background-color:yellow;"></span>	8.1 - 10
<span style="display:inline-block; width:15px; height:15px; background-color:lightgreen;"></span>	10.1 - 12
<span style="display:inline-block; width:15px; height:15px; background-color:blue;"></span>	12.1 - 30





Survey Area: Atlantic Intracoastal Waterway - Winyah Bay to Charleston	
Survey Date:	2013-09
Survey Crew:	USACE Survey Team
Survey File Name:	20130900_ICW_WBC_MB_CS_ALL.xyz
Imagery/Background:	2011 NRCS NAIP
Mapped By:	

# AIWW W-C 31

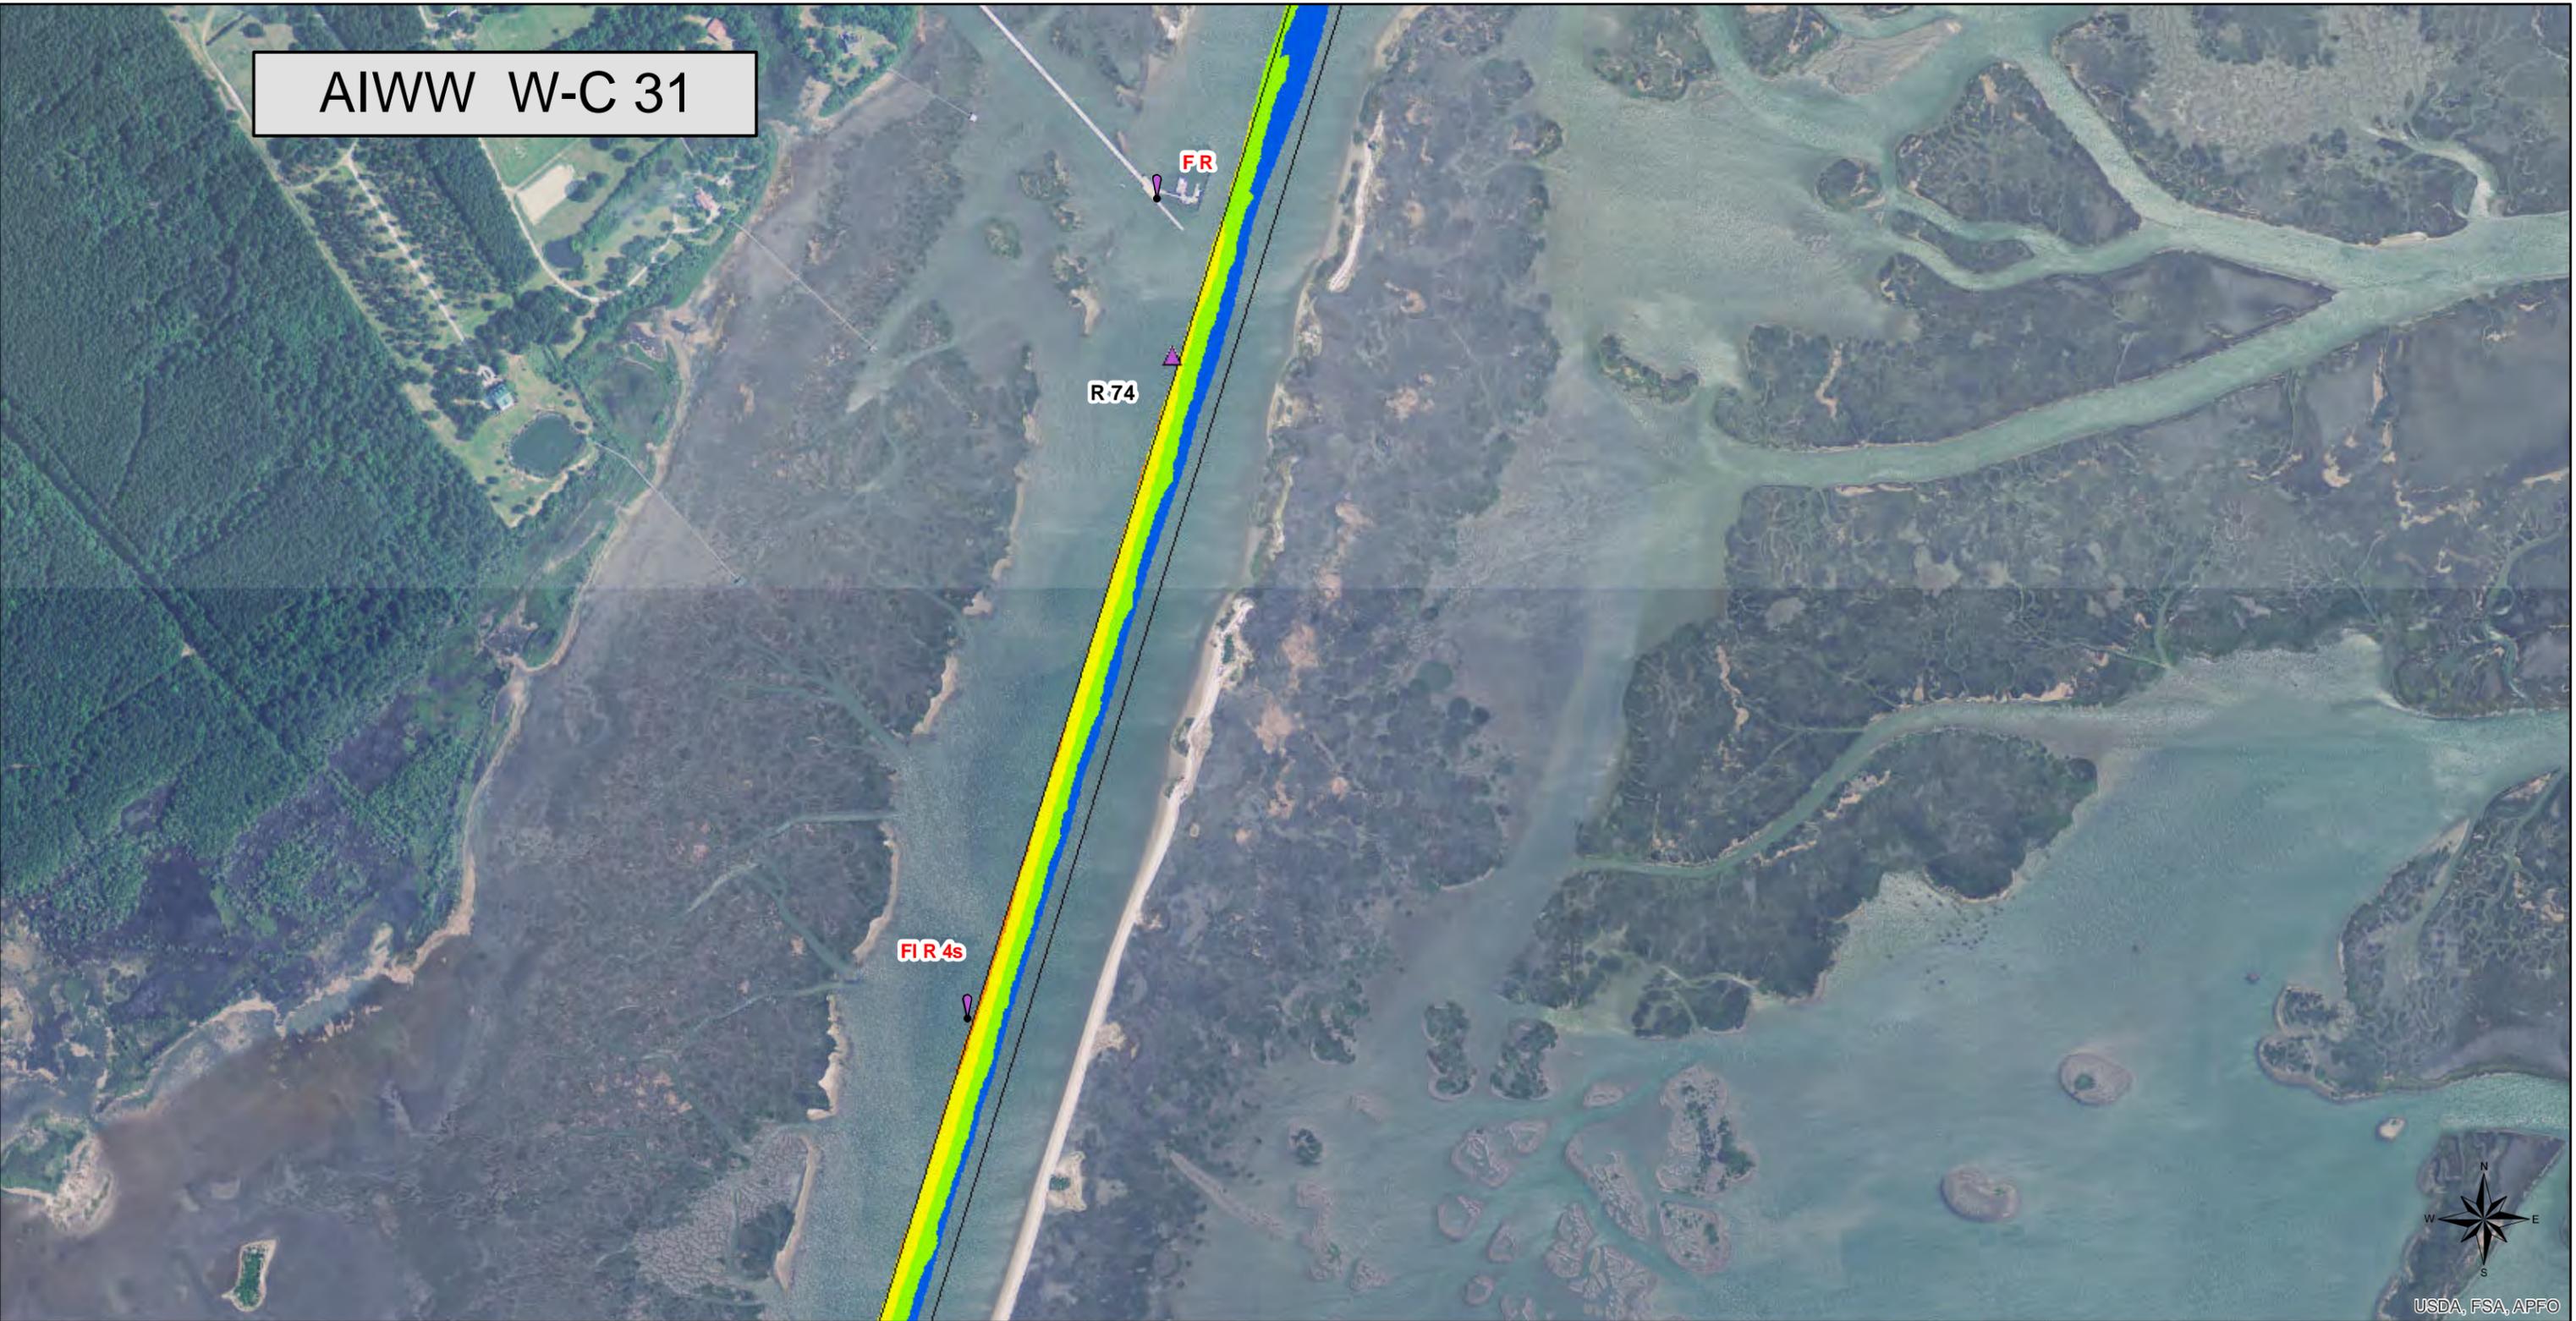


USDA, FSA, APFO

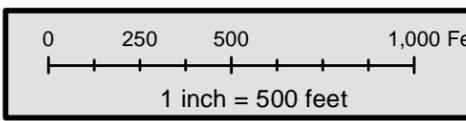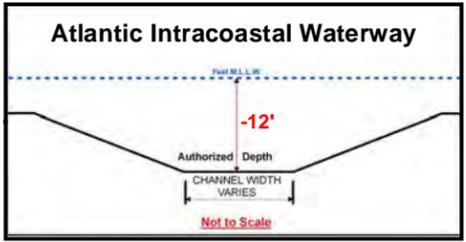

**Notes:**  
 - Soundings are expressed in positive feet and tenths and are referenced the Mean Lower Low Water (MLLW) datum  
 - Project surveyed with USACE survey vessels equipped with GPS positioning and hydrographic survey equipment that meets USACE Navigation and Dredging standards for soft bottom hydrographic surveys.  
 - Soundings are calibrated to tide gauges that are set to MLLW and referenced to published benchmarks  
 - Horizontal Datum: State Plane NAD-83 SC-3900 Intl Feet  
 - Project was designed by the Charleston District of the U.S. Army Corps of Engineers. The initials or signatures and registration designations of individuals appear on these project documents within the scope of their employment by ER 1110-1-8152  
 - Maps and associated information represents the result of surveys made on the date indicated and can only be considered as indicating the general condition existing at that time. These conditions are subject to rapid change due to shoaling events. A prudent mariner should not rely exclusively on the information provided here  
 - Aids to Navigation obtained from the U.S. Coast Guard Light List

Federal Channel	
Depth FT MLLW	
<span style="display:inline-block; width:15px; height:15px; background-color:red;"></span>	-0.6 - 6
<span style="display:inline-block; width:15px; height:15px; background-color:orange;"></span>	6.1 - 8
<span style="display:inline-block; width:15px; height:15px; background-color:yellow;"></span>	8.1 - 10
<span style="display:inline-block; width:15px; height:15px; background-color:lightgreen;"></span>	10.1 - 12
<span style="display:inline-block; width:15px; height:15px; background-color:blue;"></span>	12.1 - 30


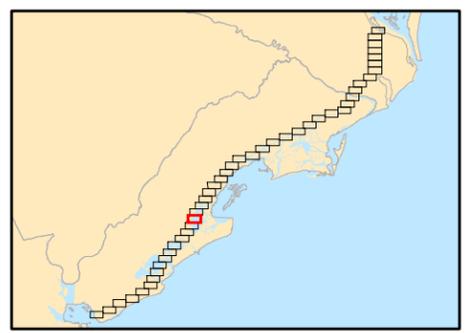


<b>Survey Area:</b> Atlantic Intracoastal Waterway - Winyah Bay to Charleston	
<b>Survey Date:</b>	2013-09
<b>Survey Crew:</b>	USACE Survey Team
<b>Survey File Name:</b>	20130900_ICW_WBC_MB_CS_ALL.xyz
<b>Imagery/Background:</b>	2011 NRCS NAIP
<b>Mapped By:</b>	

# AIWW W-C 32




USDA, FSA, APFO

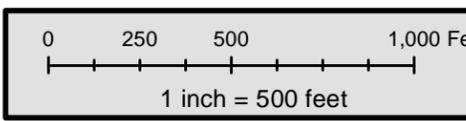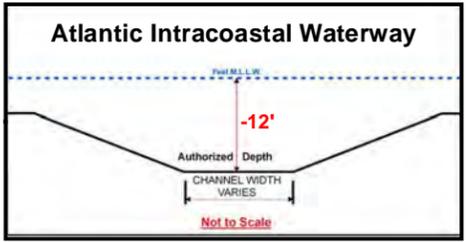



Notes:  
 - Soundings are expressed in positive feet and tenths and are referenced the Mean Lower Low Water (MLLW) datum  
 - Project surveyed with USACE survey vessels equipped with GPS positioning and hydrographic survey equipment that meets USACE Navigation and Dredging standards for soft bottom hydrographic surveys.  
 - Soundings are calibrated to tide gauges that are set to MLLW and referenced to published benchmarks  
 - Horizontal Datum: State Plane NAD-83 SC-3900 Intl Feet  
 - Project was designed by the Charleston District of the U.S. Army Corps of Engineers. The initials or signatures and registration designations of individuals appear on these project documents within the scope of their employment by ER 1110-1-8152  
 - Maps and associated information represents the result of surveys made on the date indicated and can only be considered as indicating the general condition existing at that time. These conditions are subject to rapid change due to shoaling events. A prudent mariner should not rely exclusively on the information provided here  
 - Aids to Navigation obtained from the U.S. Coast Guard Light List

Federal Channel	
Depth FT MLLW	
<span style="display:inline-block; width:15px; height:15px; background-color:red;"></span>	-0.6 - 6
<span style="display:inline-block; width:15px; height:15px; background-color:orange;"></span>	6.1 - 8
<span style="display:inline-block; width:15px; height:15px; background-color:yellow;"></span>	8.1 - 10
<span style="display:inline-block; width:15px; height:15px; background-color:lightgreen;"></span>	10.1 - 12
<span style="display:inline-block; width:15px; height:15px; background-color:blue;"></span>	12.1 - 30

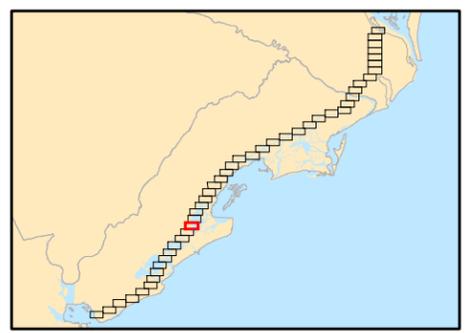


<b>Survey Area:</b> Atlantic Intracoastal Waterway - Winyah Bay to Charleston	
<b>Survey Date:</b>	2013-09
<b>Survey Crew:</b>	USACE Survey Team
<b>Survey File Name:</b>	20130900_ICW_WBC_MB_CS_ALL.xyz
<b>Imagery/Background:</b>	2011 NRCS NAIP
<b>Mapped By:</b>	

# AIWW W-C 33

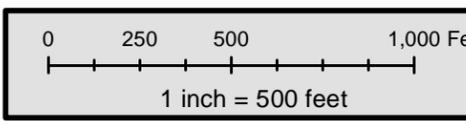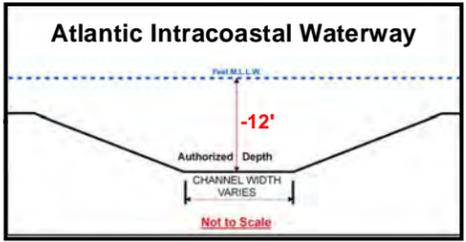



Notes:  
 - Soundings are expressed in positive feet and tenths and are referenced the Mean Lower Low Water (MLLW) datum  
 - Project surveyed with USACE survey vessels equipped with GPS positioning and hydrographic survey equipment that meets USACE Navigation and Dredging standards for soft bottom hydrographic surveys.  
 - Soundings are calibrated to tide gauges that are set to MLLW and referenced to published benchmarks  
 - Horizontal Datum: State Plane NAD-83 SC-3900 Intl Feet  
 - Project was designed by the Charleston District of the U.S. Army Corps of Engineers. The initials or signatures and registration designations of individuals appear on these project documents within the scope of their employment by ER 1110-1-8152  
 - Maps and associated information represents the result of surveys made on the date indicated and can only be considered as indicating the general condition existing at that time. These conditions are subject to rapid change due to shoaling events. A prudent mariner should not rely exclusively on the information provided here  
 - Aids to Navigation obtained from the U.S. Coast Guard Light List

Federal Channel	
Depth FT MLLW	
<span style="display:inline-block; width:15px; height:15px; background-color:red;"></span>	-0.6 - 6
<span style="display:inline-block; width:15px; height:15px; background-color:orange;"></span>	6.1 - 8
<span style="display:inline-block; width:15px; height:15px; background-color:yellow;"></span>	8.1 - 10
<span style="display:inline-block; width:15px; height:15px; background-color:lightgreen;"></span>	10.1 - 12
<span style="display:inline-block; width:15px; height:15px; background-color:blue;"></span>	12.1 - 30

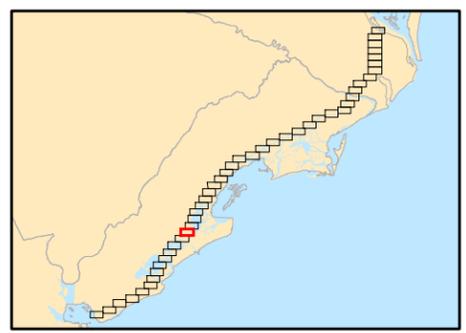


Survey Area: Atlantic Intracoastal Waterway - Winyah Bay to Charleston	
Survey Date:	2013-09
Survey Crew:	USACE Survey Team
Survey File Name:	20130900_ICW_WBC_MB_CS_ALL.xyz
Imagery/Background:	2011 NRCS NAIP
Mapped By:	

# AIWW W-C 34

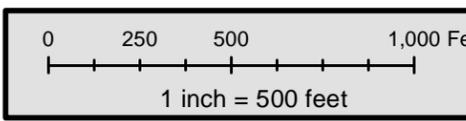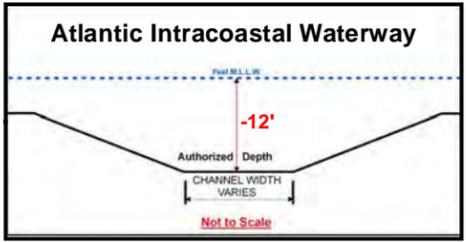

Notes:  
 - Soundings are expressed in positive feet and tenths and are referenced the Mean Lower Low Water (MLLW) datum  
 - Project surveyed with USACE survey vessels equipped with GPS positioning and hydrographic survey equipment that meets USACE Navigation and Dredging standards for soft bottom hydrographic surveys.  
 - Soundings are calibrated to tide gauges that are set to MLLW and referenced to published benchmarks  
 - Horizontal Datum: State Plane NAD-83 SC-3900 Intl Feet  
 - Project was designed by the Charleston District of the U.S. Army Corps of Engineers. The initials or signatures and registration designations of individuals appear on these project documents within the scope of their employment by ER 1110-1-8152  
 - Maps and associated information represents the result of surveys made on the date indicated and can only be considered as indicating the general condition existing at that time. These conditions are subject to rapid change due to shoaling events. A prudent mariner should not rely exclusively on the information provided here  
 - Aids to Navigation obtained from the U.S. Coast Guard Light List

Federal Channel	
Depth FT MLLW	
<span style="display:inline-block; width:15px; height:15px; background-color:red;"></span>	-0.6 - 6
<span style="display:inline-block; width:15px; height:15px; background-color:orange;"></span>	6.1 - 8
<span style="display:inline-block; width:15px; height:15px; background-color:yellow;"></span>	8.1 - 10
<span style="display:inline-block; width:15px; height:15px; background-color:lightgreen;"></span>	10.1 - 12
<span style="display:inline-block; width:15px; height:15px; background-color:blue;"></span>	12.1 - 30


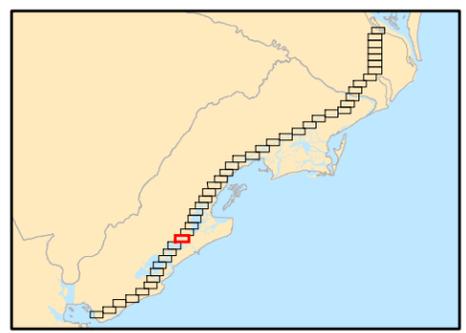


<b>Survey Area:</b> Atlantic Intracoastal Waterway - Winyah Bay to Charleston	
<b>Survey Date:</b>	2013-09
<b>Survey Crew:</b>	USACE Survey Team
<b>Survey File Name:</b>	20130900_ICW_WBC_MB_CS_ALL.xyz
<b>Imagery/Background:</b>	2011 NRCS NAIP
<b>Mapped By:</b>	

# AIWW W-C 35




USDA, FSA, APFO

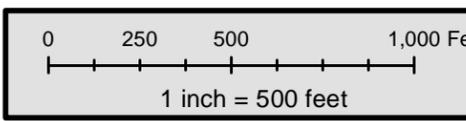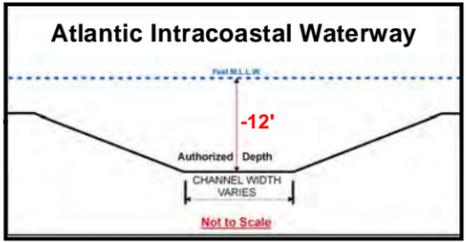

Notes:  
 - Soundings are expressed in positive feet and tenths and are referenced the Mean Lower Low Water (MLLW) datum  
 - Project surveyed with USACE survey vessels equipped with GPS positioning and hydrographic survey equipment that meets USACE Navigation and Dredging standards for soft bottom hydrographic surveys.  
 - Soundings are calibrated to tide gauges that are set to MLLW and referenced to published benchmarks  
 - Horizontal Datum: State Plane NAD-83 SC-3900 Intl Feet  
 - Project was designed by the Charleston District of the U.S. Army Corps of Engineers. The initials or signatures and registration designations of individuals appear on these project documents within the scope of their employment by ER 1110-1-8152  
 - Maps and associated information represents the result of surveys made on the date indicated and can only be considered as indicating the general condition existing at that time. These conditions are subject to rapid change due to shoaling events. A prudent mariner should not rely exclusively on the information provided here  
 - Aids to Navigation obtained from the U.S. Coast Guard Light List

Federal Channel	
Depth FT MLLW	
<span style="display:inline-block; width:15px; height:15px; background-color:red;"></span>	-0.6 - 6
<span style="display:inline-block; width:15px; height:15px; background-color:orange;"></span>	6.1 - 8
<span style="display:inline-block; width:15px; height:15px; background-color:yellow;"></span>	8.1 - 10
<span style="display:inline-block; width:15px; height:15px; background-color:lightgreen;"></span>	10.1 - 12
<span style="display:inline-block; width:15px; height:15px; background-color:blue;"></span>	12.1 - 30


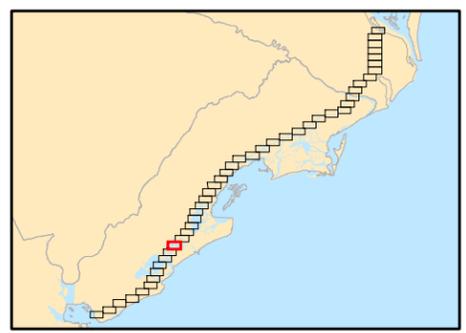


<b>Survey Area:</b> Atlantic Intracoastal Waterway - Winyah Bay to Charleston	
<b>Survey Date:</b>	2013-09
<b>Survey Crew:</b>	USACE Survey Team
<b>Survey File Name:</b>	20130900_ICW_WBC_MB_CS_ALL.xyz
<b>Imagery/Background:</b>	2011 NRCS NAIP
<b>Mapped By:</b>	

# AIWW W-C 36




USDA, FSA, APFO

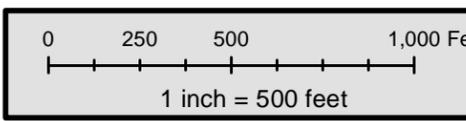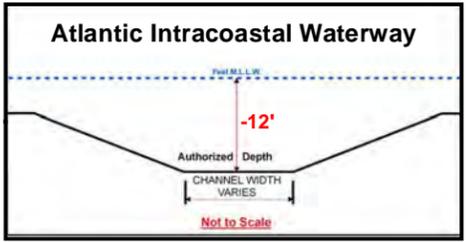



Notes:  
 - Soundings are expressed in positive feet and tenths and are referenced the Mean Lower Low Water (MLLW) datum  
 - Project surveyed with USACE survey vessels equipped with GPS positioning and hydrographic survey equipment that meets USACE Navigation and Dredging standards for soft bottom hydrographic surveys.  
 - Soundings are calibrated to tide gauges that are set to MLLW and referenced to published benchmarks  
 - Horizontal Datum: State Plane NAD-83 SC-3900 Intl Feet  
 - Project was designed by the Charleston District of the U.S. Army Corps of Engineers. The initials or signatures and registration designations of individuals appear on these project documents within the scope of their employment by ER 1110-1-8152  
 - Maps and associated information represents the result of surveys made on the date indicated and can only be considered as indicating the general condition existing at that time. These conditions are subject to rapid change due to shoaling events. A prudent mariner should not rely exclusively on the information provided here  
 - Aids to Navigation obtained from the U.S. Coast Guard Light List

Federal Channel	
Depth FT MLLW	
<span style="display:inline-block; width:15px; height:15px; background-color:red;"></span>	-0.6 - 6
<span style="display:inline-block; width:15px; height:15px; background-color:orange;"></span>	6.1 - 8
<span style="display:inline-block; width:15px; height:15px; background-color:yellow;"></span>	8.1 - 10
<span style="display:inline-block; width:15px; height:15px; background-color:lightgreen;"></span>	10.1 - 12
<span style="display:inline-block; width:15px; height:15px; background-color:blue;"></span>	12.1 - 30

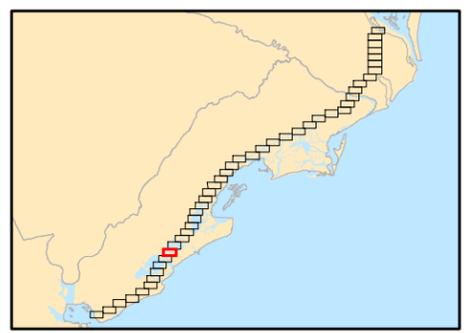

<b>Survey Area:</b> Atlantic Intracoastal Waterway - Winyah Bay to Charleston	
<b>Survey Date:</b>	2013-09
<b>Survey Crew:</b>	USACE Survey Team
<b>Survey File Name:</b>	20130900_ICW_WBC_MB_CS_ALL.xyz
<b>Imagery/Background:</b>	2011 NRCS NAIP
<b>Mapped By:</b>	


# AIWW W-C 37

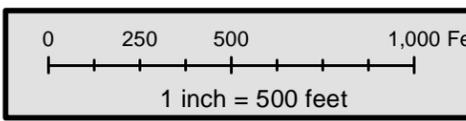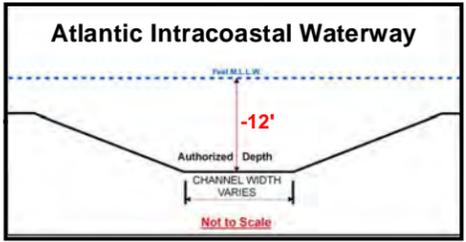

**Notes:**

- Soundings are expressed in positive feet and tenths and are referenced to the Mean Lower Low Water (MLLW) datum
- Project surveyed with USACE survey vessels equipped with GPS positioning and hydrographic survey equipment that meets USACE Navigation and Dredging standards for soft bottom hydrographic surveys.
- Soundings are calibrated to tide gauges that are set to MLLW and referenced to published benchmarks
- Horizontal Datum: State Plane NAD-83 SC-3900 Intl Feet
- Project was designed by the Charleston District of the U.S. Army Corps of Engineers. The initials or signatures and registration designations of individuals appear on these project documents within the scope of their employment by ER 1110-1-8152
- Maps and associated information represents the result of surveys made on the date indicated and can only be considered as indicating the general condition existing at that time. These conditions are subject to rapid change due to shoaling events. A prudent mariner should not rely exclusively on the information provided here
- Aids to Navigation obtained from the U.S. Coast Guard Light List

Federal Channel	
Depth FT MLLW	
<span style="display:inline-block; width:15px; height:15px; background-color:red;"></span>	-0.6 - 6
<span style="display:inline-block; width:15px; height:15px; background-color:orange;"></span>	6.1 - 8
<span style="display:inline-block; width:15px; height:15px; background-color:yellow;"></span>	8.1 - 10
<span style="display:inline-block; width:15px; height:15px; background-color:lightgreen;"></span>	10.1 - 12
<span style="display:inline-block; width:15px; height:15px; background-color:blue;"></span>	12.1 - 30

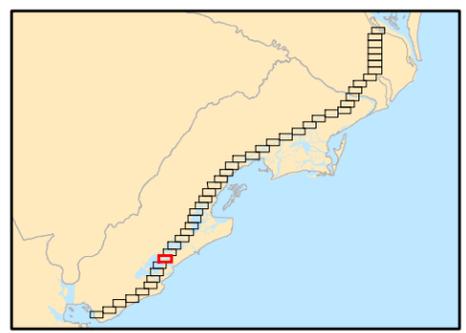



**US Army Corps  
Of Engineers®  
Charleston District**

<b>Survey Area:</b> Atlantic Intracoastal Waterway - Winyah Bay to Charleston	
<b>Survey Date:</b>	2013-09
<b>Survey Crew:</b>	USACE Survey Team
<b>Survey File Name:</b>	20130900_ICW_WBC_MB_CS_ALL.xyz
<b>Imagery/Background:</b>	2011 NRCS NAIP
<b>Mapped By:</b>	

# AIWW W-C 38




USDA, FSA, APFO

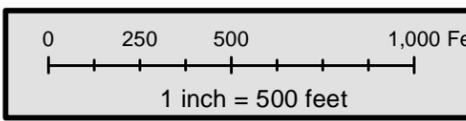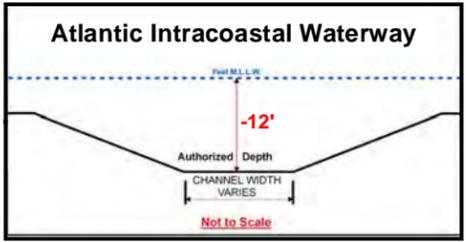

**Notes:**  
 - Soundings are expressed in positive feet and tenths and are referenced to the Mean Lower Low Water (MLLW) datum  
 - Project surveyed with USACE survey vessels equipped with GPS positioning and hydrographic survey equipment that meets USACE Navigation and Dredging standards for soft bottom hydrographic surveys.  
 - Soundings are calibrated to tide gauges that are set to MLLW and referenced to published benchmarks  
 - Horizontal Datum: State Plane NAD-83 SC-3900 Intl Feet  
 - Project was designed by the Charleston District of the U.S. Army Corps of Engineers. The initials or signatures and registration designations of individuals appear on these project documents within the scope of their employment by ER 1110-1-8152  
 - Maps and associated information represents the result of surveys made on the date indicated and can only be considered as indicating the general condition existing at that time. These conditions are subject to rapid change due to shoaling events. A prudent mariner should not rely exclusively on the information provided here  
 - Aids to Navigation obtained from the U.S. Coast Guard Light List

Federal Channel	
Depth FT MLLW	
<span style="display:inline-block; width:15px; height:15px; background-color:red;"></span>	-0.6 - 6
<span style="display:inline-block; width:15px; height:15px; background-color:orange;"></span>	6.1 - 8
<span style="display:inline-block; width:15px; height:15px; background-color:yellow;"></span>	8.1 - 10
<span style="display:inline-block; width:15px; height:15px; background-color:lightgreen;"></span>	10.1 - 12
<span style="display:inline-block; width:15px; height:15px; background-color:blue;"></span>	12.1 - 30

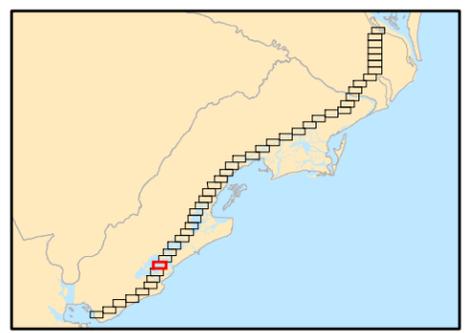

<b>Survey Area:</b> Atlantic Intracoastal Waterway - Winyah Bay to Charleston	
<b>Survey Date:</b>	2013-09
<b>Survey Crew:</b>	USACE Survey Team
<b>Survey File Name:</b>	20130900_ICW_WBC_MB_CS_ALL.xyz
<b>Imagery/Background:</b>	2011 NRCS NAIP
<b>Mapped By:</b>	

# AIWW W-C 39

R104



G 105

R106




USDA, FSA, APFO

## Atlantic Intracoastal Waterway


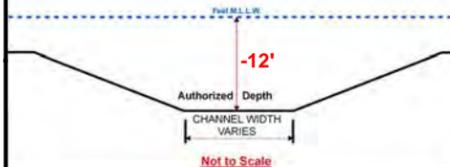


Notes:  
 - Soundings are expressed in positive feet and tenths and are referenced the Mean Lower Low Water (MLLW) datum  
 - Project surveyed with USACE survey vessels equipped with GPS positioning and hydrographic survey equipment that meets USACE Navigation and Dredging standards for soft bottom hydrographic surveys.  
 - Soundings are calibrated to tide gauges that are set to MLLW and referenced to published benchmarks  
 - Horizontal Datum: State Plane NAD-83 SC-3900 Intl Feet  
 - Project was designed by the Charleston District of the U.S. Army Corps of Engineers. The initials or signatures and registration designations of individuals appear on these project documents within the scope of their employment by ER 1110-1-8152  
 - Maps and associated information represents the result of surveys made on the date indicated and can only be considered as indicating the general condition existing at that time. These conditions are subject to rapid change due to shoaling events. A prudent mariner should not rely exclusively on the information provided here  
 - Aids to Navigation obtained from the U.S. Coast Guard Light List

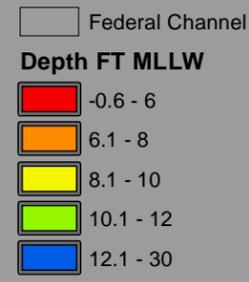

<b>Survey Area:</b> Atlantic Intracoastal Waterway - Winyah Bay to Charleston	
<b>Survey Date:</b>	2013-09
<b>Survey Crew:</b>	USACE Survey Team
<b>Survey File Name:</b>	20130900_ICW_WBC_MB_CS_ALL.xyz
<b>Imagery/Background:</b>	2011 NRCS NAIP
<b>Mapped By:</b>	

# AIWW W-C 40

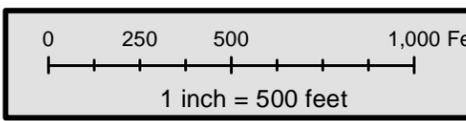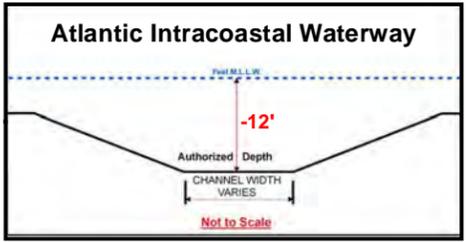

Notes:  
 - Soundings are expressed in positive feet and tenths and are referenced to the Mean Lower Low Water (MLLW) datum  
 - Project surveyed with USACE survey vessels equipped with GPS positioning and hydrographic survey equipment that meets USACE Navigation and Dredging standards for soft bottom hydrographic surveys.  
 - Soundings are calibrated to tide gauges that are set to MLLW and referenced to published benchmarks  
 - Horizontal Datum: State Plane NAD-83 SC-3900 Intl Feet  
 - Project was designed by the Charleston District of the U.S. Army Corps of Engineers. The initials or signatures and registration designations of individuals appear on these project documents within the scope of their employment by ER 1110-1-8152  
 - Maps and associated information represents the result of surveys made on the date indicated and can only be considered as indicating the general condition existing at that time. These conditions are subject to rapid change due to shoaling events. A prudent mariner should not rely exclusively on the information provided here  
 - Aids to Navigation obtained from the U.S. Coast Guard Light List

Federal Channel	
Depth FT MLLW	
<span style="display:inline-block; width:15px; height:15px; background-color:red;"></span>	-0.6 - 6
<span style="display:inline-block; width:15px; height:15px; background-color:orange;"></span>	6.1 - 8
<span style="display:inline-block; width:15px; height:15px; background-color:yellow;"></span>	8.1 - 10
<span style="display:inline-block; width:15px; height:15px; background-color:lightgreen;"></span>	10.1 - 12
<span style="display:inline-block; width:15px; height:15px; background-color:blue;"></span>	12.1 - 30





<b>Survey Area:</b> Atlantic Intracoastal Waterway - Winyah Bay to Charleston	
<b>Survey Date:</b>	2013-09
<b>Survey Crew:</b>	USACE Survey Team
<b>Survey File Name:</b>	20130900_ICW_WBC_MB_CS_ALL.xyz
<b>Imagery/Background:</b>	2011 NRCS NAIP
<b>Mapped By:</b>	

# AIWW W-C 41




USDA, FSA, APFO

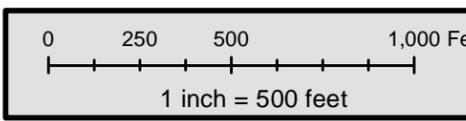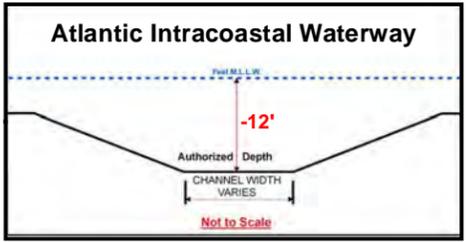


Notes:  
 - Soundings are expressed in positive feet and tenths and are referenced the Mean Lower Low Water (MLLW) datum  
 - Project surveyed with USACE survey vessels equipped with GPS positioning and hydrographic survey equipment that meets USACE Navigation and Dredging standards for soft bottom hydrographic surveys.  
 - Soundings are calibrated to tide gauges that are set to MLLW and referenced to published benchmarks  
 - Horizontal Datum: State Plane NAD-83 SC-3900 Intl Feet  
 - Project was designed by the Charleston District of the U.S. Army Corps of Engineers. The initials or signatures and registration designations of individuals appear on these project documents within the scope of their employment by ER 1110-1-8152  
 - Maps and associated information represents the result of surveys made on the date indicated and can only be considered as indicating the general condition existing at that time. These conditions are subject to rapid change due to shoaling events. A prudent mariner should not rely exclusively on the information provided here  
 - Aids to Navigation obtained from the U.S. Coast Guard Light List

Federal Channel	
Depth FT MLLW	
<span style="display:inline-block; width:15px; height:15px; background-color:red;"></span>	-0.6 - 6
<span style="display:inline-block; width:15px; height:15px; background-color:orange;"></span>	6.1 - 8
<span style="display:inline-block; width:15px; height:15px; background-color:yellow;"></span>	8.1 - 10
<span style="display:inline-block; width:15px; height:15px; background-color:lightgreen;"></span>	10.1 - 12
<span style="display:inline-block; width:15px; height:15px; background-color:blue;"></span>	12.1 - 30


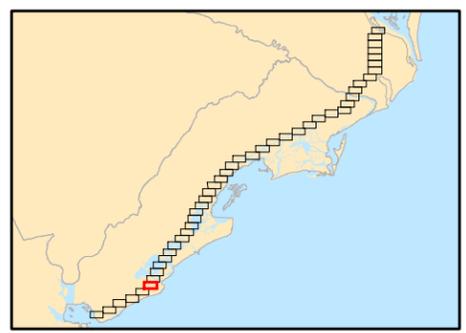


<b>Survey Area:</b> Atlantic Intracoastal Waterway - Winyah Bay to Charleston	
<b>Survey Date:</b>	2013-09
<b>Survey Crew:</b>	USACE Survey Team
<b>Survey File Name:</b>	20130900_ICW_WBC_MB_CS_ALL.xyz
<b>Imagery/Background:</b>	2011 NRCS NAIP
<b>Mapped By:</b>	

# AIWW W-C 42

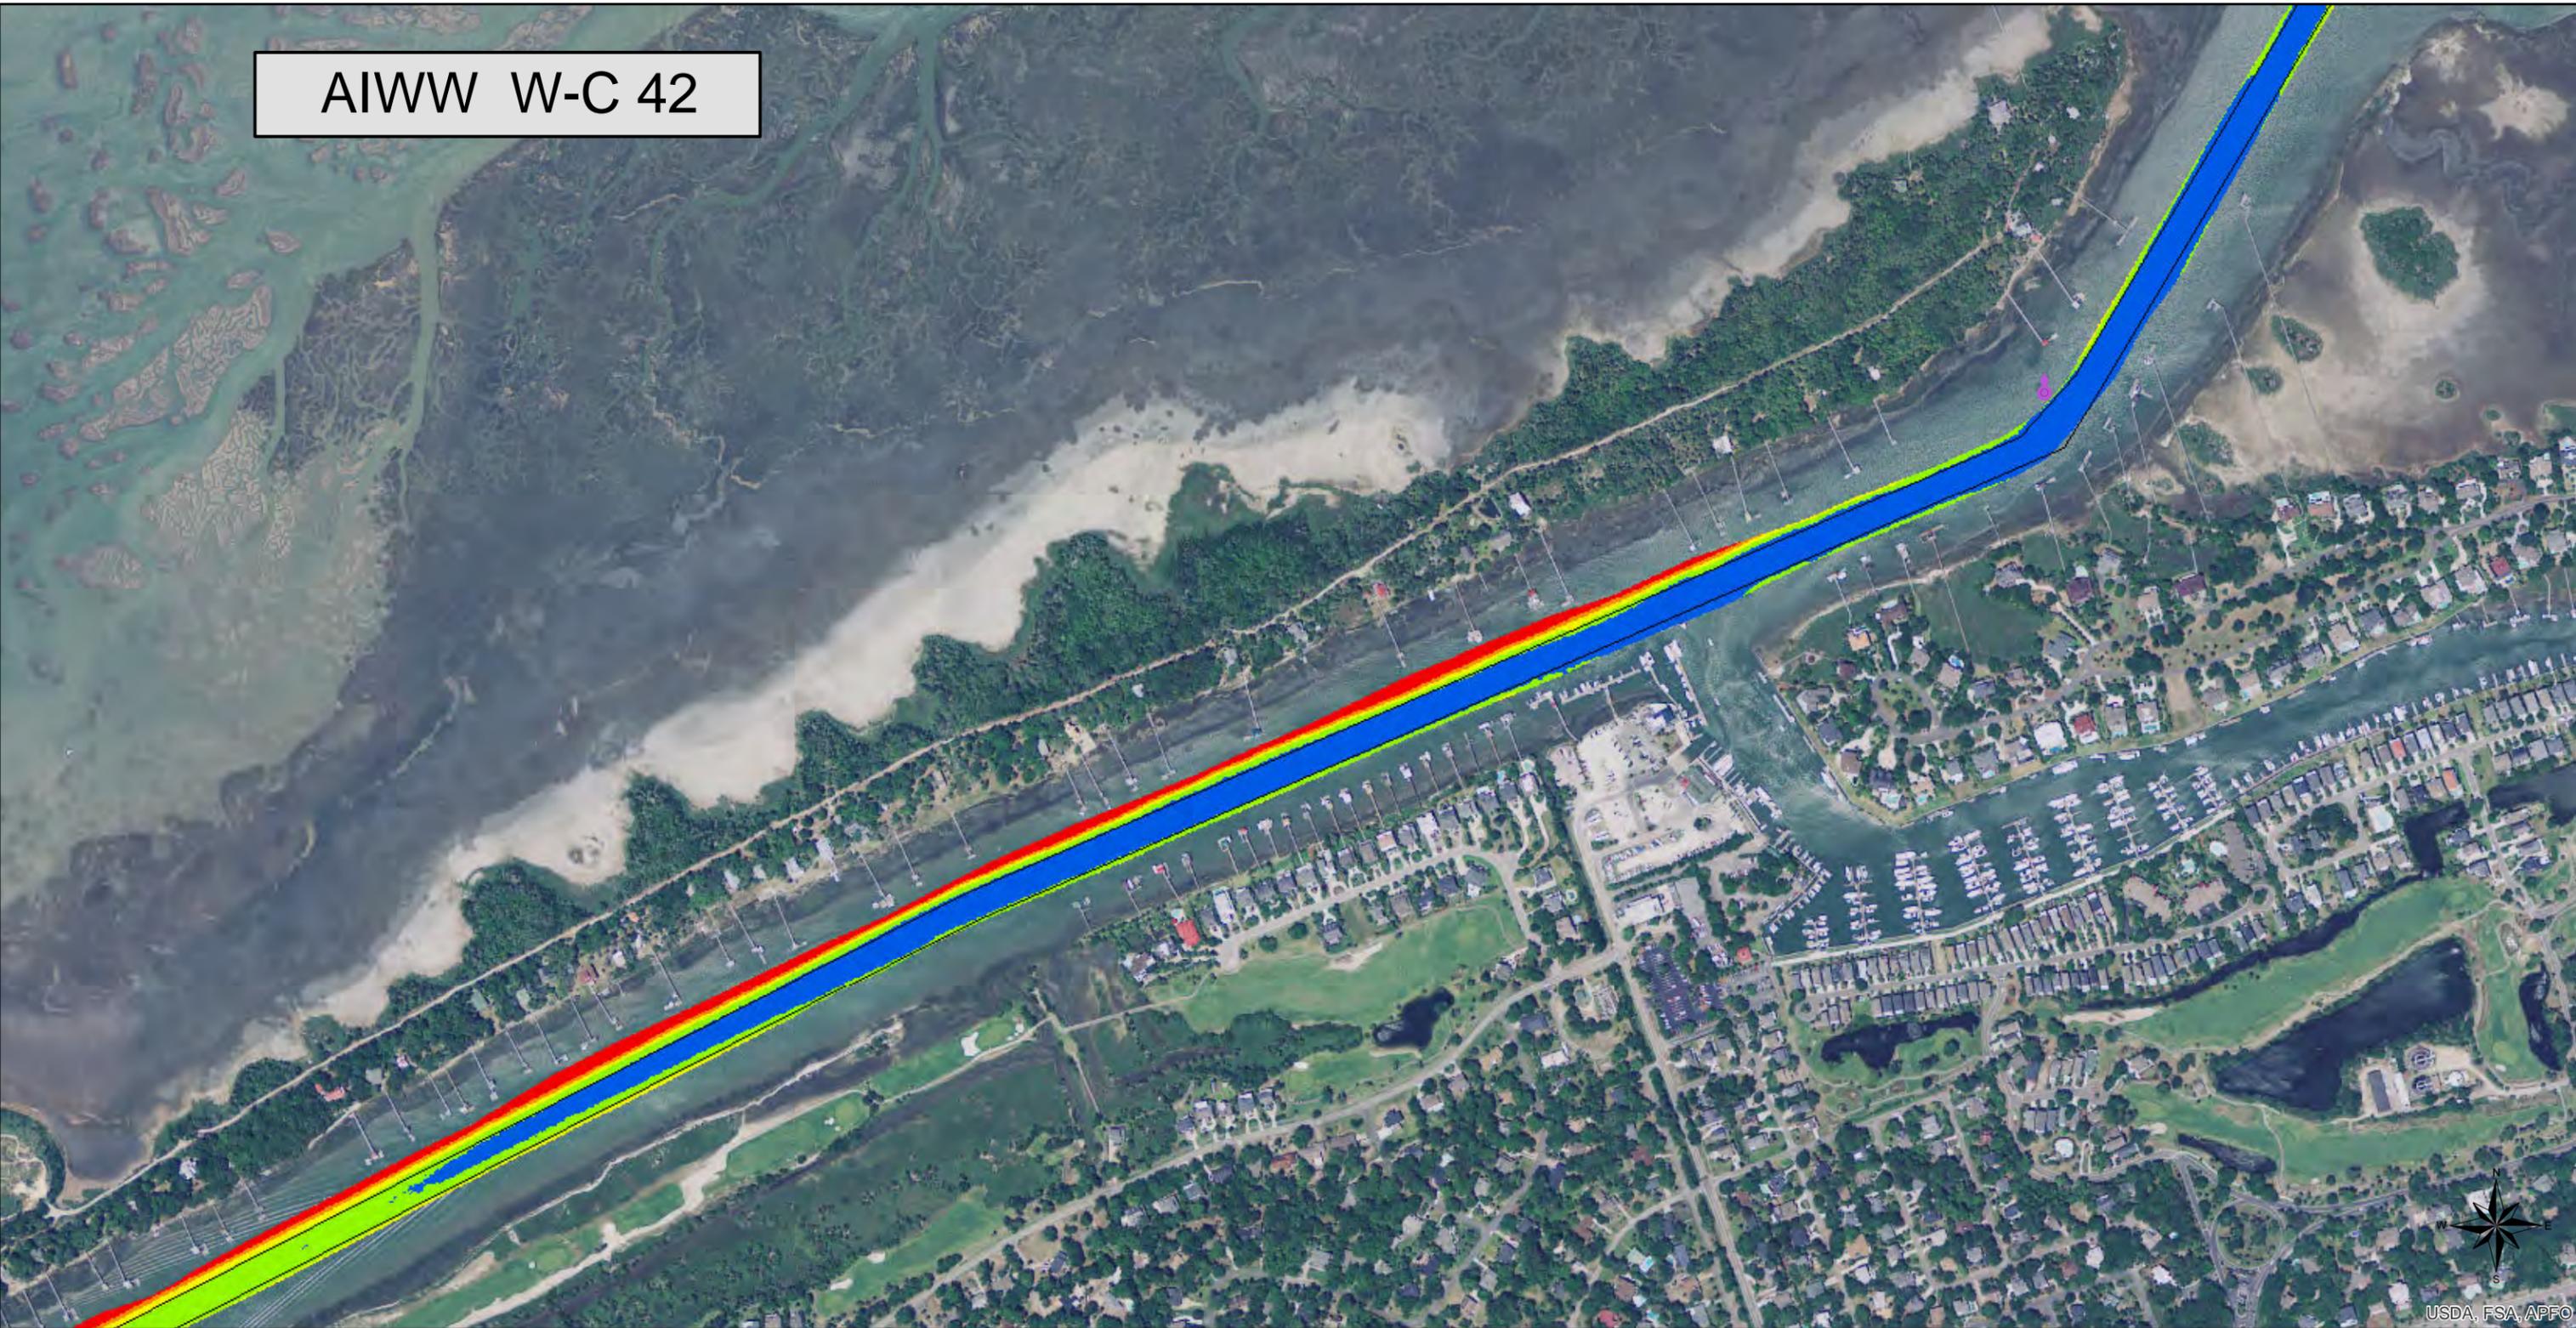


USDA, FSA, APFO

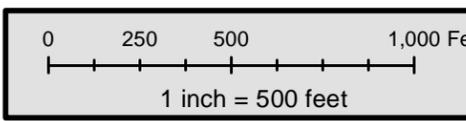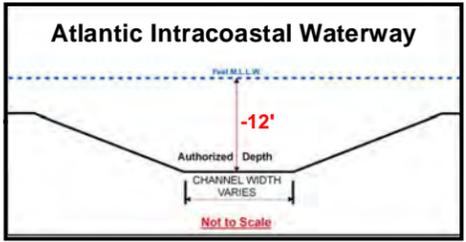




**Notes:**  
 - Soundings are expressed in positive feet and tenths and are referenced the Mean Lower Low Water (MLLW) datum  
 - Project surveyed with USACE survey vessels equipped with GPS positioning and hydrographic survey equipment that meets USACE Navigation and Dredging standards for soft bottom hydrographic surveys.  
 - Soundings are calibrated to tide gauges that are set to MLLW and referenced to published benchmarks  
 - Horizontal Datum: State Plane NAD-83 SC-3900 Intl Feet  
 - Project was designed by the Charleston District of the U.S. Army Corps of Engineers. The initials or signatures and registration designations of individuals appear on these project documents within the scope of their employment by ER 1110-1-8152  
 - Maps and associated information represents the result of surveys made on the date indicated and can only be considered as indicating the general condition existing at that time. These conditions are subject to rapid change due to shoaling events. A prudent mariner should not rely exclusively on the information provided here  
 - Aids to Navigation obtained from the U.S. Coast Guard Light List

Federal Channel	
Depth FT MLLW	
<span style="display:inline-block; width:15px; height:15px; background-color:red;"></span>	0.6 - 6
<span style="display:inline-block; width:15px; height:15px; background-color:orange;"></span>	6.1 - 8
<span style="display:inline-block; width:15px; height:15px; background-color:yellow;"></span>	8.1 - 10
<span style="display:inline-block; width:15px; height:15px; background-color:lightgreen;"></span>	10.1 - 12
<span style="display:inline-block; width:15px; height:15px; background-color:blue;"></span>	12.1 - 30

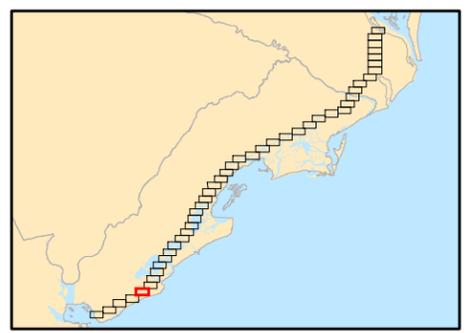


<b>Survey Area:</b> Atlantic Intracoastal Waterway - Winyah Bay to Charleston	
<b>Survey Date:</b>	2013-09
<b>Survey Crew:</b>	USACE Survey Team
<b>Survey File Name:</b>	20130900_ICW_WBC_MB_CS_ALL.xyz
<b>Imagery/Background:</b>	2011 NRCS NAIP
<b>Mapped By:</b>	

# AIWW W-C 43

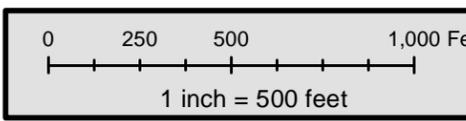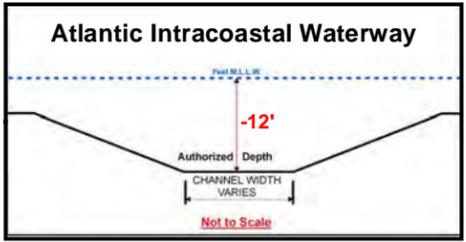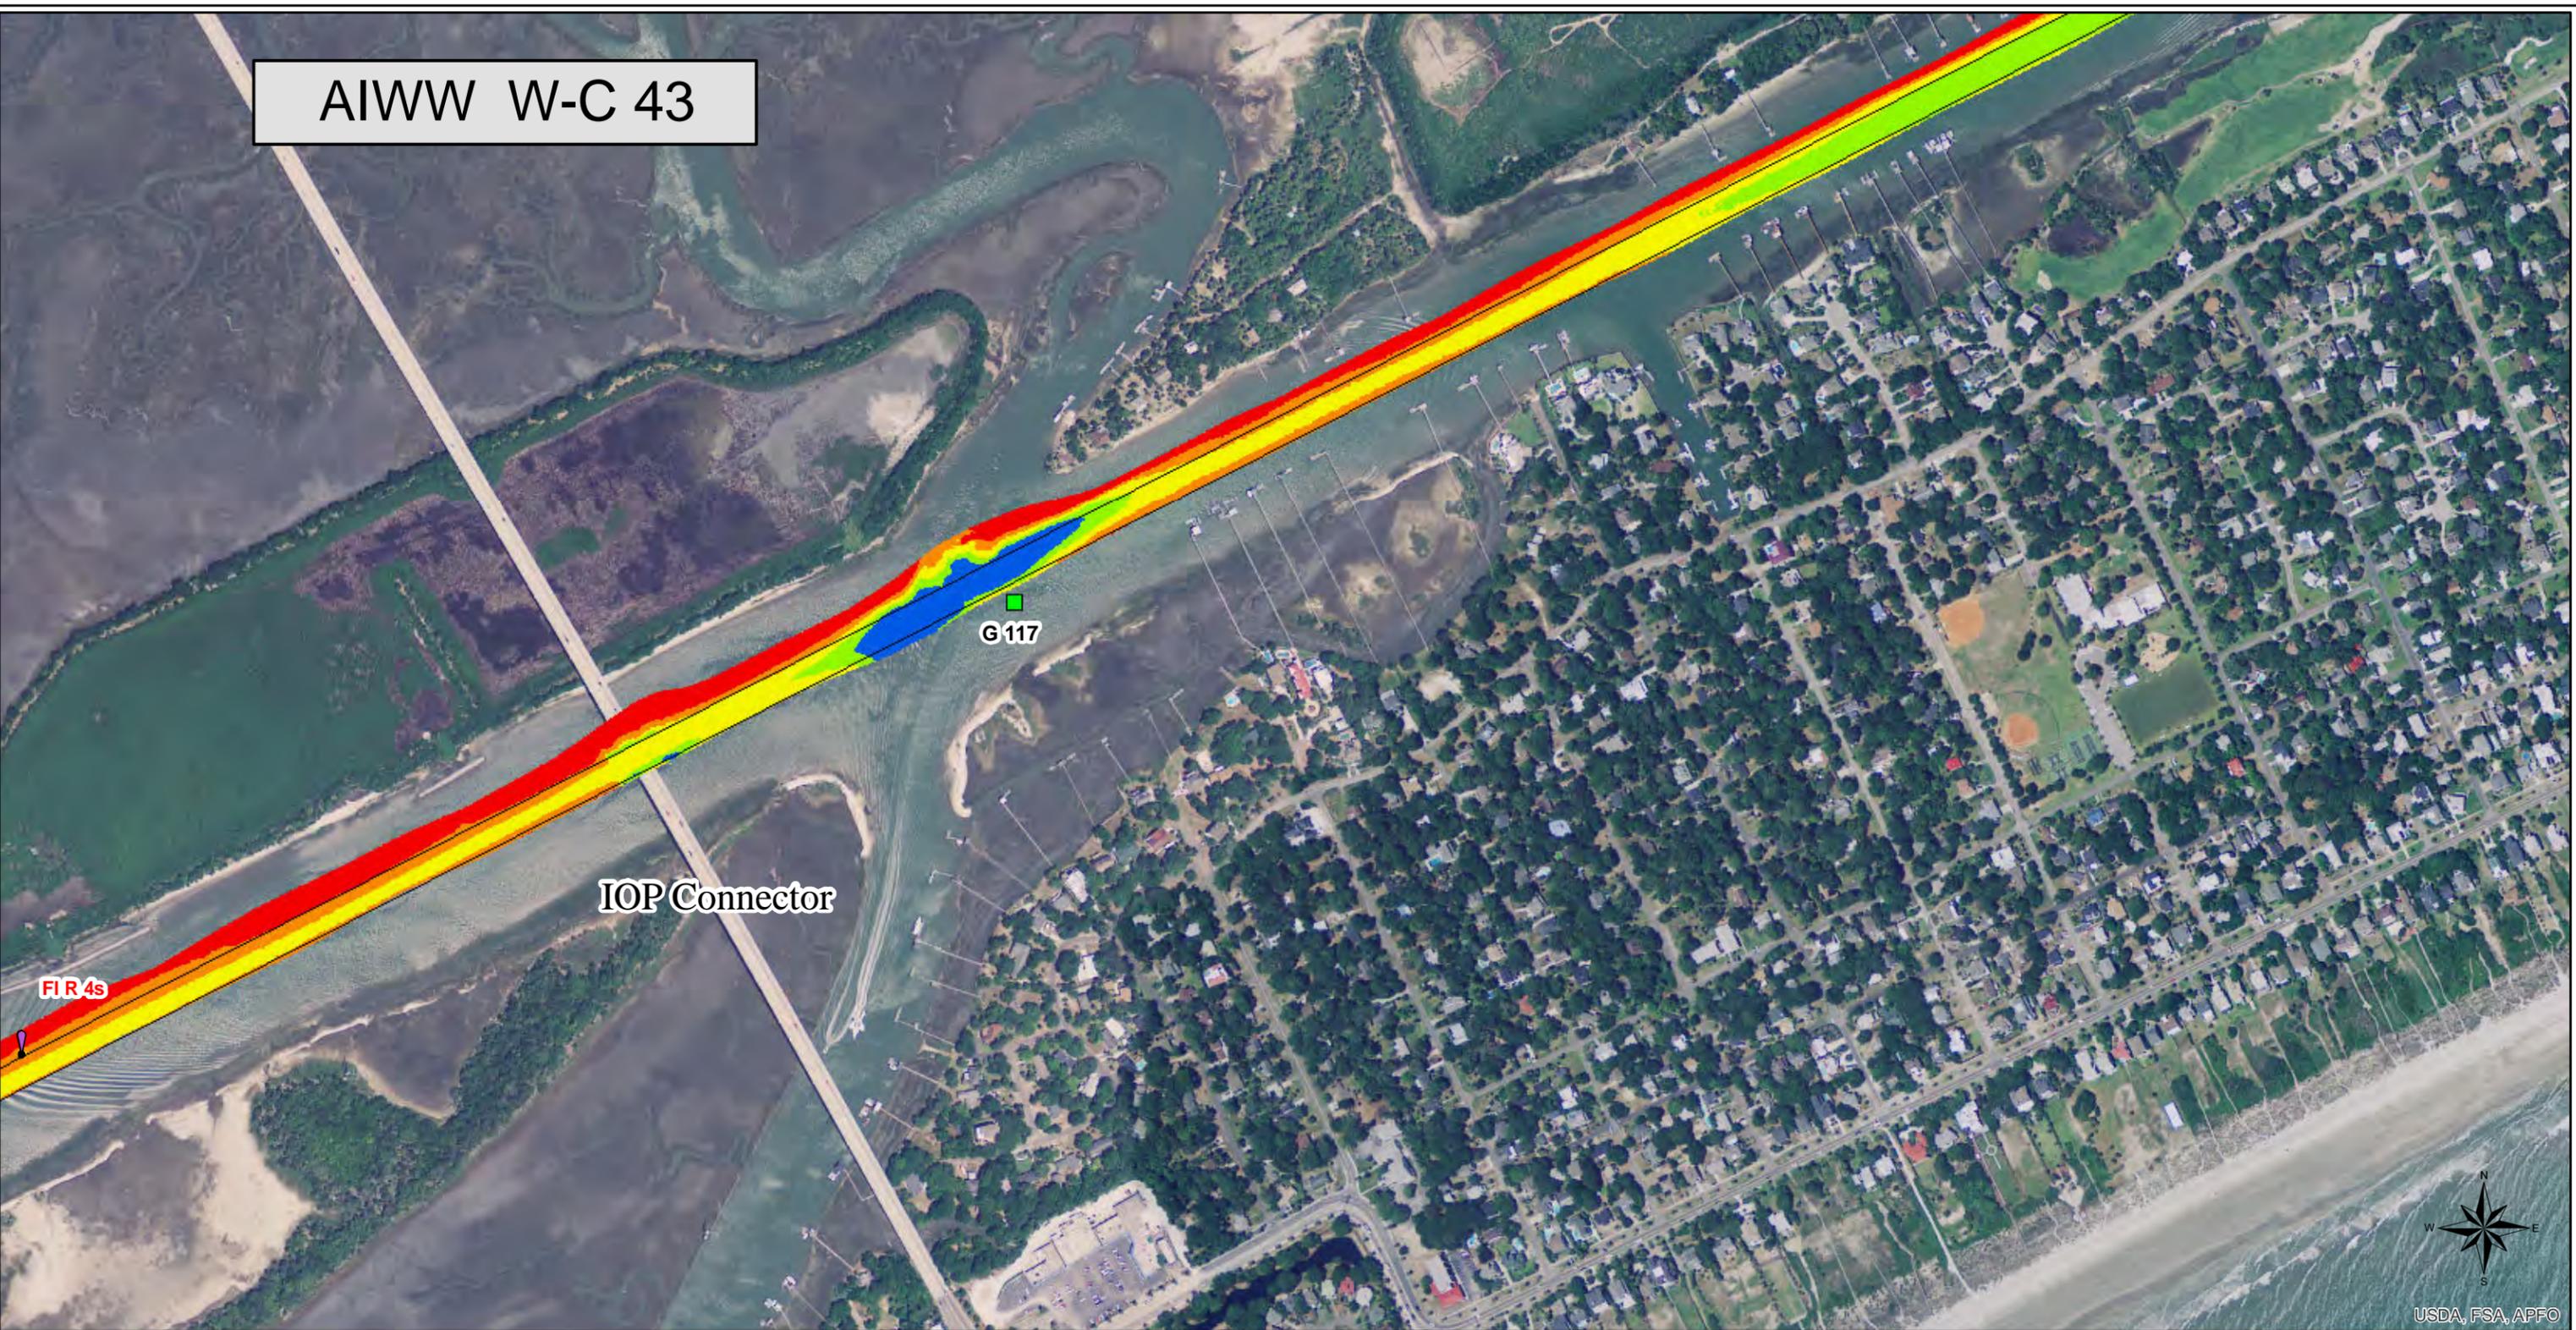




Notes:  
 - Soundings are expressed in positive feet and tenths and are referenced to the Mean Lower Low Water (MLLW) datum  
 - Project surveyed with USACE survey vessels equipped with GPS positioning and hydrographic survey equipment that meets USACE Navigation and Dredging standards for soft bottom hydrographic surveys.  
 - Soundings are calibrated to tide gauges that are set to MLLW and referenced to published benchmarks  
 - Horizontal Datum: State Plane NAD-83 SC-3900 Intl Feet  
 - Project was designed by the Charleston District of the U.S. Army Corps of Engineers. The initials or signatures and registration designations of individuals appear on these project documents within the scope of their employment by ER 1110-1-8152  
 - Maps and associated information represents the result of surveys made on the date indicated and can only be considered as indicating the general condition existing at that time. These conditions are subject to rapid change due to shoaling events. A prudent mariner should not rely exclusively on the information provided here  
 - Aids to Navigation obtained from the U.S. Coast Guard Light List

Federal Channel	
Depth FT MLLW	
<span style="background-color: red; color: black;"> </span>	-0.6 - 6
<span style="background-color: orange; color: black;"> </span>	6.1 - 8
<span style="background-color: yellow; color: black;"> </span>	8.1 - 10
<span style="background-color: lightgreen; color: black;"> </span>	10.1 - 12
<span style="background-color: blue; color: black;"> </span>	12.1 - 30

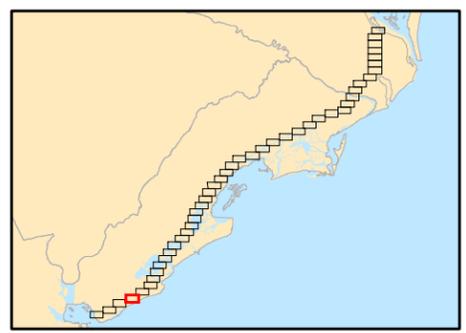


<b>Survey Area:</b> Atlantic Intracoastal Waterway - Winyah Bay to Charleston	
<b>Survey Date:</b>	2013-09
<b>Survey Crew:</b>	USACE Survey Team
<b>Survey File Name:</b>	20130900_ICW_WBC_MB_CS_ALL.xyz
<b>Imagery/Background:</b>	2011 NRCS NAIP
<b>Mapped By:</b>	

# AIWW W-C 44

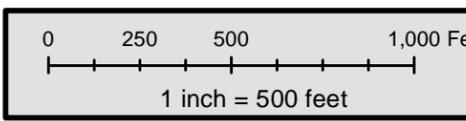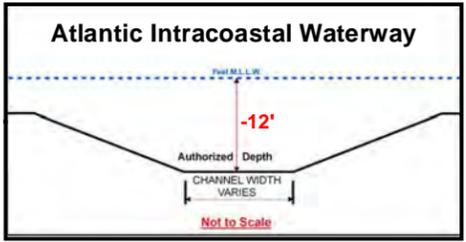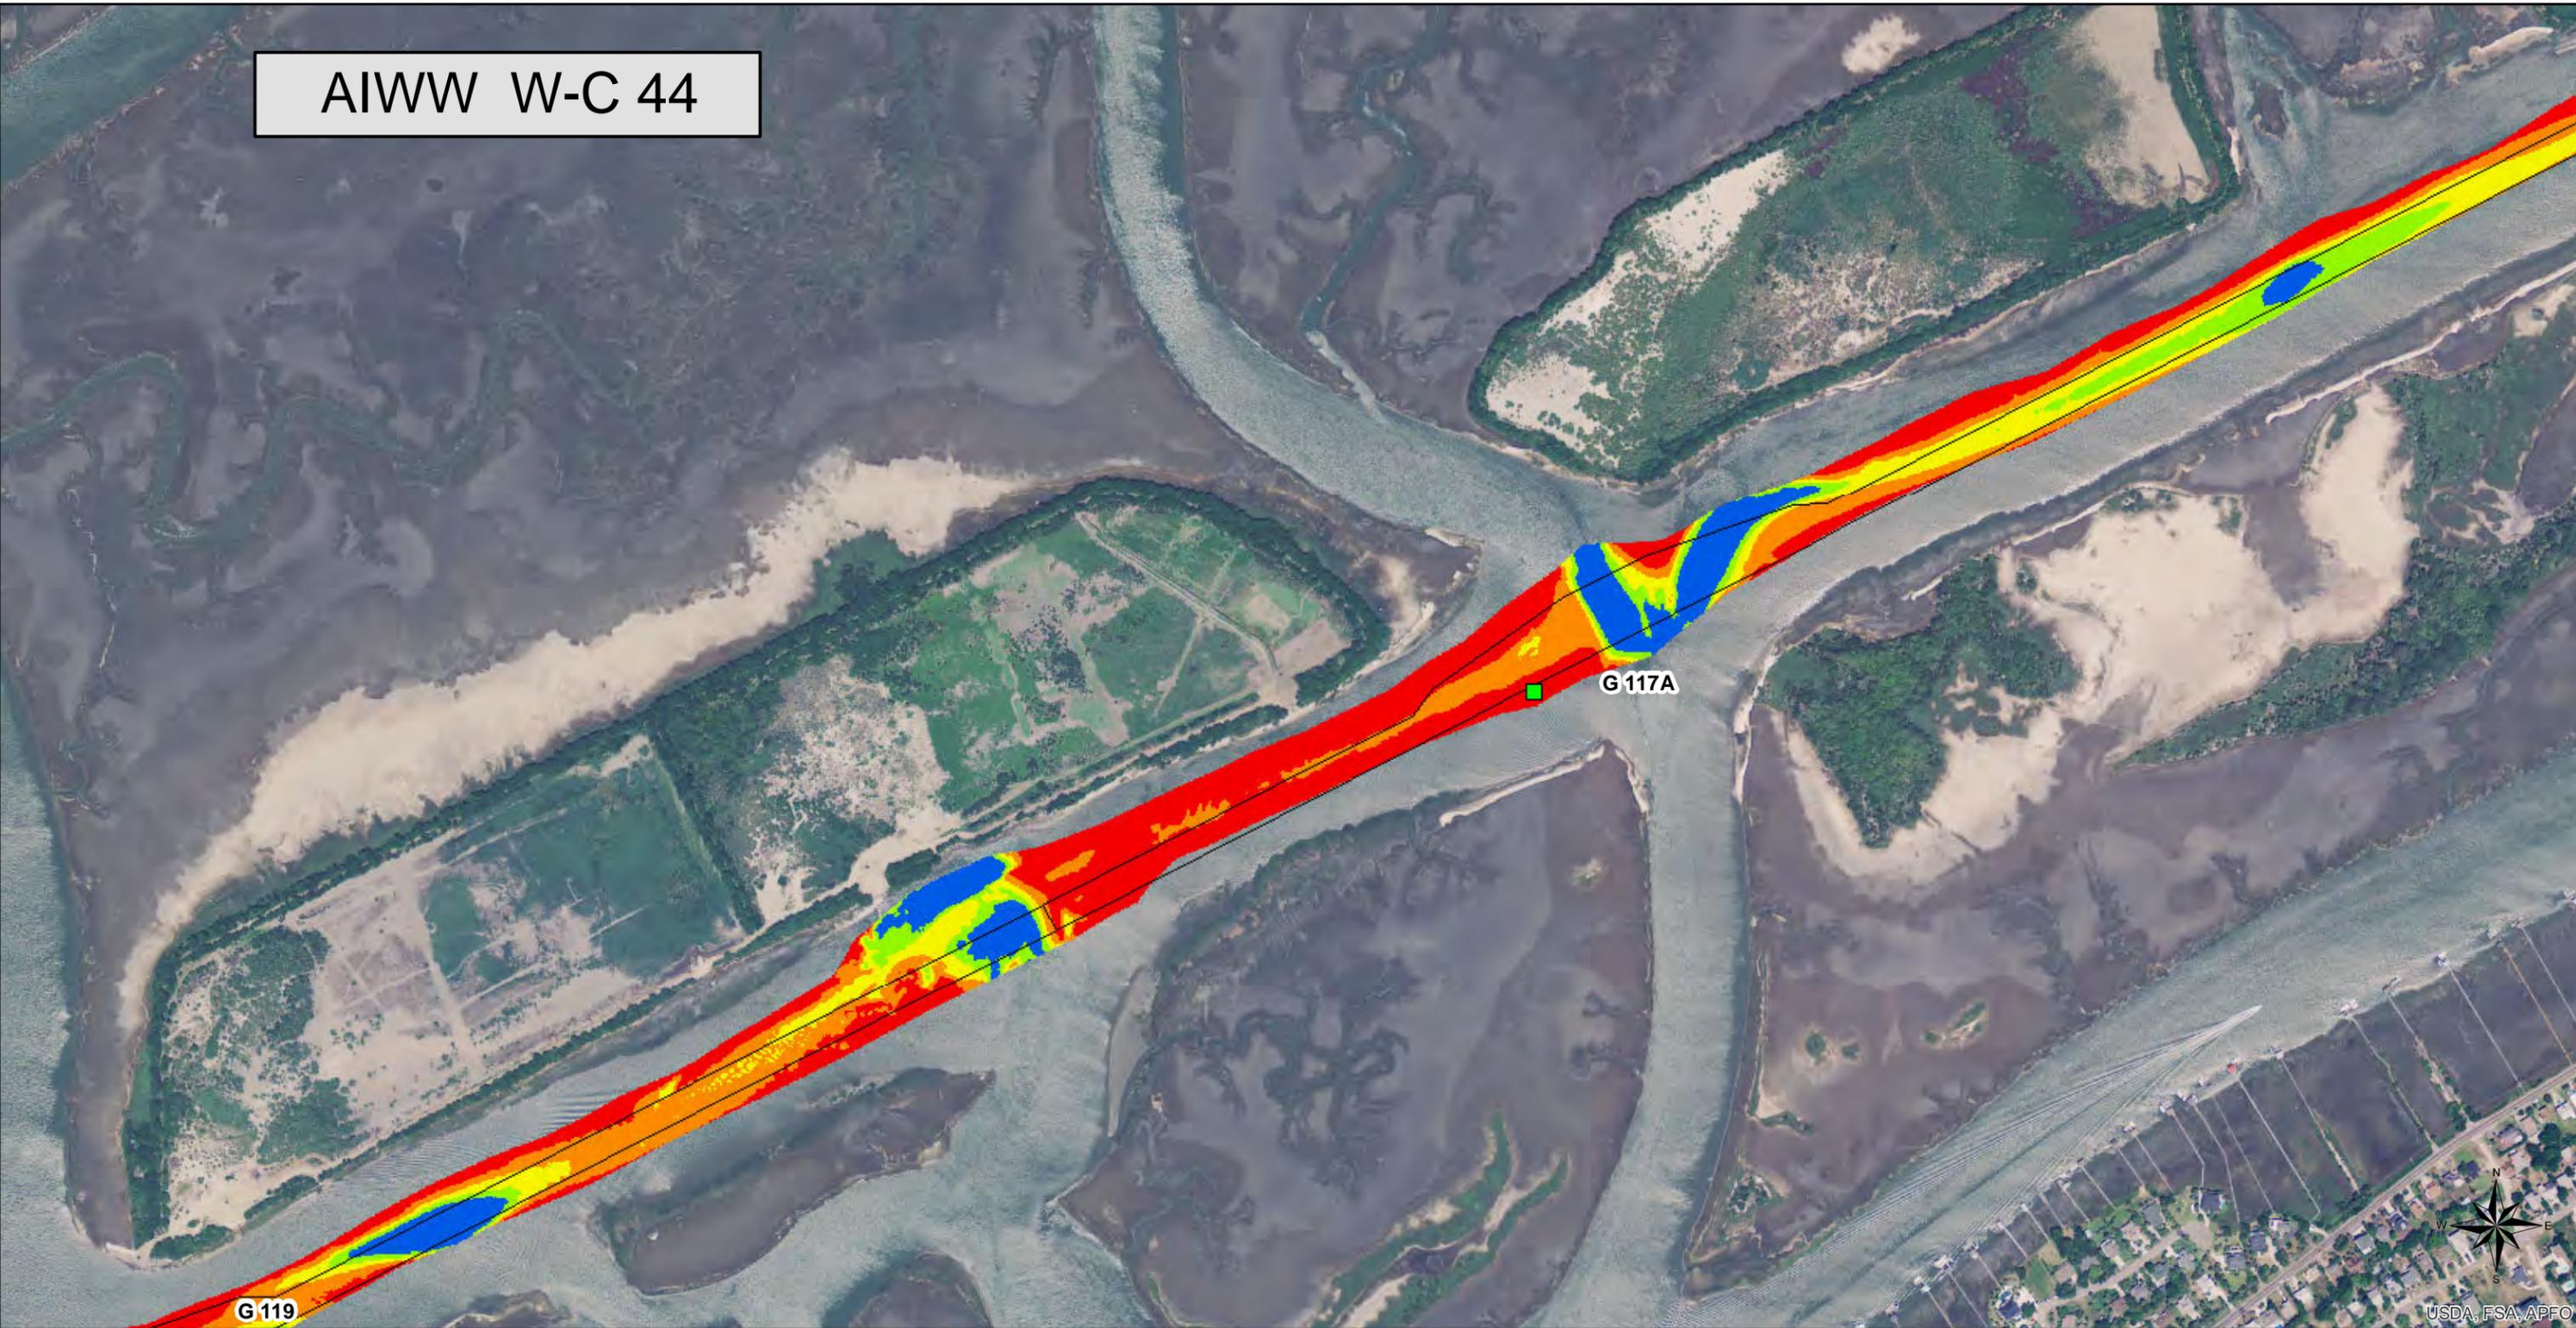


Notes:  
 - Soundings are expressed in positive feet and tenths and are referenced to the Mean Lower Low Water (MLLW) datum  
 - Project surveyed with USACE survey vessels equipped with GPS positioning and hydrographic survey equipment that meets USACE Navigation and Dredging standards for soft bottom hydrographic surveys.  
 - Soundings are calibrated to tide gauges that are set to MLLW and referenced to published benchmarks  
 - Horizontal Datum: State Plane NAD-83 SC-3900 Intl Feet  
 - Project was designed by the Charleston District of the U.S. Army Corps of Engineers. The initials or signatures and registration designations of individuals appear on these project documents within the scope of their employment by ER 1110-1-8152  
 - Maps and associated information represents the result of surveys made on the date indicated and can only be considered as indicating the general condition existing at that time. These conditions are subject to rapid change due to shoaling events. A prudent mariner should not rely exclusively on the information provided here  
 - Aids to Navigation obtained from the U.S. Coast Guard Light List

Federal Channel	
Depth FT MLLW	
<span style="display:inline-block; width:15px; height:15px; background-color:red;"></span>	-0.6 - 6
<span style="display:inline-block; width:15px; height:15px; background-color:orange;"></span>	6.1 - 8
<span style="display:inline-block; width:15px; height:15px; background-color:yellow;"></span>	8.1 - 10
<span style="display:inline-block; width:15px; height:15px; background-color:lightgreen;"></span>	10.1 - 12
<span style="display:inline-block; width:15px; height:15px; background-color:blue;"></span>	12.1 - 30

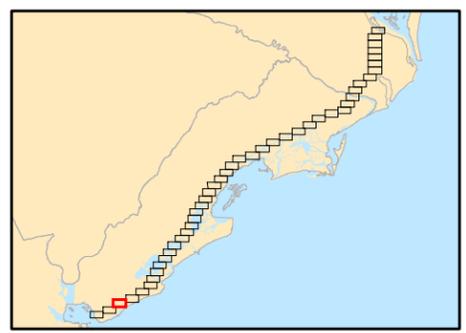


<b>Survey Area:</b> Atlantic Intracoastal Waterway - Winyah Bay to Charleston	
<b>Survey Date:</b>	2013-09
<b>Survey Crew:</b>	USACE Survey Team
<b>Survey File Name:</b>	20130900_ICW_WBC_MB_CS_ALL.xyz
<b>Imagery/Background:</b>	2011 NRCS NAIP
<b>Mapped By:</b>	



# AIWW W-C 45

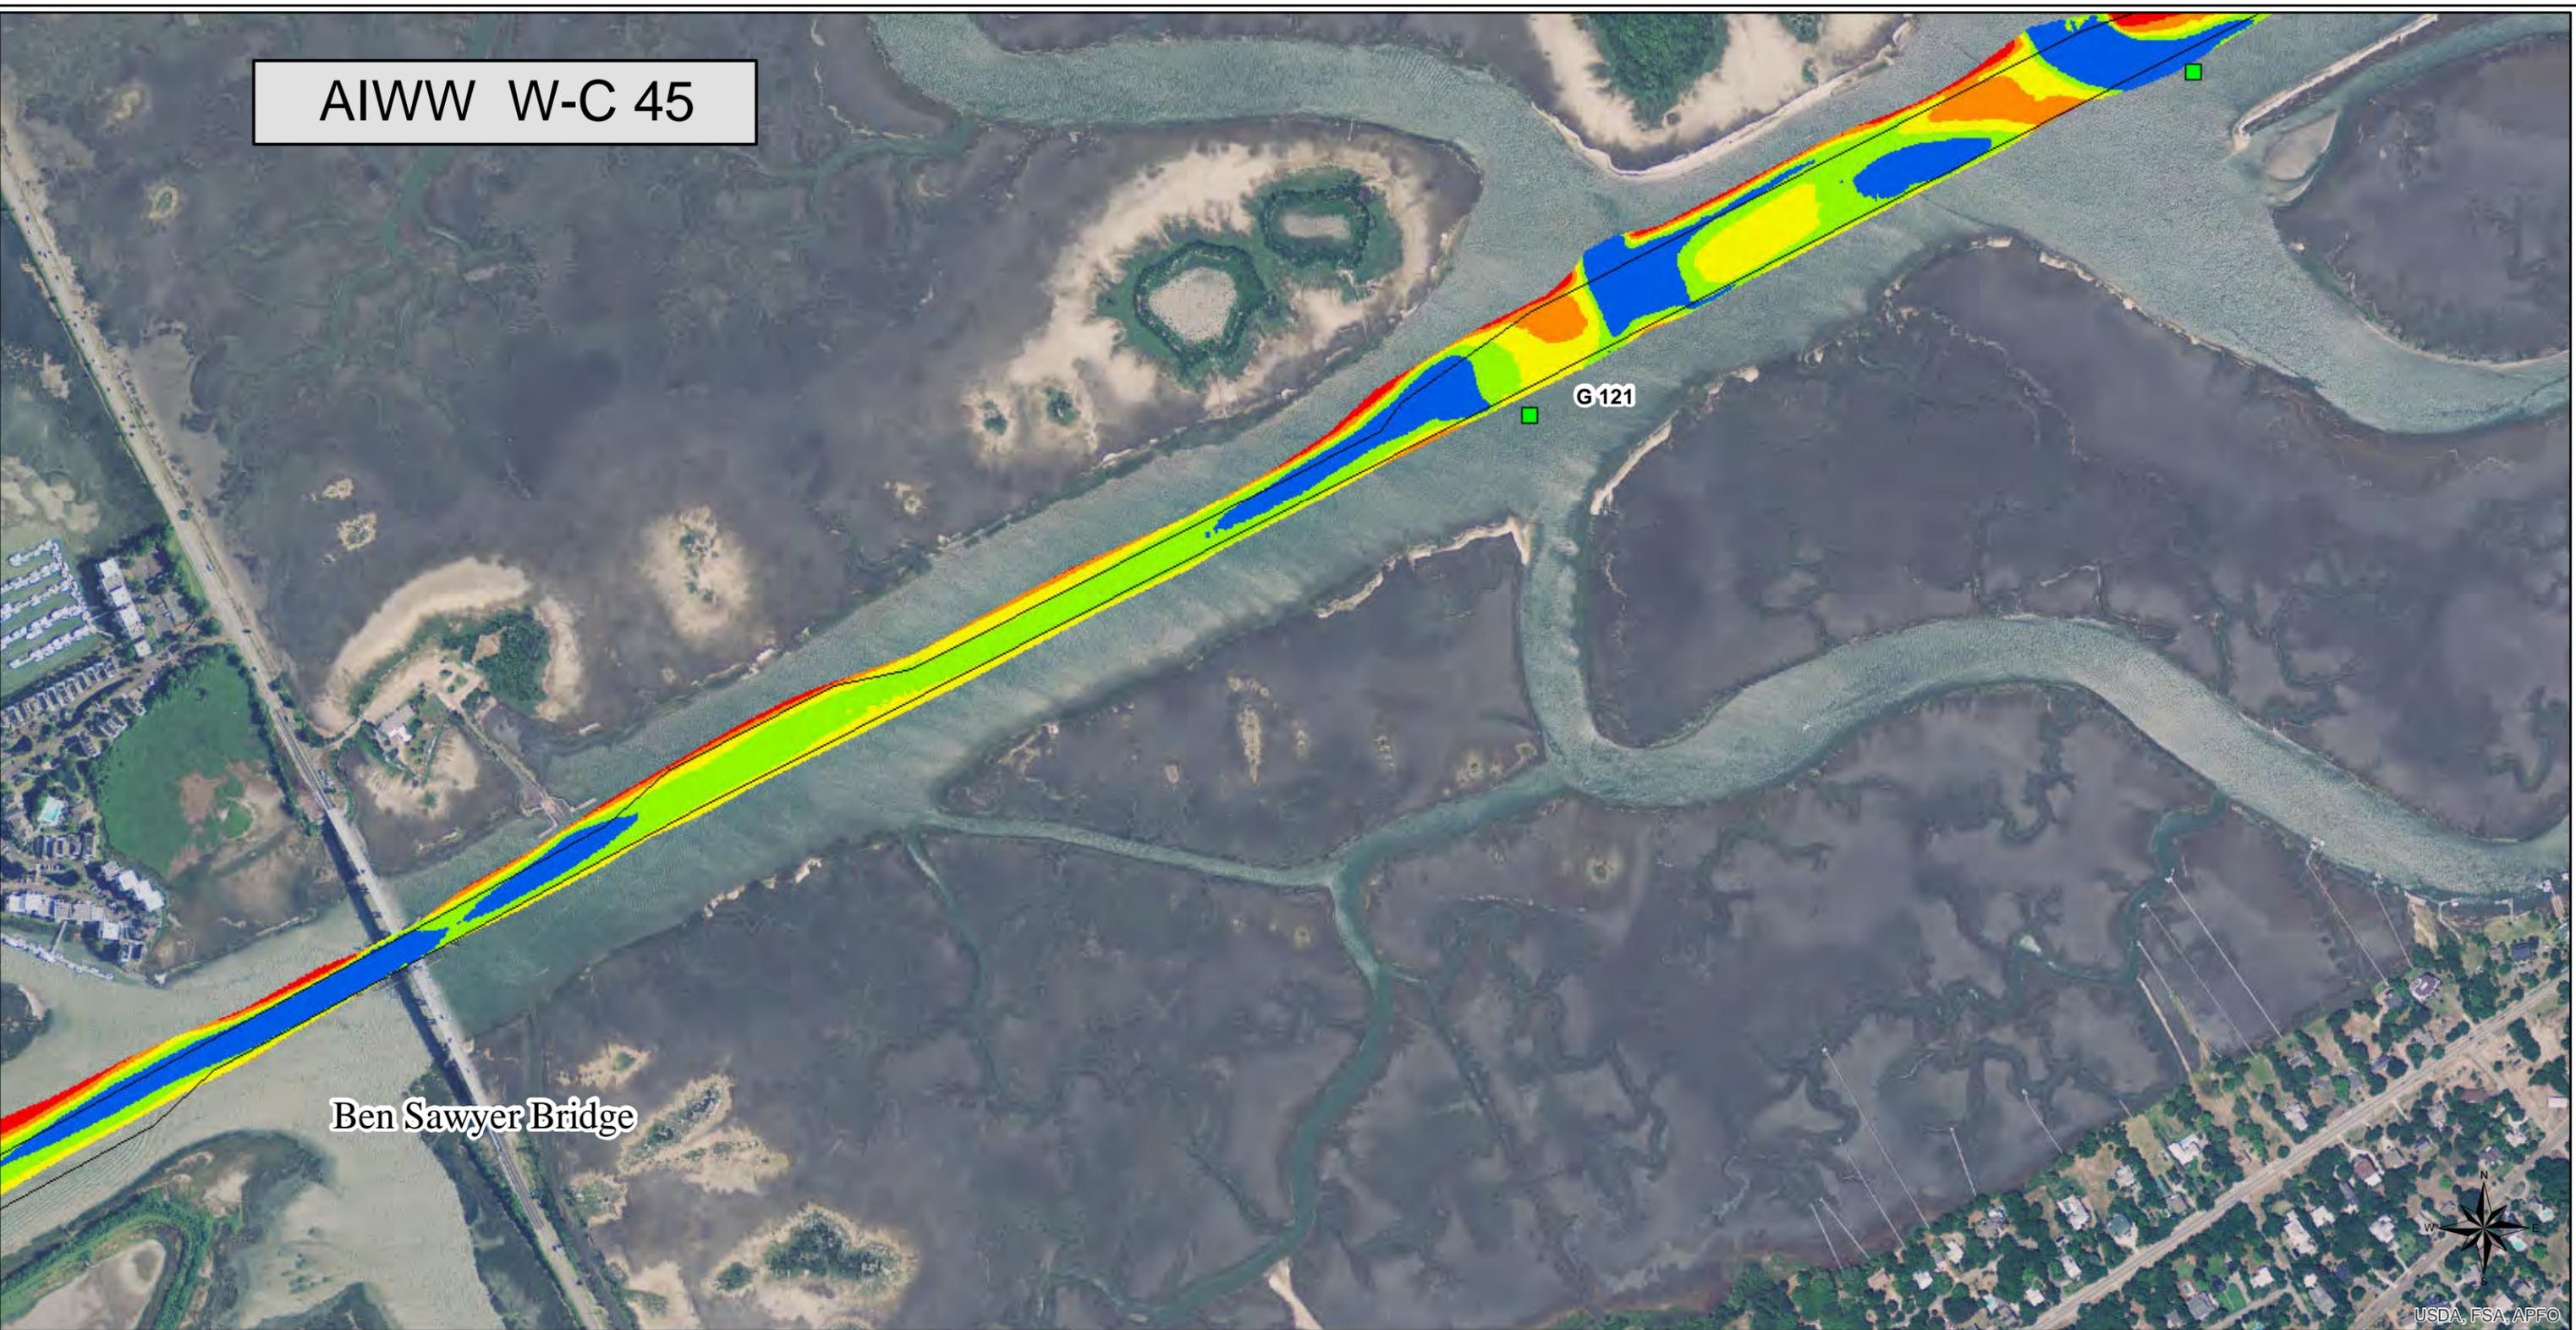

USDA, FSA, APFO

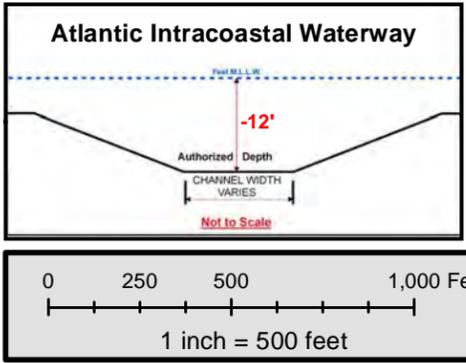


Notes:  
 - Soundings are expressed in positive feet and tenths and are referenced to the Mean Lower Low Water (MLLW) datum  
 - Project surveyed with USACE survey vessels equipped with GPS positioning and hydrographic survey equipment that meets USACE Navigation and Dredging standards for soft bottom hydrographic surveys.  
 - Soundings are calibrated to tide gauges that are set to MLLW and referenced to published benchmarks  
 - Horizontal Datum: State Plane NAD-83 SC-3900 Intl Feet  
 - Project was designed by the Charleston District of the U.S. Army Corps of Engineers. The initials or signatures and registration designations of individuals appear on these project documents within the scope of their employment by ER 1110-1-8152  
 - Maps and associated information represents the result of surveys made on the date indicated and can only be considered as indicating the general condition existing at that time. These conditions are subject to rapid change due to shoaling events. A prudent mariner should not rely exclusively on the information provided here  
 - Aids to Navigation obtained from the U.S. Coast Guard Light List

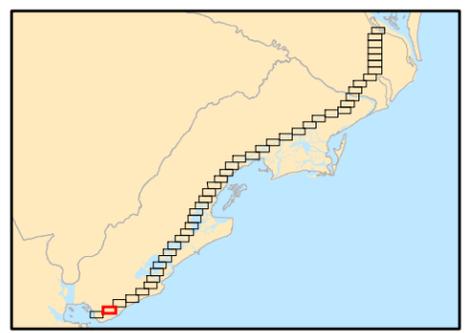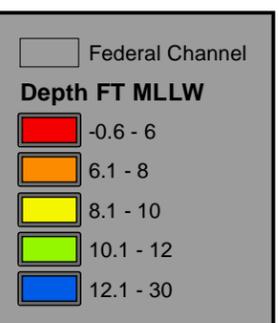


<b>Survey Area:</b> Atlantic Intracoastal Waterway - Winyah Bay to Charleston	
<b>Survey Date:</b>	2013-09
<b>Survey Crew:</b>	USACE Survey Team
<b>Survey File Name:</b>	20130900_ICW_WBC_MB_CS_ALL.xyz
<b>Imagery/Background:</b>	2011 NRCS NAIP
<b>Mapped By:</b>	



# AIWW W-C 46

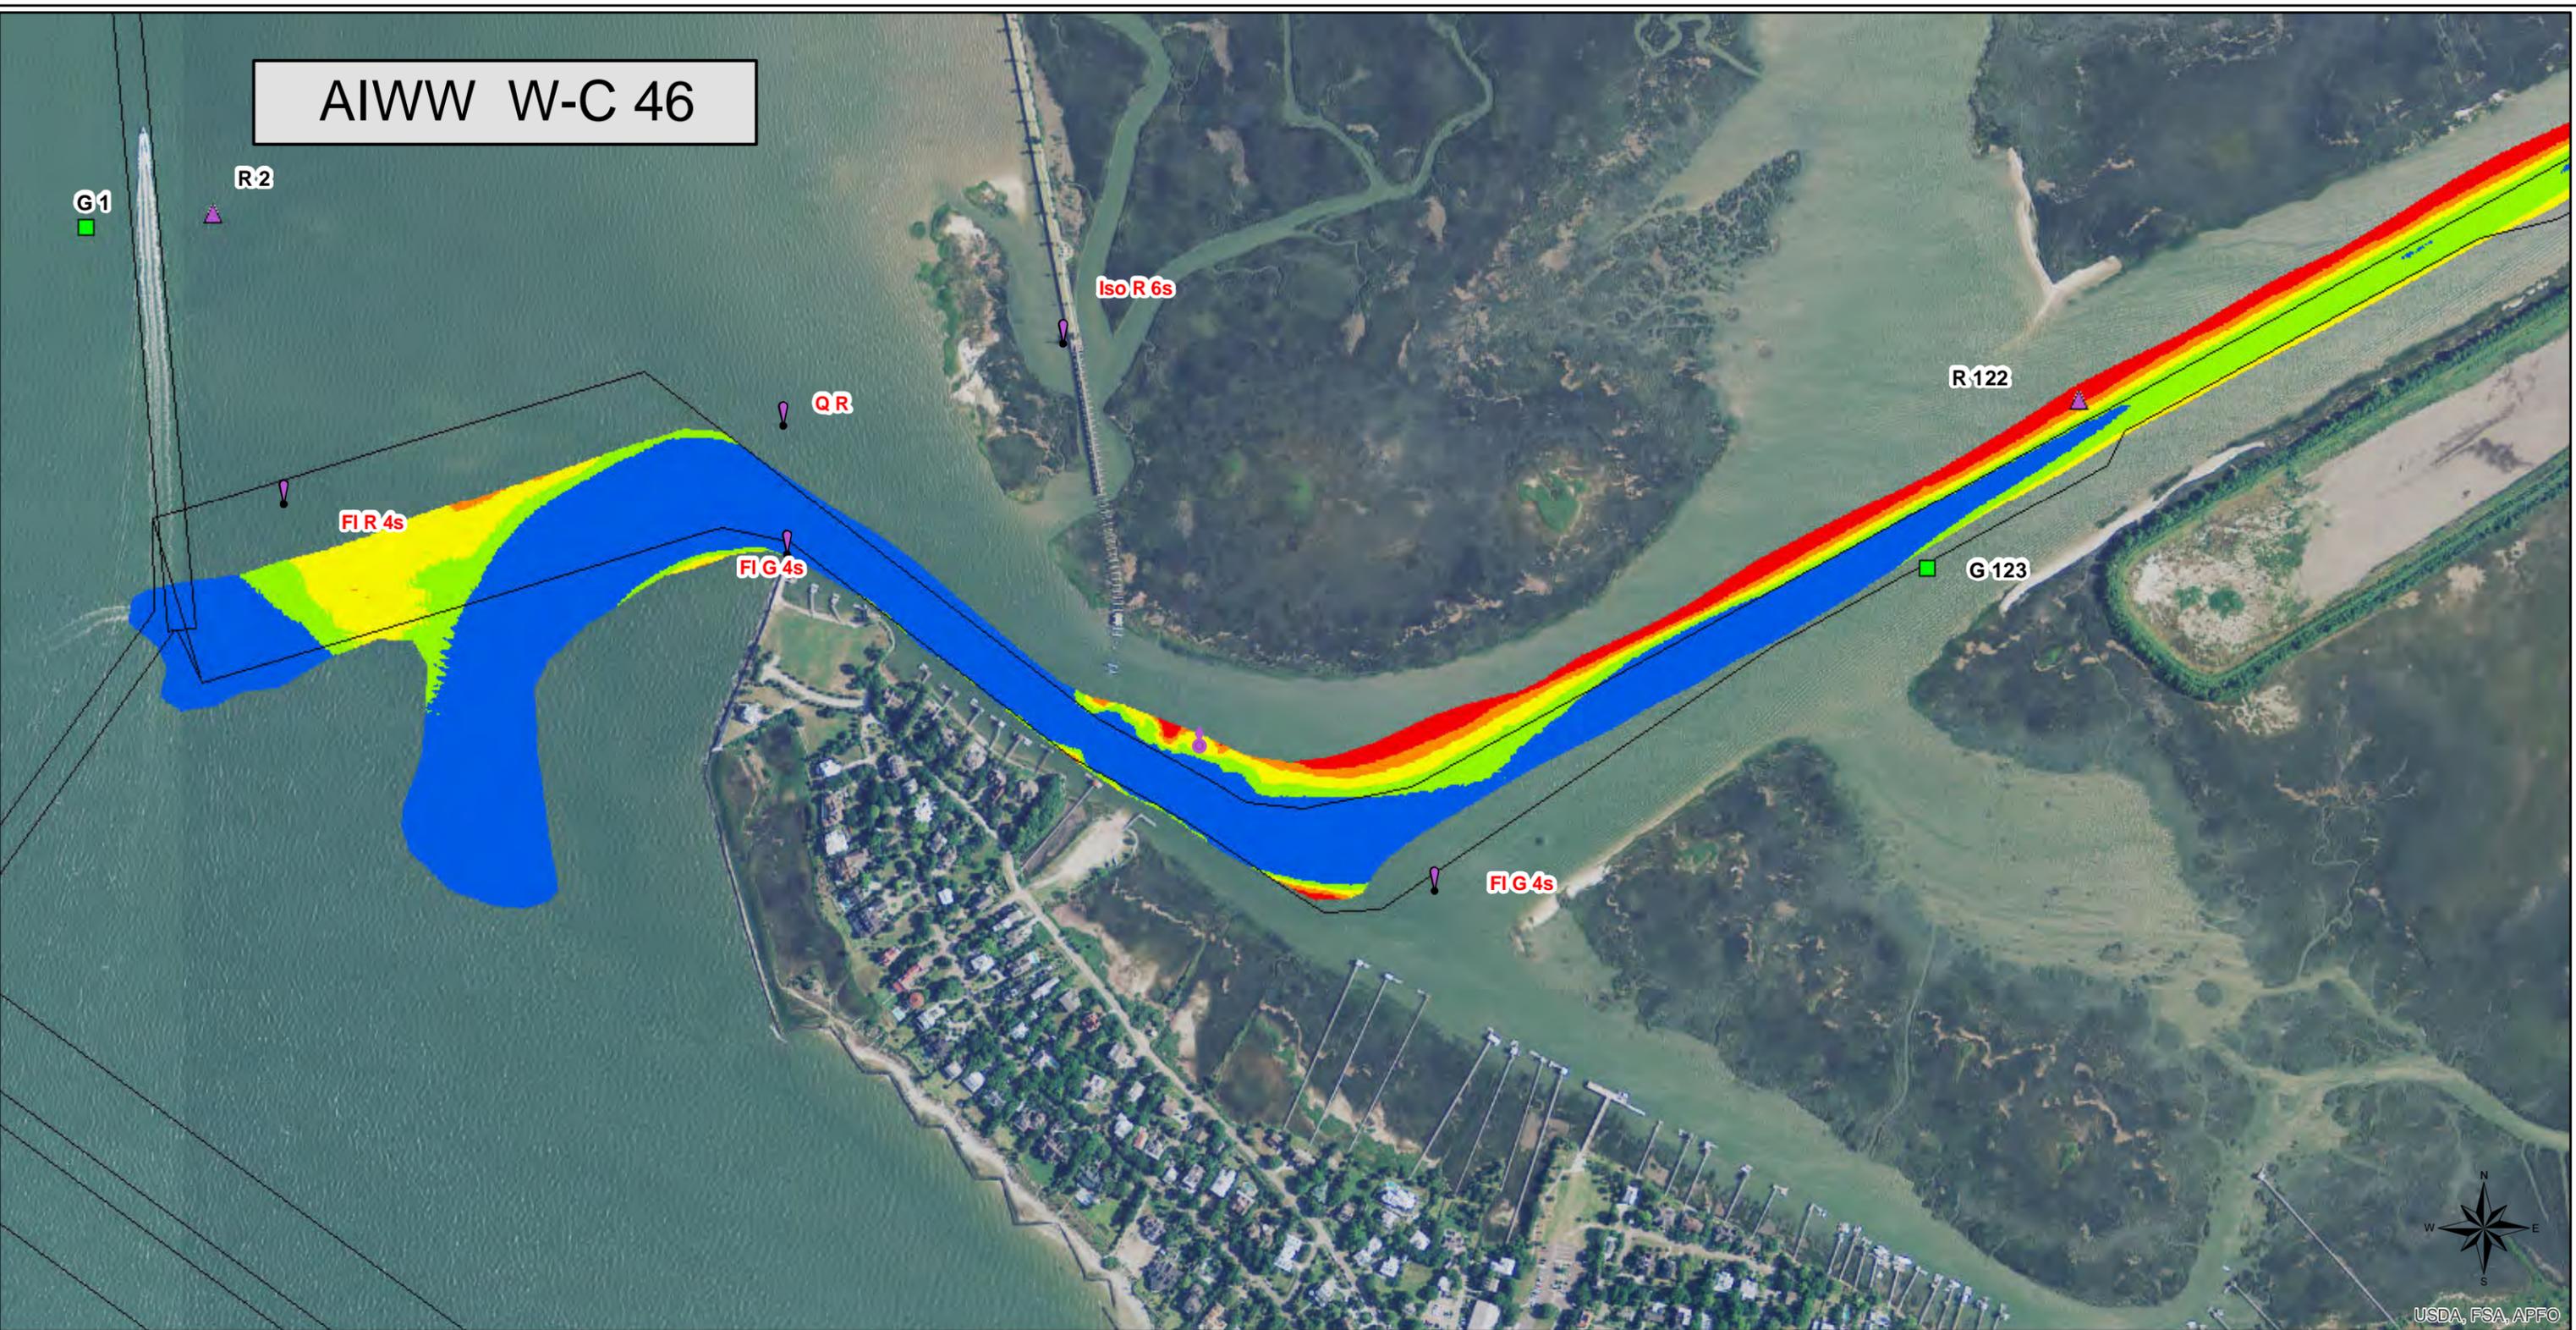

USDA, FSA, APFO

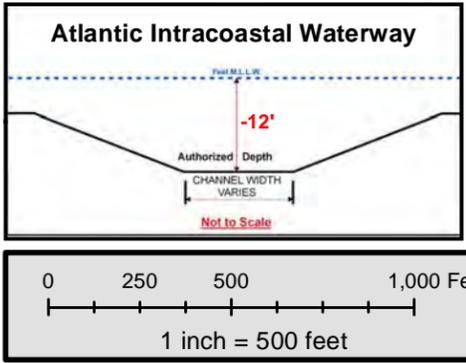

**Notes:**  
 - Soundings are expressed in positive feet and tenths and are referenced the Mean Lower Low Water (MLLW) datum  
 - Project surveyed with USACE survey vessels equipped with GPS positioning and hydrographic survey equipment that meets USACE Navigation and Dredging standards for soft bottom hydrographic surveys.  
 - Soundings are calibrated to tide gauges that are set to MLLW and referenced to published benchmarks  
 - Horizontal Datum: State Plane NAD-83 SC-3900 Intl Feet  
 - Project was designed by the Charleston District of the U.S. Army Corps of Engineers. The initials or signatures and registration designations of individuals appear on these project documents within the scope of their employment by ER 1110-1-8152  
 - Maps and associated information represents the result of surveys made on the date indicated and can only be considered as indicating the general condition existing at that time. These conditions are subject to rapid change due to shoaling events. A prudent mariner should not rely exclusively on the information provided here  
 - Aids to Navigation obtained from the U.S. Coast Guard Light List

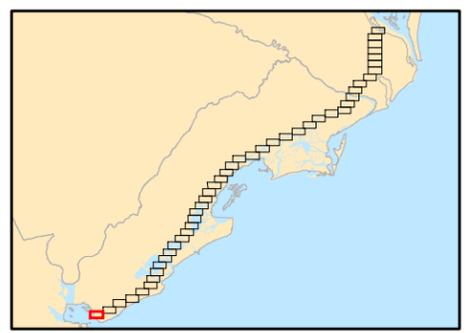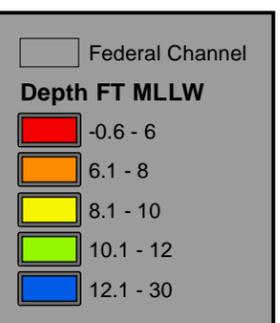

<b>Survey Area:</b> Atlantic Intracoastal Waterway - Winyah Bay to Charleston	
<b>Survey Date:</b>	2013-09
<b>Survey Crew:</b>	USACE Survey Team
<b>Survey File Name:</b>	20130900_ICW_WBC_MB_CS_ALL.xyz
<b>Imagery/Background:</b>	2011 NRCS NAIP
<b>Mapped By:</b>	