


U.S. Army Corps of Engineers
Charleston District
69A Hagood Ave
Charleston, SC 29403-5107

LEGEND	
BUILDING	
FENCE	
GUARD RAIL	
TREE LINE	
INDIVIDUAL TREE	
POWER POLE	
LIGHT POLE	
WATER	
WALL	
RETAINING WALL	
SHRUB	
BRUSH-MARSH LINE	
POST	
PAVED ROAD	
UNPAVED ROAD	
NAVAID GREEN	
NAVAID RED	
DISPOSAL AREA	
GPS CONTROL POINT	
H&V CONTROL	
U S HIGHWAY	
STATE HIGHWAY	
ROAD NUMBER	
WATERWAY	
ANCHORAGE	
WRECK	
MONUMENT	

WINYAH BAY TO CHARLESTON

SHEET INDEX

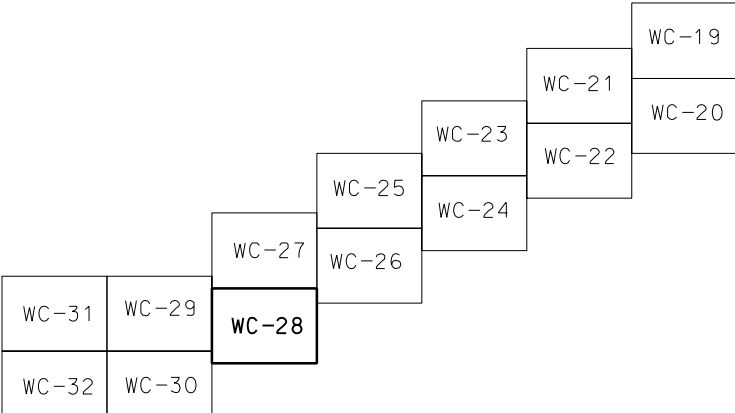

SPECIAL NOTE: THE INFORMATION SHOWN ON THIS DRAWING REPRESENTS THE RESULTS OF SURVEYS MADE ON THE DATES INDICATED ON EACH MAP AND CAN ONLY BE CONSIDERED AS INDICATING THE GENERAL CONDITIONS EXISTING ON THAT DATE.

NOTE:

ALL COORDINATES SHOWN ARE IN THE NAD 83 SOUTH CAROLINA STATE PLANE COORDINATE SYSTEM AND VERTICAL DATUM IS NAVD 88. OFFSET MONUMENTATION () GOVERNMENT FURNISHED FOR INFORMATION ONLY.

PREPARED BY:



FROM AERIAL PHOTOGRAPHY
FLOWN APRIL 19 - 2001
AT A SCALE 1" = 1000'

ATLANTIC INTRACOASTAL WATERWAY

STA. 292+00N TO STA. 330+12N

WINYAH BAY TO CHARLESTON SOUTH CAROLINA

SIZE DRAWING NO. 9104

E

SCALE: 1" = 200'

SHEET 26 OF 62

WC-526-00N

NOTES:

1. SOUNDINGS ARE IN FEET AND TENTHS AND REFER TO MEAN LOW WATER.
2. HORIZONTAL DATUM IS NAD 1983.
3. DATE OF SURVEY: 13 APRIL 2006
4. THE INFORMATION DEPICTED ON THESE MAPS REPRESENTS THE RESULTS OF SURVEYS MADE ON THE DATES INDICATED AND CAN ONLY BE CONSIDERED AS INDICATING THE GENERAL CONDITIONS EXISTING ON THE DATES OF THE SURVEY.

COORDINATES					
PT. NO.	STATION W/OFFSET	NAD 27		NAD 83	
		EAST (X)	NORTHING (Y)	EAST (X)	NORTHING (Y)
	322+00N 300L	2,456,389.52	447,682.26	2,456,406.27	447,835.42
	322+00N 350R	2,456,720.67	447,122.95	2,456,737.54	447,276.23
	306+00N 300L	2,455,012.77	446,867.10	2,455,029.80	447,019.96
	306+00N 350R	2,455,343.87	446,307.81	2,455,361.02	446,460.79
	292+94.22N 350R	2,454,244.51	445,656.82	2,454,261.88	445,809.57