COORDINATES					
PT.	STATION	NAD 27		NAD 83	
NO.	W/OFFSET	EAST (X)	NORTHING (Y)	EAST (X)	NORTHING (Y)
	1432+00N 200R	2,528,523.86	516,062.55	2,528,517.19	516,229.74
	1432+00N 200L	2,528,124.71	516,037.07	2,528,118.09	516,204.15
	1412+10.64N 200L	2,528,251.41	514,052.63	2,528,245.35	514,219.94
	1412+10.64N 200R	2,528,650.62	514,076.99	2,528,644.51	514,244.41
	1412+10.64N 160R	2,528,610.69	514,074.57	2,528,604.59	514,241.98
	1396+00N 200L	2,528,345.00	512,445.31	2,528,339.39	512,612.80
	1396+00N 200R	2,528,744.21	512,468.56	2,528,738.56	512,636.17

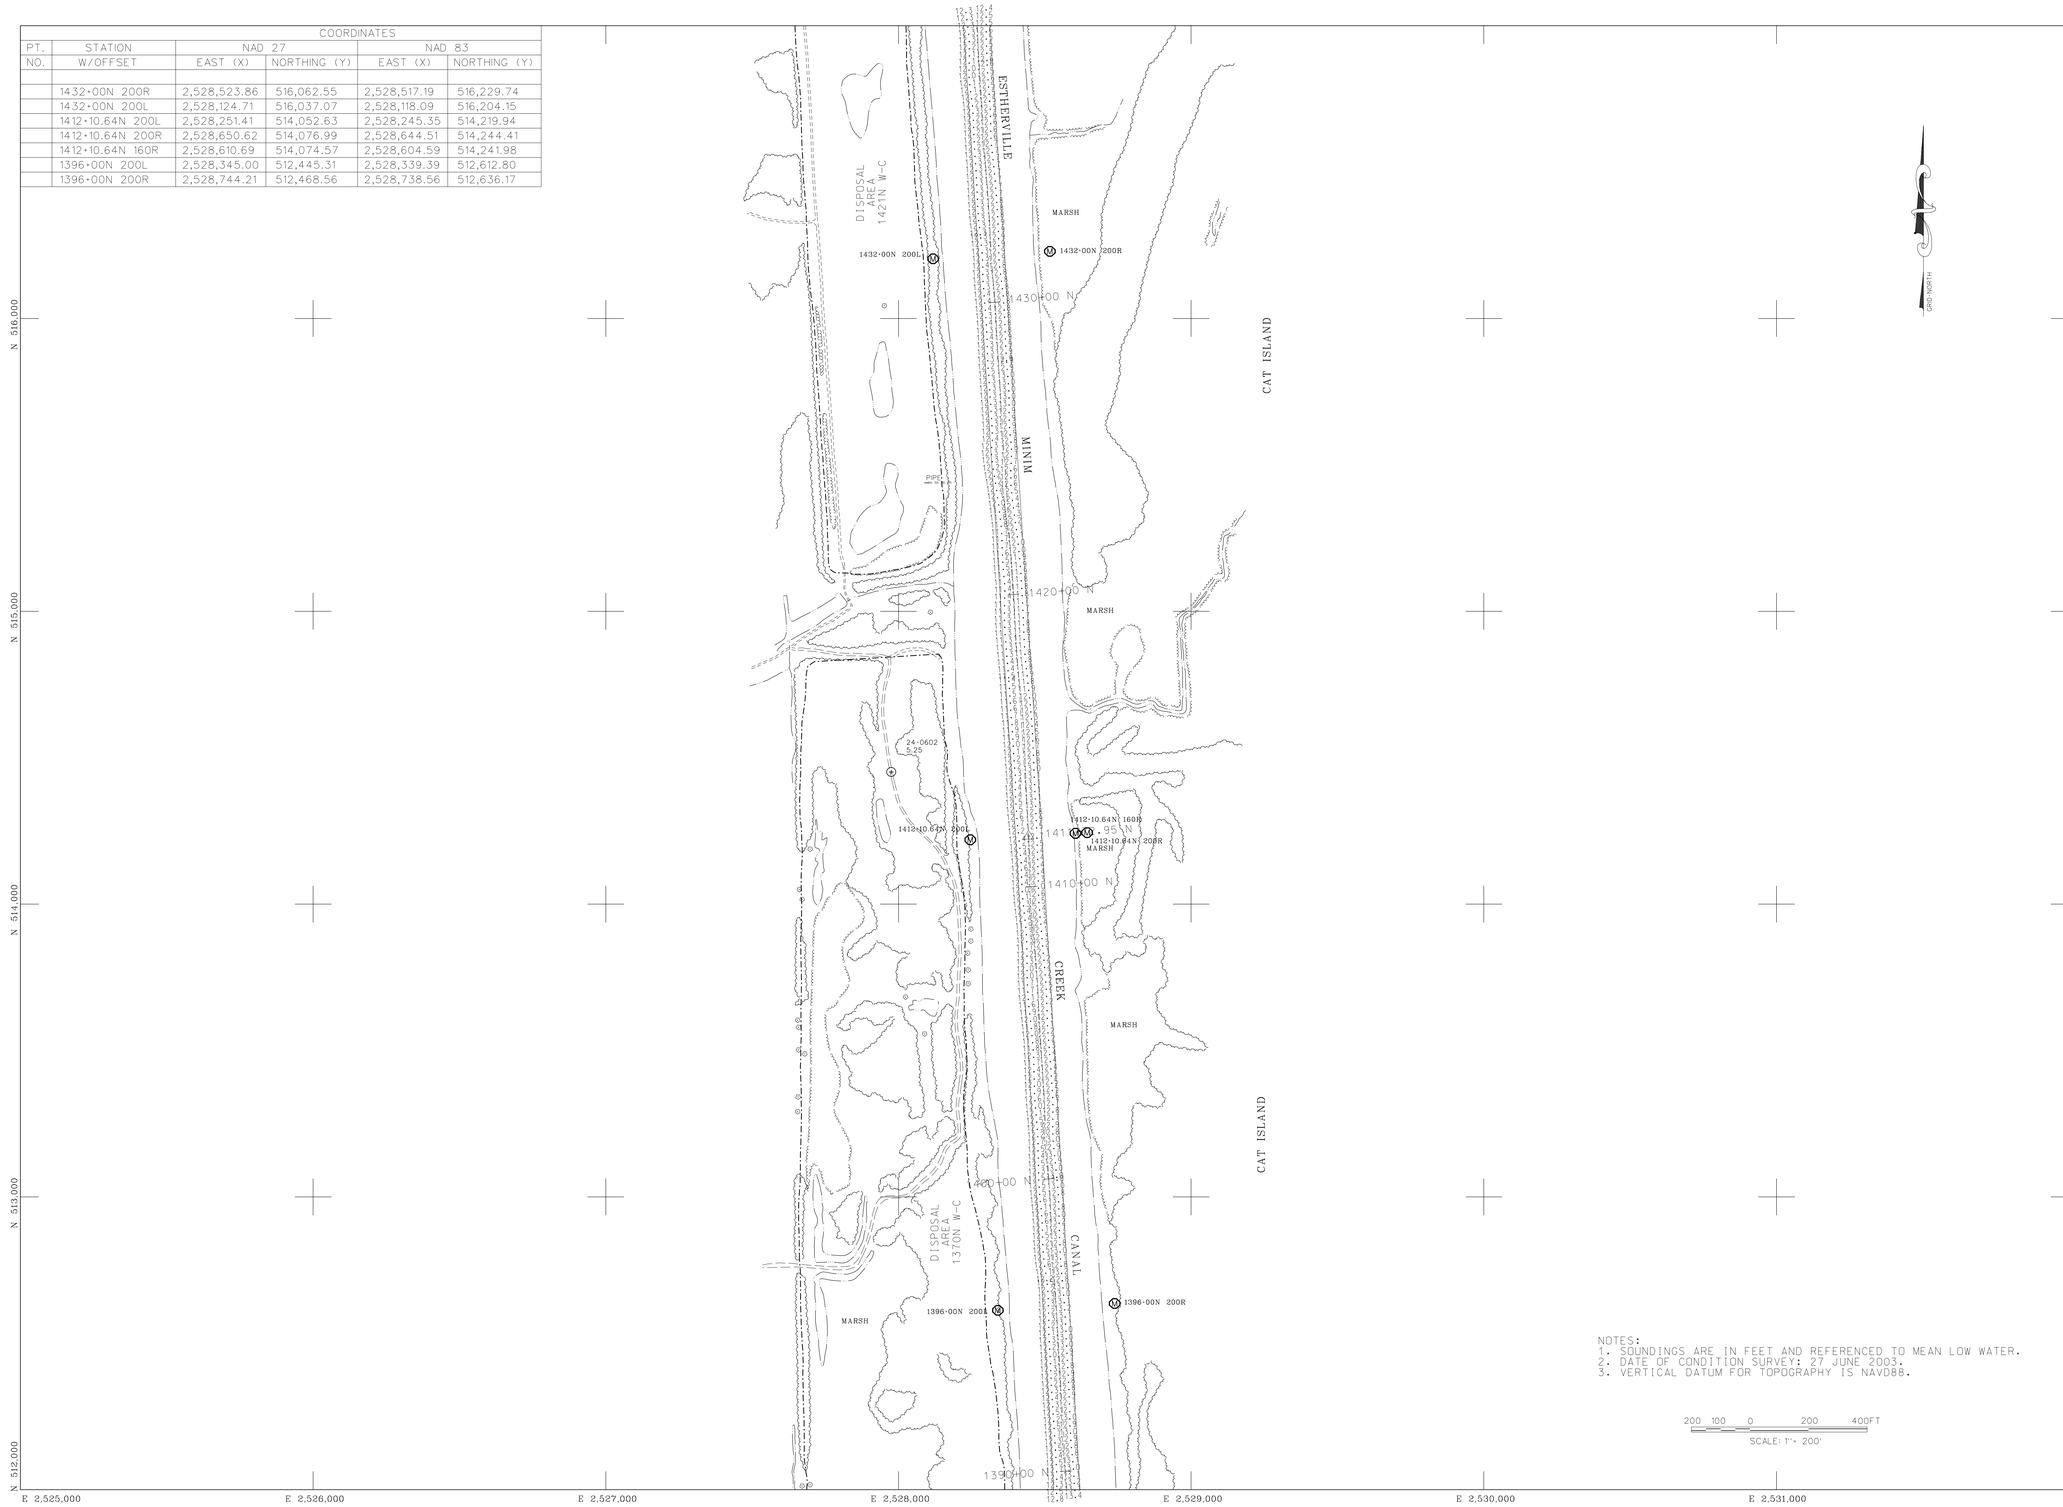

NOTES:
1. SOUNDINGS ARE IN FEET AND REFERENCED TO MEAN LOW WATER.
2. DATE OF CONDITION SURVEY: 27 JUNE 2003.
3. VERTICAL DATUM FOR TOPOGRAPHY IS NAVD88.

200 100 0 200 400FT
SCALE: 1"= 200'

U.S. Army Corps of Engineers
Charleston District
69A Hagood Ave
Charleston, SC 29403-5107

LEGEND

BUILDING
FENCE
GUARD RAIL
TREE LINE
INDIVIDUAL TREE
POWER POLE
LIGHT POLE
WATER
WALL
RETAINING WALL
SHRUB
BRUSH-MARSH LINE
POST
PAVED ROAD
UNPAVED ROAD
NAVAID GREEN G-46
NAVAID RED R-45
DISPOSAL AREA
GPS CONTROL POINT 16-1402 5.93
H&V CONTROL 32.6 LIGHT
U S HIGHWAY
STATE HIGHWAY
ROAD NUMBER 30
WATERWAY
ANCHORAGE A
WRECK W
MONUMENT M

WINYAH BAY TO CHARLESTON
SHEET INDEX

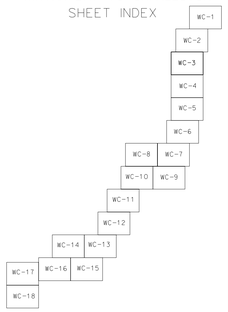

SPECIAL NOTE: THE INFORMATION SHOWN ON THIS DRAWING REPRESENTS THE RESULTS OF SURVEYS MADE ON THE DATES INDICATED ON EACH MAP AND CAN ONLY BE CONSIDERED AS INDICATING THE GENERAL CONDITIONS EXISTING ON THAT DATE.

NOTE:

ALL COORDINATES SHOWN ARE IN THE NAD 83 SOUTH CAROLINA STATE PLANE COORDINATE SYSTEM AND VERTICAL DATUM IS NAVD 88. OFFSET MONUMENTATION (M) GOVERNMENT FURNISHED FOR INFORMATION ONLY.

PREPARED BY:

NOVA Digital Systems, INC.
PHOTOGRAMMETRIC ENGINEERING/SURVEYING & GIS SERVICES
600 TOWNE CENTRE BLVD, SUITE 400 PINEVILLE, NC 28134
PH. (704) 889-5818

FROM AERIAL PHOTOGRAPHY
FLOWN APRIL 19 - 2001
AT A SCALE 1" = 1000'

ATLANTIC INTRACOASTAL WATERWAY

STA. 1389+37N TO STA. 1439+46N

WINYAH BAY TO CHARLESTON SOUTH CAROLINA

SIZE	DRAWING NO.	
E	8932	
	DACW60-03-B-00XX	8932wc03.dgn

SCALE: 1"= 200' SHEET 3 OF 62