COORDINATES					
PT.	STATION	NAD 27		NAD 83	
NO.	W/OFFSET	EAST (X)	NORTHING (Y)	EAST (X)	NORTHING (Y)
	1905+91.29 1700R	2,186,412.14	281,672.19	2,186,463.73	281,782.56
	1920+91.29 720L	2,187,880.69	279,232.97	2,187,932.54	279,343.48
	1935+91.29 720L	2,187,196.03	277,898.34	2,187,248.01	278,008.78
	1950+91.29 1200R	2,184,803.04	277,440.08	2,184,855.04	277,550.28

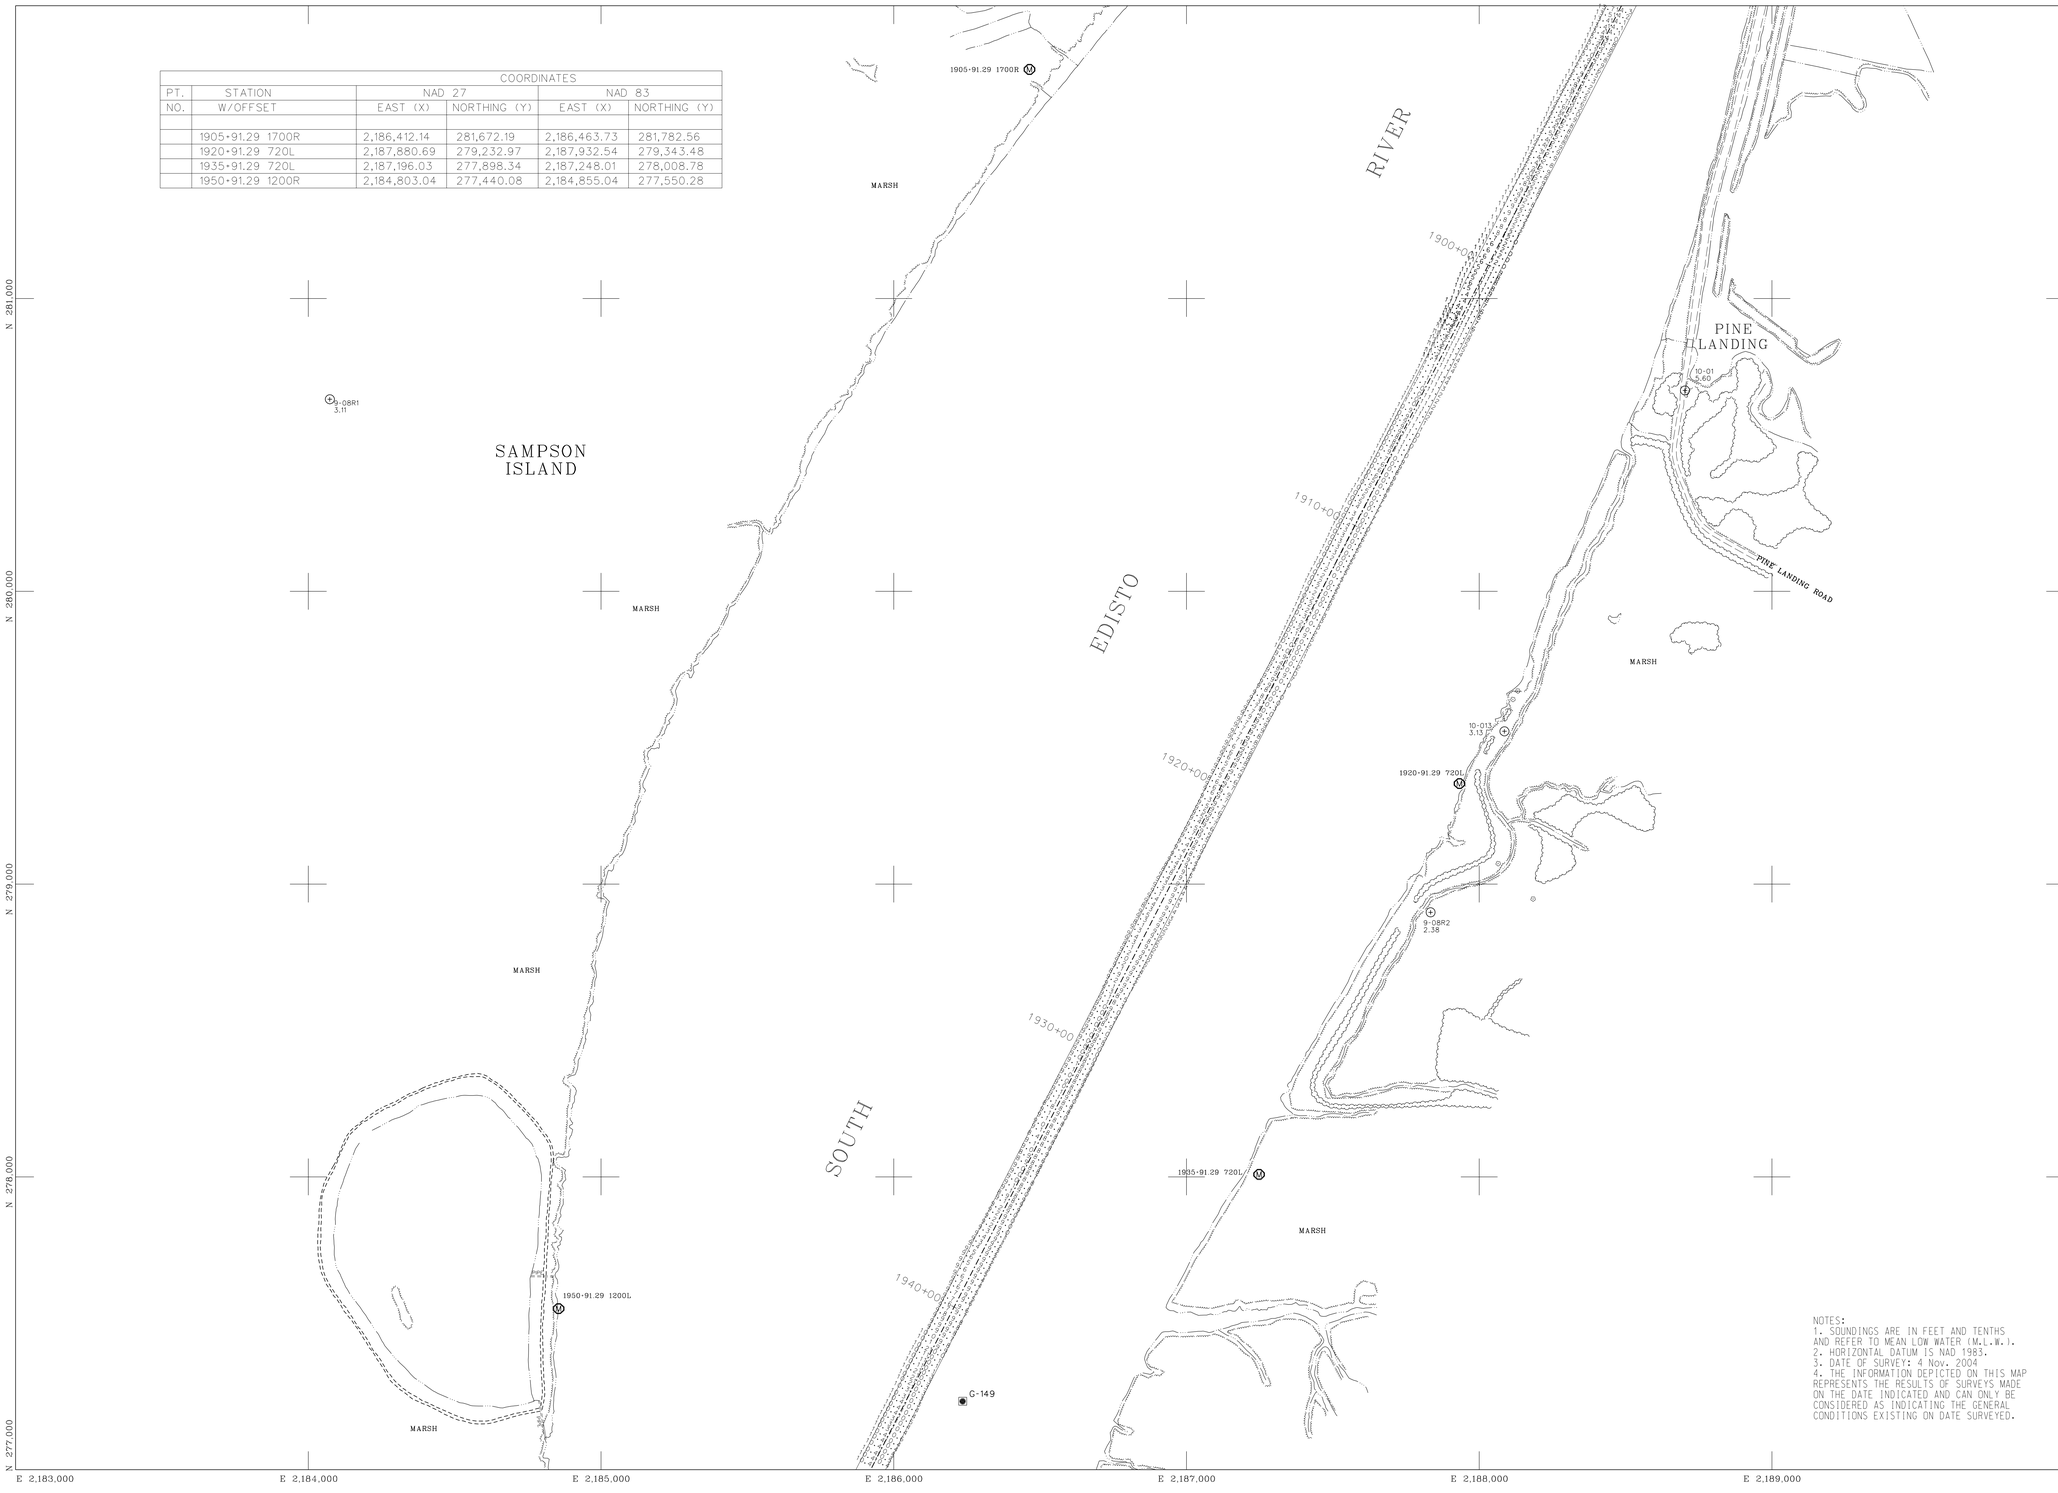

NOTES:
1. SOUNDINGS ARE IN FEET AND TENTHS AND REFER TO MEAN LOW WATER (M.L.W.).
2. HORIZONTAL DATUM IS NAD 1983.
3. DATE OF SURVEY: 4 Nov. 2004
4. THE INFORMATION DEPICTED ON THIS MAP REPRESENTS THE RESULTS OF SURVEYS MADE ON THE DATE INDICATED AND CAN ONLY BE CONSIDERED AS INDICATING THE GENERAL CONDITIONS EXISTING ON DATE SURVEYED.

U.S. Army Corps of Engineers
Charleston District
69A Hagood Ave
Charleston, SC 29403-5107

LEGEND

BUILDING
FENCE
GUARD RAIL
TREE LINE
INDIVIDUAL TREE
POWER POLE
LIGHT POLE
WATER
WALL
RETAINING WALL
SHRUB
BRUSH-MARSH LINE
POST
PAVED ROAD
UNPAVED ROAD
NAVAID GREEN G-46
NAVAID RED R-45
BERM
GPS CONTROL POINT B-1402 97.6 93
H&V CONTROL 1.89 1.89
U S HIGHWAY
STATE HIGHWAY
ROAD NUMBER 30
WATERWAY
ANCHORAGE A
WRECK W
MONUMENT M

ATLANTIC INTRACOASTAL WATERWAY (AIWW).
CHARLESTON - S.C.

PLANIMETRIC MAP

CHARLESTON TO PORT ROYAL
SHEET INDEX

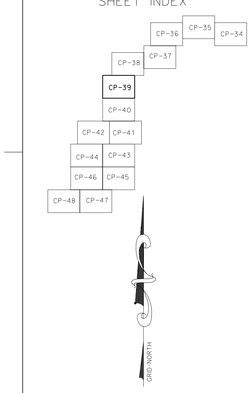

200 100 0 200 400FT
SCALE: 1"= 200'

NOTE:

ALL COORDINATES SHOWN ARE IN THE NAD 83 SOUTH CAROLINA STATE PLANE COORDINATE SYSTEM AND VERTICAL DATUM IS NAVD 88. OFFSET MONUMENTATION (M) GOVERNMENT FURNISHED FOR INFORMATION ONLY.

PREPARED BY:

NOVA Digital Systems, INC
PHOTOGRAMMETRIC ENGINEERING,SURVEYING & GIS SERVICES
600 TOWNE CENTRE BLVD.SUITE 400 PINEVILLE,NC 28134
PH.704/889-5050

FROM AERIAL PHOTOGRAPHY
FLOWN APRIL 19 - 2001
AT A SCALE 1" = 1000'

SIZE	DRAWING NO.
E	9013aiwcpV-HP0039.dgn

SCALE: 1"= 200' | SHEET 37 OF 66